



# TownTune Asymmetric DR

## BDP266 LED109-4S/740 II DM10 CLO SRT SRB

TOWNTUNE ASYMMETRIC DR - LED module 10900 lm - LED - 740 neutral white - 220 to 240 V - 50 or 60 Hz - Safety class II - Distribution medium 10 - Polycarbonate bowl/cover clear - Grey - Philips standard surge protection level kV - - - Side-entry for diameter 48-60 mm

### Product data

General Information	
Lamp family code	LED109 [ LED module 10900 lm]
Light source colour	740 neutral white
Light source replaceable	Yes
Number of gear units	1 unit
Driver included	Yes
Optical cover/lens type	PCC [ Polycarbonate bowl/cover clear]
Luminaire light beam spread	12° - 76° × 157°
Control interface	DALI
Connection	Internal connector
Cable	-
Protection class IEC	Safety class II
Flammability mark	F [ For mounting on normally flammable surfaces]
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	2 years

Outdoor optic type	Distribution medium 10
Constant light output	Yes
Number of products on MCB	11
RoHS mark	RoHS mark
LED engine type	LED
Product Family Code	BDP266 [ TOWNTUNE ASYMMETRIC DR]

### Light Technical

Upward light output ratio	0
Standard tilt angle post-top	-
Standard tilt angle side entry	0°

### Operating and Electrical

Input voltage	220 to 240 V
Input frequency	50 or 60 Hz
Initial CLO power consumption	66 W
Average CLO power consumption	75 W

# TownTune Asymmetric DR

End CLO power consumption	66 W
Inrush current	46 A
Inrush time	0.250 ms
Power factor (min.)	0,9

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Housing material	Aluminium die-cast
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Polycarbonate
Fixation material	Aluminum
Mounting device	48/60S [ Side-entry for diameter 48-60 mm]
Optical cover/lens shape	Curved
Optical cover/lens finish	Clear
Overall height	70 mm
Overall diameter	477 mm
Effective projected area	0.05 m <sup>2</sup>

## Approval and Application

Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK09 [ 10 J]
Surge protection (common/differential)	Philips standard surge protection level kV

## Initial Performance (IEC Compliant)

Initial luminous flux	10900 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	104 lm/W
Init. Corr. colour temperature	4000 K
Init. colour rendering index	≥70
Initial chromaticity	5 SDCM
Initial input power	66 W
Power consumption tolerance	+/-11%

## Application Conditions


Ambient temperature range	-40 to +50 °C
Maximum dimming level	10%

## Product Data

Full product code	871869949762000
Order product name	BDP266 LED109-4S/740 II DM10 CLO SRT SRB
EAN/UPC – product	8718699497620
Order code	49762000
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (I2NC)	912300024203
Net weight (piece)	6.460 kg



## Dimensional drawing

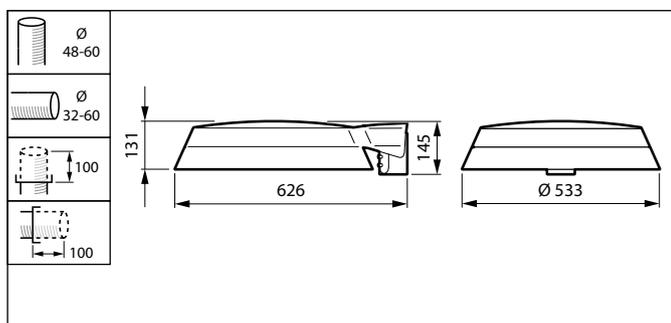

TownTune BDP260-273

## TownTune Asymmetric DR

