



ColorGraze QLX Powercore

BCS467 15x30 RGB 15W L914

15° x 30° - 914 mm - aluminium

Many architectural structures need a linear fixture capable of illuminating several storeys with minimal setback and reduced power consumption. Property owners/end users need a controllable product capable of dynamic illumination to draw attention to their establishments and emphasize their brands. Graze QLX Powercore is capable of illuminating over 10 meters at very close setback distances. Powercore technology enables simple installation and long product run lengths.

Product data

General Information		Controls and Dimming	
Lamp family code	LED-HB [LED High Brightness]	Dimmable	Yes
Light source replaceable	No	Mechanical and Housing	
Driver included	Yes	Housing material	Aluminum extruded
Luminaire light beam spread	15° x 30°	Optic material	Polycarbonate
Protection class IEC	Safety class I (I)	Optical cover/lens material	Polycarbonate
CE mark	CE mark	Length	914 mm
UL mark	UL and cUL mark	Approval and Application	
Lifetime to 70% luminous flux	100000 h	Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Operating and Electrical		Mech. impact protection code	IK10 [20 J vandal-resistant]
Input voltage	100 to 277 V	Vibration standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
Input frequency	50 to 60 Hz		

ColorGraz e QLX Powercore

Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.

Application Conditions

Ambient temperature range -40 to +50 °C

Product Data

Full product code	871829160449500
Order product name	BCS467 15x30 RGB 15W L914
EAN/UPC – product	8718291604495
Order code	60449500
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910503703382
Net weight (piece)	3.800 kg

Initial Performance (IEC Compliant)

Initial input power 15 W

Over Time Performance (IEC Compliant)

Lumen Maintenance 50% at 25°C 100000

Reported

Lumen Maintenance 50% at 50°C 80000

Reported


Lumen Maintenance 70% at 25°C 80000

Reported

Lumen Maintenance 70% at 50°C 60000

Reported

Dimensional drawing

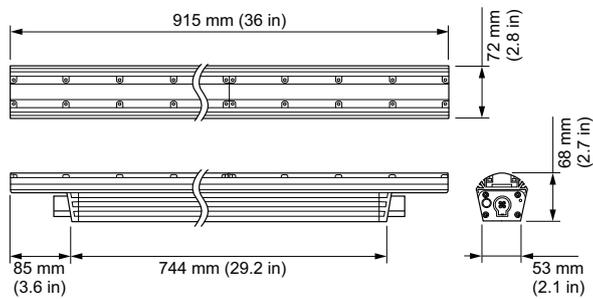

Graze

