



# LuxSpace Mini, recessed

## DN561B LED8S/830 PSED-E C WH

LuxSpace2 Mini Deep recessed - LED Module, system flux 800 lm - 830 warm white - Power supply unit with DALI interface external, DC compatible for central emergency lighting - High-gloss mirror - White

Customers are looking to optimize all their resources, and that means not just their running costs (energy, etc.) but also their human resources. Energy savings are therefore a priority, but they must not have an adverse effect on the well-being of employees, who need a pleasant environment in order to be more productive, or on customers, who want to enjoy their shopping experience. LuxSpace provides the perfect combination of efficiency, light comfort and design, without compromising on lighting performance (color rendering and color uniformity). It offers a wide choice of options for creating the desired ambience, no matter the application.

### Product data

General Information		Driver/power unit/transformer	Power supply unit with DALI interface
Number of light sources	1 pc		external, DC compatible for central emergency lighting
Lamp family code	LED8S [ LED Module, system flux 800 lm]		
Light source color	830 warm white		
Cap-Base	- [ - ]	Driver included	Yes
Light source replaceable	No	Optic type	High-gloss mirror
Number of gear units	1 unit	Optical cover/lens type	-
Gear	-	Luminaire light beam spread	75°
		Emergency lighting	-
		Control interface	DALI
		Connection	Push-in connector and pull relief

# LuxSpace Mini, recessed

Cable	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 850 °C, duration 5 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
UL mark	-
Warranty period	5 years
Decorative accessories	-
Remarks	<p>*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.</p>
Constant light output	No
Number of products on MCB of 16 A type	50
B	
RoHS mark	-
Product family code	DN561B [ LuxSpace2 Mini Deep recessed]

<b>Light Technical</b>	
Optical cover/lens type accessory	-

<b>Operating and Electrical</b>	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Inrush current	5 A
Inrush time	0.05 ms
Power Factor (Min)	0.8

<b>Controls and Dimming</b>	
Dimmable	Yes

<b>Mechanical and Housing</b>	
Housing configuration	-
Housing Material	Aluminum die-cast
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Frosted

Overall height	86 mm
Overall diameter	164 mm

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	780 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	98 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM <3
Initial input power	8 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful	5 %
life 50000 h	
Lumen maintenance at median useful	L90
life* 50000 h	

## Application Conditions



Ambient temperature range	+10 to +25 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes (relates to presence/ movement detection and daylight harvesting)

## Product Data

Full product code	871829193770800
Order product name	DN561B LED8S/830 PSED-E C WH
EAN/UPC - Product	8718291937708
Order code	910503706516
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910503706516
Net Weight (Piece)	0.725 kg

## LuxSpace Mini, recessed

### Dimensional drawing

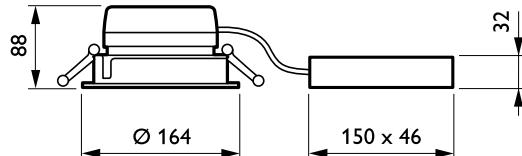

LuxSpace gen2 Mini DN560B-DN561C

