



## LuxSpace Accent

### RS740B LED49S/830 PSE-E MB WH

LuxSpace Accent Compact G3 – LED Module, system flux 4900 lm – 830 warm white – Power supply unit external, DC compatible for central emergency lighting – Medium beam – White

Retailers are increasingly having to contend with rising energy prices. At the same time, they need to retain the quality of light they are used to, flexibility in architectural integration, and the right light effects to catch the customer's eye. Last but not least, they need future-proof solutions that will enable them to implement differentiating concepts in their store. Delivering high-quality light, punch in the beam and outstanding luminous efficacy, LuxSpace Accent is the ideal energy-efficient solution for today's demanding retail environments, covering a wide variety of lighting applications, including CrispWhite and PremiumWhite for fashion stores and Food recipes for supermarkets.

#### Product data


General Information	
Number of light sources	1 pc
Lamp family code	LED49S [ LED Module, system flux 4900 lm]
Beam angle of light source	120 °
Light source color	830 warm white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit external, DC compatible for central emergency lighting
Driver included	Yes
Optic type	Medium beam
Optical cover/lens type	Clear glass

Luminaire light beam spread	30°
Control interface	–
Connection	Push-in connector and pull relief
Cable	–
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 5 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years

# LuxSpace Accent

Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.	Mech. impact protection code	IK02 [ 0.2 J standard]
<b>Initial Performance (IEC Compliant)</b>			
Initial luminous flux (system flux)	4900 lm		
Luminous flux tolerance	+/-10%		
Initial LED luminaire efficacy	112.6 lm/W		
Init. Corr. Color Temperature	3000 K		
Init. Color Rendering Index	≥80		
Initial chromaticity	(0.43, 0.40) SDCM <3		
Initial input power	43.5 W		
Power consumption tolerance	+/-10%		
<b>Over Time Performance (IEC Compliant)</b>			
Control gear failure rate at median useful	5 %		
life 50000 h			
Lumen maintenance at median useful	L80		
life* 50000 h			
<b>Application Conditions</b>			
Ambient temperature range	+10 to +40 °C		
Performance ambient temperature Tq	25 °C		
Suitable for random switching	Yes (relates to presence/ movement detection and daylight harvesting)		
<b>Product Data</b>			
Full product code	871869697314100		
Order product name	RS740B LED49S/830 PSE-E MB WH		
EAN/UPC - Product	8718696973141		
Order code	910500459052		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	1		
Material Nr. (12NC)	910500459052		
Net Weight (Piece)	0.740 kg		
<b>Approval and Application</b>			
Ingress protection code	IP44 [ Wire-protected, splash-proof]		



## Dimensional drawing

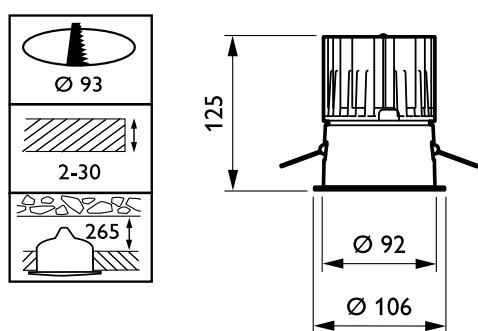

LuxSpace Accent RS730B-RS752B


# LuxSpace Accent

## Photometric data

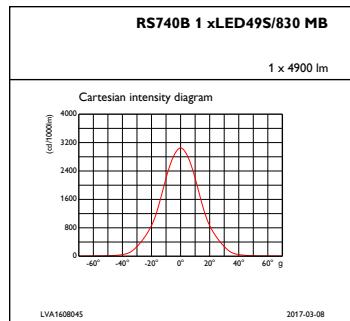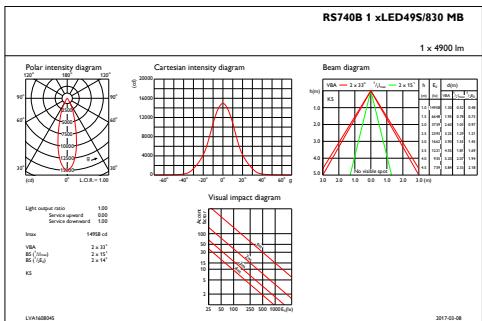

IFAS1\_RS740B1xLED49S830MB

IFCC1\_RS740B1xLED49S830MB



IFPC1\_RS740B1xLED49S830MB

