




QDA-A2MAR

| | |
|-----------------------------|---|
| Supported Drives | 2 x M.2 2280 SATA SSD |
| Host Interface | SATA 6Gbps |
| Supported Operating Systems | 1. QTS 4.4.1 (or later) 2. Windows: Windows 7, 8.1, 10, Windows Server 2012 R2 3. Ubuntu |
| Dimension | 100,5 × 69,9 × 9,5 mm |
| Weight | 0.1 kg |
| RAID Support | RAID 0, 1 |
| Note | <p>The connected drive may not reach its optimal performance due to protocol translation and some overhead.</p> <p>All the drive data will be cleared upon drive initialization or RAID mode switching with the QDA-A2MAR. Ensure that all data is backed up beforehand.</p> <p>Window and Linux PC supports all four modes mentioned above. QTS does not support Individual mode.</p> <p>It is recommended that only drives with identical model numbers and capacities are used to create a RAID 0/1 group because the total storage space will be equal to the size of the smallest drive.</p> <p>The SATA controller of the PC must support port multipliers to recognize two drives in the Individual mode configuration. Consult your system provider and install the latest drivers for your SATA controller.</p> <p>Installing a QNAP disk adapter in another QNAP disk adapter is not supported. (e.g. QDA-A2MAR cannot be installed in the QDA-A2AR.)</p> <p>TR-002/TR-004 RAID expansion enclosures do not support QDA-A2AR/QDA-A2MAR.</p> <p>Computer SATA ports or the USB to SATA adapters/cables that do not support 12V output (+12V_SATA) are not compatible with the QDA-A2MAR. Please consult your computer vendor for the SATA port voltage output before purchasing the QDA-A2MAR.</p> <p>QTS identifies the drives of QDA-A2MAR as a single volume. Installing at least two QDA-A2MAR in the NAS is required to use Qtier function.</p> |

Architecture Diagram

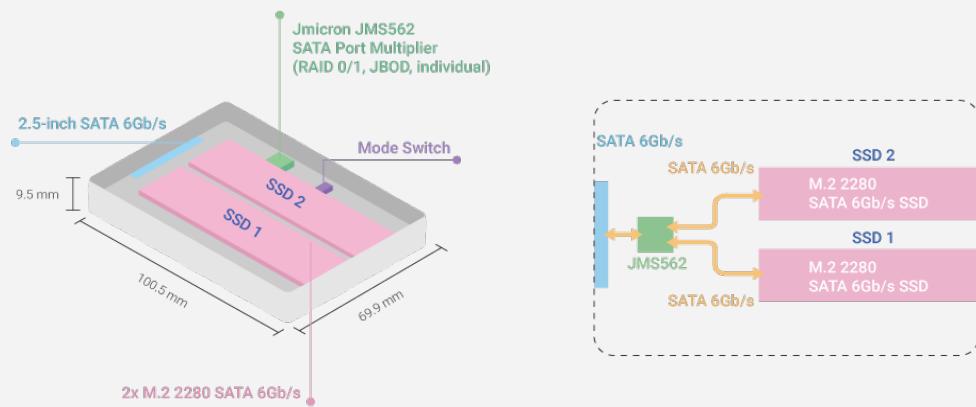

Nota: Utilice solamente módulos de memoria QNAP para mantener el rendimiento y la estabilidad del sistema. Para dispositivos NAS con más de una ranura de memoria, use módulos QNAP con las mismas especificaciones.

Advertencia: Usar módulos no compatibles puede degradar el rendimiento, provocar errores o impedir el arranque del sistema operativo.

* Entorno de prueba de nivel de sonido:

Consulte la norma ISO 7779; unidad de disco duro cargada; posición de observador; datos medios de 1 metro delante del NAS en funcionamiento.

Las imágenes de producto son para fines ilustrativos y pueden diferir del producto real. Debido a diferencias en los monitores, los colores de los productos también pueden parecer distintos de los que se muestra en el sitio.

Los diseños y las especificaciones están sujetos a modificaciones sin previo aviso.