

This report will not be used for social proof function in China market.

Test report No:

6060133.50

TEST REPORT

Electromagnetic Compatibility (EMC)

Identification of item tested	Air Pump
Trademark	N/A
Model and /or type reference	#62130, #62155
Ratings	4.8 V, 55 W
Test Laboratory / address	DEKRA Testing and Certification (Shanghai) Ltd. 3 F., No. 250 Jiangchangsan Road, Jing'an District, Shanghai City, 200436, China
Applicant's name / address	Bestway (Hongkong) International Ltd Suite 713, 7/Floor, East Wing, Tsim Sha Tsui Centre, 66 Mody Road, Kowloon, Hongkong
Test method requested, standard	EN 55014-1:2006+A1:2009+A2:2011 EN 55014-1:2017; EN 55014-2:2015;
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Xingyu He Test Engineer 
Approved by (name / position & signature)	Zuyao Fan Project Manager 
Date of issue	2019-10-15
Report template No	TRF_EN55014-1_EN55014-2_EMCC01 V1.0

INDEX

	page
Competences and Guarantees.....	4
General conditions.....	4
Uncertainty.....	4
Environmental conditions.....	4
Possible test case verdicts	5
Definition of symbols used in this test report	5
Abbreviations	5
Document History	6
Remarks and Comments	6
1 General Information.....	7
1.1 General Description of the Item(s)	7
1.2 Environment	8
1.3 Test data	8
1.4 Classification according to EN 55014-2	9
2 Description of Test Setup	10
2.1 Operating mode(s) used for tests.....	10
2.2 Port(s) of the EUT	10
2.3 Support / Auxiliary equipment / unit / software for the EUT	10
2.4 Test Configuration / Block diagram used for tests	11
3 Verdict summary section	12
3.1 Standards	12
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	12
3.3 Overview of results.....	13
4 Emission Test Results	14
4.1 Conducted disturbance voltage - Mains.....	14
4.2 Disturbance power (30 MHz – 300 MHz).....	15
4.3 Radiated electromagnetic disturbances (30 – 1000 MHz).....	16
4.4 Discontinuous disturbance (clicks) on AC power leads	21
4.5 Harmonic current emissions.....	22
4.6 Voltage changes, voltage fluctuations and flicker	23
5 Immunity Test Results	24
5.1 Performance (Compliance) criteria	24
5.1.1 Performance criteria related to immunity tests	24
5.1.2 Manufacturer defined performance criteria.....	24

5.2	Monitored – Checked Functions / Parameters.....	25
5.3	Electrostatic discharge immunity.....	26
5.4	Radio-frequency electromagnetic fields immunity	27
5.5	Electrical Fast Transients immunity	28
5.6	Surge transient immunity	29
5.7	Injected currents (RF common mode) immunity	30
5.8	Power supply interruptions and dips immunity.....	31
6	Identification of the Equipment Under Test	32
7	Annex 1 – Measurement Uncertainties	33
8	Annex 2 – Used Equipment.....	33
9	Annex 3 – Test Photos	34

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

UNCERTAINTY

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards.

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. Refer to the Annex 1 for further information.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa – 106 kPa

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT.			
<input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.			
Decimal separator used in this report	<input checked="" type="checkbox"/>	Comma (,)	<input type="checkbox"/> Point (.)

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report nr.	Date	Description
6060133.50	2019-10-15	First release.

REMARKS AND COMMENTS

The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).

The test results relate only to the samples tested.

According to the declaration from manufacturer, both models are identical except the model name

The test results stated in this report of model #62130 are also representative for the others.

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Description of the item	Air Pump
Model / Type number.....	#62130, #62155
Serial number	N/A
Trademark.....	N/A
Manufacturer.....	Bestway Inflatables & Material Corp No. 3065 Cao An Road , Shanghai 201812 , P. R. China
Factory	GOLEADER INDUSTRIES (JINHUA) CO., LTD. No.618 Wenxi Road, Jinpan Development New Zone, Jinhua, Zhejiang Province, 321025, China.

Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC: 100 – 240 V, 50/60 Hz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	DC: 12 V, 24 V, 12 / 24 V					
	<input checked="" type="checkbox"/>	Battery: 4.8 V					
Rated Power	4.8 V						
Clock frequencies	N/A						
Other parameters.....	N/A						
Mounting position.....	<input checked="" type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input type="checkbox"/>	Other:					

Intended use of the Equipment Under Test (EUT)
The apparatus as supplied for the test is Air Pump, intended for residential and commercial use. These products have no electronic control unit

No	Module/parts of test item	Type	Manufacturer
1	N/A		

No	Documents as provided by the applicant - Description	File name	Issue date
	N/A		

Modifications to the test item during testing	<input checked="" type="checkbox"/>	N/A	<input type="checkbox"/>	Supplemental information:
---	-------------------------------------	-----	--------------------------	---------------------------

Copy of marking plate:

N/A

1.2 Environment

The requirements and standards apply to equipment intended for use in:

<input checked="" type="checkbox"/>	Residential (domestic) environment.
<input checked="" type="checkbox"/>	Commercial and light-industrial environment.
<input type="checkbox"/>	Industrial environment.

1.3 Test data

Test Location	TUV Rheinland (Shanghai) Co., Ltd. Np.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China
Date(receive sample)	2018-10
Date (start test)	2018-10
Date (finish test)	2018-10

1.4 Classification according to EN 55014-2

The standard EN 55014-2 is subdivided in four categories. For each category, specific immunity requirements are formulated.

<input type="checkbox"/>	<p>Category I: Apparatus containing no electronic control circuitry.</p> <p><u>Examples:</u> Motor operated appliances, lighting toys, track sets without electronic control units, tools, heating appliances, UV and IR radiators and apparatus containing components such as electromechanical switches and thermostats.</p> <p>Electric circuits consisting of passive components (such as radio interference suppression capacitors or inductors, mains transformers and mains frequency rectifiers) are not considered to be electronic control circuitry.</p>
<input type="checkbox"/>	<p>Category II: transformer toys, dual supply toys, mains powered motor operated appliances, tools, heating appliances and similar electric apparatus (for example – UV radiators, IR radiators and microwave ovens) containing electronic control circuitry with no clock frequency higher than 15 MHz. (For toys, examples include educational computers, organs, track sets with electronic control units.)</p>
<input checked="" type="checkbox"/>	<p>Category III: equipment which in normal use, is not connected to a power network and has no cables attached. This category includes apparatus provided with rechargeable batteries, solar or other similar d.c. power sources which can be charged or operated by connecting the apparatus to the mains power. However, this apparatus shall also be tested as an apparatus in category II while it is connected to the mains network.(For toys, examples include musical soft toys, cord-controlled toys and motor-operated electronic toys.)</p>
<input type="checkbox"/>	<p>Category IV: All other apparatus covered by the scope of the EN 55014-2 standard.</p>
<p>Clock frequency: Fundamental frequency of any signal used in the device, excluding those which are solely used inside integrated circuits (IC).</p>	

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Operating mode	Operating mode description	Used for testing	
		Emission	Immunity
1	The EUT operates normally.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	. The EUT operates normally with charging	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3		<input type="checkbox"/>	<input type="checkbox"/>
4		<input type="checkbox"/>	<input type="checkbox"/>
5		<input type="checkbox"/>	<input type="checkbox"/>
<u>Supplemental information:</u>			

2.2 Port(s) of the EUT

Port name and description	Connected to / Termination	Cable		
		Length used during test [m]	Attached during test	Shielded
N/A			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
<u>Supplemental information:</u>				


2.3 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment / unit / software	Type / Version	Manufacturer	Supplied by
N/A			Applicant
			DEKRA
<u>Supplemental information:</u>			

2.4 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:

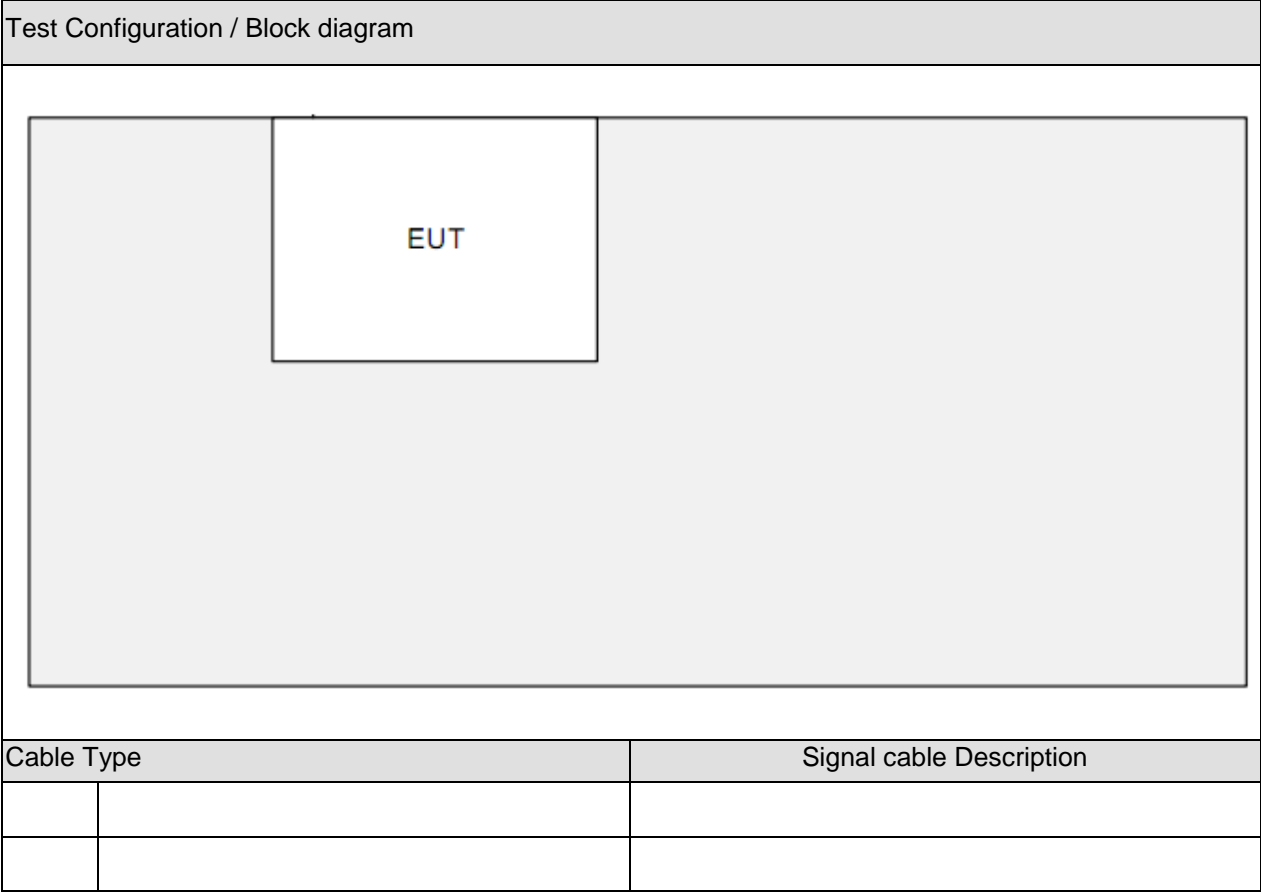

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
EN 55014-1	2017	Requirements for household appliances, electric tools and similar apparatus – Part 1: Emission.
EN 55016-2-1	2014	Methods of measurement of disturbances and immunity - Conducted disturbance measurements.
EN 55016-2-2	2010	Methods of measurement of disturbances and immunity – Measurement of disturbance power.
EN 55016-2-3 +A1 +A2	2010 2010 2014	Methods of measurement of disturbances and immunity - Radiated disturbance measurements.
EN 61000-3-2	2014	Limits for harmonic current emissions (equipment input current ≤ 16 A per phase).
EN 61000-3-3	2013	Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.
EN 55014-2	2015	Requirements for household appliances, electric tools and similar apparatus – Part 2: Immunity – Product family standard.
EN 61000-4-2	2009	Electrostatic discharge immunity test.
EN 61000-4-3 +A1 +A2	2006 2008 2010	Radiated, radio-frequency, electromagnetic field immunity test.
EN 61000-4-4	2012	Electrical fast transient/burst immunity test.
EN 61000-4-5	2014	Surge immunity test.
EN 61000-4-6	2014	Immunity to conducted disturbances, induced by radio-frequency fields.
EN 61000-4-11	2004	Voltage dips, short interruptions and voltage variations immunity tests.

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards:

N/A.

3.3 Overview of results

EMISSION TESTS – EN 55014-1			
Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted disturbance voltage at mains terminals (150 KHz – 30 MHz)	EN 55016-2-1	N/A	---
Conducted disturbance voltage at load terminals (150 KHz – 30 MHz)	EN 55016-2-1	N/A	---
Conducted disturbance voltage at additional terminals (150 KHz – 30 MHz)	EN 55016-2-1	N/A	---
Disturbance power (30 MHz to 300 MHz)	EN 55016-2-2	N/A	See 3)
Radiated electromagnetic disturbances (30 - 1000 MHz)	EN 55016-2-3	PASS	---
Discontinuous disturbance (clicks) on AC power leads	EN 55014-1	N/A	See 1)
<u>Supplementary information:</u> 1) Exemptions from click measurements applicable (clause 4.2.3). 2) Not applicable because no test requirements have been specified for DC/battery powered apparatus. 3) According to clause 4.3.4.2 procedure (a) of the CISRP 14-1 standard the EUT is deemed to comply in the frequency range from 300 MHz to 1000 MHz without further measurements.			

EMISSION TESTS – EN 61000-3-2, EN 61000-3-3			
Requirement – Test case	Basic standard(s)	Verdict	Remark
Harmonic current emissions	EN 61000-3-2	N/A	---
Voltage changes, voltage fluctuations and flicker	EN 61000-3-3	N/A	---
<u>Supplementary information:</u> 1) The EUT is regarded as an "Equipment with rated power of ≤ 75 W". According to "Clause 7, Figure 1 - Flowchart for determining conformity" the EUT is deemed to comply with the requirements of the EN 61000-3-2 standard. 2) The EUT is regarded as a professional equipment with a total rated power greater than 1 KW. The test is not applicable.			

IMMUNITY TESTS – EN 55014-2			
Requirement – Test case	Basic standard(s)	Verdict	Remark
Electrostatic discharge	EN 61000-4-2	PASS	---
Radio-frequency electromagnetic fields	EN 61000-4-3	PASS	---
Fast transients	EN 61000-4-4	N/A	---
Surge transient	EN 61000-4-5	N/A	---
Injected currents (radio-frequency common mode)	EN 61000-4-6	N/A	---
Voltage dips and short interruptions	EN 61000-4-11	N/A	---
<u>Supplementary information:</u> 1) Not applicable because no test requirements have been specified for DC/battery powered apparatus. 2) The equipment is classified as category 1 equipment according to EN 55014-2; no immunity tests are applicable.			

4 EMISSION TEST RESULTS

4.1	Conducted disturbance voltage - Mains	VERDICT: N/A
-----	---------------------------------------	--------------

Standard	EN 55014-1
Basic standard	EN 55016-2-1

Limits

Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾	Limit: AV [dB(μV) ¹⁾	IF BW	Detector(s)
0,15 - 0,50	66 - 56 ²⁾	59 - 46 ²⁾	9 KHz	QP, CAV
0,50 - 5,0	56	46	9 KHz	QP, CAV
5,0 - 30	60	50	9 KHz	QP, CAV
¹⁾ At the transition frequency, the lower limit applies. ²⁾ The limit decreases linearly with the logarithm of the frequency.				

Performed measurements

Tested terminal(s) / port	<input checked="" type="checkbox"/>	AC mains input power	<input checked="" type="checkbox"/>	N	<input checked="" type="checkbox"/>	L1	<input type="checkbox"/>	L2	<input type="checkbox"/>	L3
	<input type="checkbox"/>	DC mains input power	<input type="checkbox"/>	Positive (+)			<input type="checkbox"/>	Negative (-)		
Voltage — Mains [V]	230 Vac									
Frequency — Mains [Hz]	50 Hz , 60 Hz									
Test method applied	<input checked="" type="checkbox"/>	Artificial mains network								
	<input type="checkbox"/>	Voltage probe								
Test setup	<input type="checkbox"/>	Table top	<input type="checkbox"/>	Artificial hand applied						
	<input type="checkbox"/>	Floor standing	<input type="checkbox"/>	Other:						
	Refer to the Annex 3 for test setup photo(s).									
Operating mode(s) used	Mode 4									
Remark	—									

4.2 Disturbance power (30 MHz – 300 MHz)	VERDICT: N/A
---	---------------------

Standard	EN 55014-1
Basic standard	EN 55016-2-2

Limits

Frequency range [MHz]	Limit: QP [dB(pW)]	Limit: AV [dB(pW)]	IF BW	Detector(s)
30 - 300	45 – 55 ¹⁾	35 – 45 ¹⁾	120 KHz	QP, CAV
Margin				
200 - 300	0 – 10 ¹⁾	---	120 KHz	QP, CAV
¹⁾ The limit increases linearly with the frequency.				

Performed measurements

Port(s) under test					
<input checked="" type="checkbox"/>	AC mains input power	<input type="checkbox"/>	Load	<input type="checkbox"/>	Control
<input type="checkbox"/>	Other:	<input type="checkbox"/>	Other:	<input type="checkbox"/>	Other:
Voltage — Mains [V]					
230 Vac					
Frequency — Mains [Hz]					
50 Hz, 60 Hz					
Test setup					
<input checked="" type="checkbox"/>		Table top		<input type="checkbox"/> Floor standing	
<input type="checkbox"/>		Other:			
Refer to the Annex 3 for test setup photo(s).					
Conditions for exemption from measurements above 300 MHz		<input checked="" type="checkbox"/> "Limits" reduced by "Margin" applied and passed			
		<input checked="" type="checkbox"/> Maximum clock frequency < 30 MHz			
Operating mode(s) used		Mode 1			
Remark		---			

4.3	Radiated electromagnetic disturbances (30 – 1000 MHz)	VERDICT: PASS
------------	--	----------------------

Standard	EN 55014-1
Basic standard	EN 55016-2-3
Test method	Antenna method according to EN 55016-2-3 standard.

Limits

Frequency [MHz]	Limit: QP [dB(μV/m) ¹⁾]			IF BW	Detector
	@3 m.	@5 m.	@10 m.		
30 - 230	40	36	30	120 KHz	QP
230 - 1000	47	43	37	120 KHz	QP

¹⁾ At the transition frequency, the lower limit applies.

Performed measurements

Port under test	Enclosure	
Voltage – Mains [V]	DC 4.8V(for working mode), DC 5V(for charging mode)	
Frequency – Mains [Hz]	---	
Test method applied	<input checked="" type="checkbox"/>	OATS or SAC with measurement distance [m]: 3 m.
	<input type="checkbox"/>	OATS or SAC with measurement distance [m]: 5 m.
	<input type="checkbox"/>	OATS or SAC with measurement distance [m]: 10 m.
Test setup	<input checked="" type="checkbox"/>	Equipment on a table of 80 cm height
	<input type="checkbox"/>	Equipment on the floor (insulated from ground plane)
	<input type="checkbox"/>	Other:
Refer to the Annex 3 for test setup photo(s).		
Operating mode(s) used	Mode 1, 2	
Remark	---	

See next page.

Measurement data	<input checked="" type="checkbox"/>	Horizontal	<input type="checkbox"/>	Vertical
Operating mode / voltage / frequency used during the test		Mode 1		


Horizontal:

Final quasi-peak measurement results:


Frequency (MHz)	QuasiPeak (dB µ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB µ V/m)
230.426250	29.3	1000.0	120.000	100.0	H	90.0	17.5	17.7	47.0
357.011250	37.4	1000.0	120.000	100.0	H	90.0	21.9	9.6	47.0
781.265000	33.5	1000.0	120.000	100.0	H	45.0	28.2	13.6	47.0
934.646250	34.9	1000.0	120.000	100.0	H	45.0	28.8	12.1	47.0

Note:

1. All Readings below 1GHz are performed with Quasi-Peak measurements as necessary.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

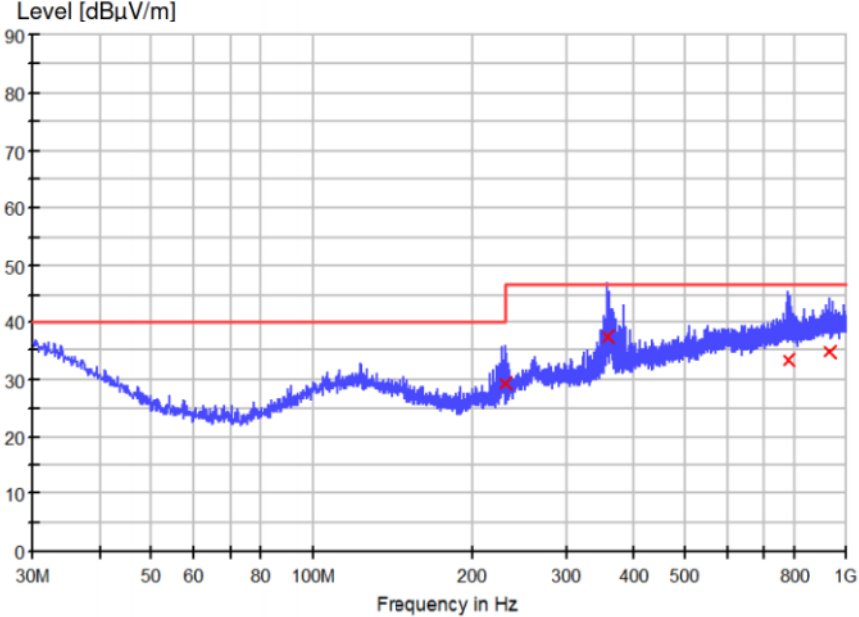Measurement data	<input type="checkbox"/>	Horizontal	<input checked="" type="checkbox"/>	Vertical					
Operating mode / voltage / frequency used during the test		Mode 1							
Vertical:									
									
Final quasi-peak measurement results:									
Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
227.637500	31.8	1000.0	120.000	100.0	V	90.0	17.2	8.2	40.0
362.710000	28.9	1000.0	120.000	100.0	V	0.0	22.2	18.1	47.0
510.028750	34.3	1000.0	120.000	100.0	V	0.0	25.1	12.7	47.0
943.012500	33.8	1000.0	120.000	100.0	V	0.0	29.0	13.2	47.0
Note:									
1. All Readings below 1GHz are performed with Quasi-Peak measurements as necessary.									
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).									
Remark	---								

Measurement data	<input checked="" type="checkbox"/>	Horizontal	<input type="checkbox"/>	Vertical																																																		
Operating mode / voltage / frequency used during the test		Mode 2																																																				
<p>Horizontal:</p> <div style="text-align: center;"> </div> <p>Final quasi-peak measurement results:</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Frequency (MHz)</th> <th>QuasiPeak (dB μ V/m)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Height (cm)</th> <th>Pol</th> <th>Azimuth (deg)</th> <th>Corr. (dB)</th> <th>Margin - QPK (dB)</th> <th>Limit - QPK (dB μ</th> </tr> </thead> <tbody> <tr> <td>30.848750</td> <td>28.5</td> <td>1000.0</td> <td>120.000</td> <td>100.0</td> <td>H</td> <td>0.0</td> <td>24.9</td> <td>11.5</td> <td>40.0</td> </tr> <tr> <td>88.321250</td> <td>27.9</td> <td>1000.0</td> <td>120.000</td> <td>150.0</td> <td>H</td> <td>0.0</td> <td>15.4</td> <td>12.1</td> <td>40.0</td> </tr> <tr> <td>551.738750</td> <td>31.4</td> <td>1000.0</td> <td>120.000</td> <td>150.0</td> <td>H</td> <td>90.0</td> <td>26.5</td> <td>15.6</td> <td>47.0</td> </tr> <tr> <td>963.261250</td> <td>33.9</td> <td>1000.0</td> <td>120.000</td> <td>150.0</td> <td>H</td> <td>90.0</td> <td>29.2</td> <td>13.1</td> <td>47.0</td> </tr> </tbody> </table> <p>Note:</p> <ol style="list-style-type: none"> 1. All Readings below 1GHz are performed with Quasi-Peak measurements as necessary. 2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). 					Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ	30.848750	28.5	1000.0	120.000	100.0	H	0.0	24.9	11.5	40.0	88.321250	27.9	1000.0	120.000	150.0	H	0.0	15.4	12.1	40.0	551.738750	31.4	1000.0	120.000	150.0	H	90.0	26.5	15.6	47.0	963.261250	33.9	1000.0	120.000	150.0	H	90.0	29.2	13.1	47.0
Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ																																													
30.848750	28.5	1000.0	120.000	100.0	H	0.0	24.9	11.5	40.0																																													
88.321250	27.9	1000.0	120.000	150.0	H	0.0	15.4	12.1	40.0																																													
551.738750	31.4	1000.0	120.000	150.0	H	90.0	26.5	15.6	47.0																																													
963.261250	33.9	1000.0	120.000	150.0	H	90.0	29.2	13.1	47.0																																													

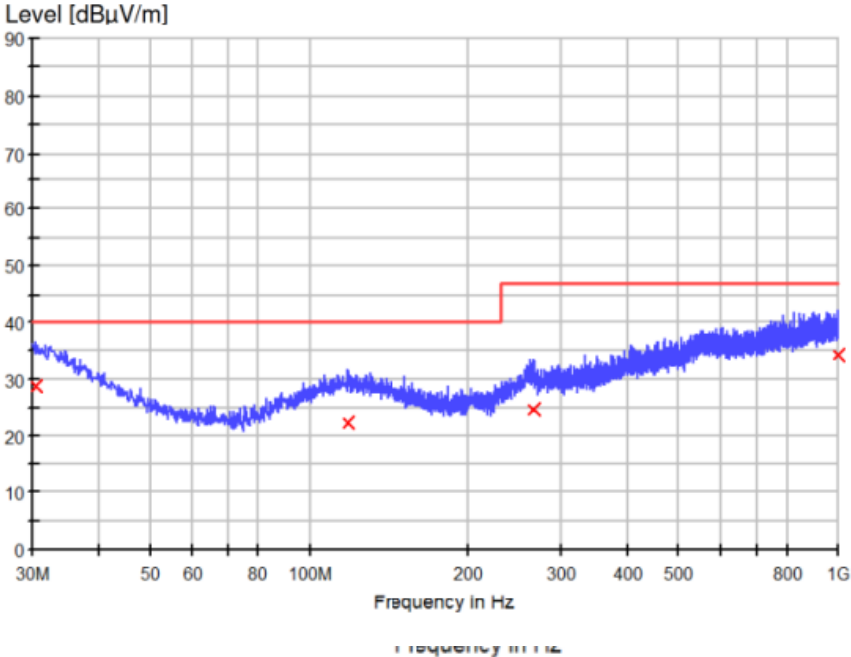Measurement data	<input type="checkbox"/>	Horizontal	<input checked="" type="checkbox"/>	Vertical					
Operating mode / voltage / frequency used during the test		Mode 2							
Vertical:									
									
Final quasi-peak measurement results:									
Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.363750	28.8	1000.0	120.000	100.0	V	90.0	25.2	11.2	40.0
118.027500	22.6	1000.0	120.000	100.0	V	90.0	19.3	17.4	40.0
266.801250	24.9	1000.0	120.000	100.0	V	0.0	21.0	22.1	47.0
999.515000	34.1	1000.0	120.000	100.0	V	90.0	29.7	12.9	47.0
Note: 1. All Readings below 1GHz are performed with Quasi-Peak measurements as necessary. 2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).									
Remark	---								

4.4	Discontinuous disturbance (clicks) on AC power leads	VERDICT:	N/A
-----	---	-----------------	------------

Standard	EN 55014-1		
Frequency [MHz]	Limit: QP [dB(μV)]	IF BW	Detector
0,15	66	9 KHz	Quasi-Peak (QP)
0,50	56	9 KHz	Quasi-Peak (QP)
1,40	56	9 KHz	Quasi-Peak (QP)
30,0	60	9 KHz	Quasi-Peak (QP)

Performed measurements

Voltage—Mains [V]	230 Vac		
Frequency—Mains [Hz]	50 Hz , 60 Hz		
Test method applied	<input checked="" type="checkbox"/>	Artificial mains network	
	<input type="checkbox"/>	Voltage probe	
Test setup	<input checked="" type="checkbox"/>	Table top	<input type="checkbox"/> Floor standing
	<input type="checkbox"/>	Other:	
	Refer to the Annex 3 for test setup photo(s).		
Operating mode(s) used	Mode 1		
Remark	---		

Reason for not performing the test	<input checked="" type="checkbox"/>	The amplitudes of the observed disturbances were all below the limit for continuous disturbance, these are not considered to be clicks.						
Measurement results	<input checked="" type="checkbox"/>	Neutral	<input checked="" type="checkbox"/>	Line 1	<input type="checkbox"/>	Line 2	<input type="checkbox"/>	Line 3
Frequency (MHz)	First Measurement: Determination of the limit L_q —Quasi-peak							
	Limit L (dBμV)	Number of short clicks	Number of long clicks	Number of clicks— N_1	Time of meas. (min.)	Click rate N	Increased limit (dB)	Increased Limit L_q
0,15	66	0	0	0	120	5	16	82
0,5	56	0	0	0	120	5	16	72
1,4	56	0	0	0	120	5	16	72
30	60	0	0	0	120	5	16	76
<input checked="" type="checkbox"/>	The calculated click rate N is not more than 5 times per minute and all the clicks are classified as short ($t \leq 10$ ms). Thus, the EUT is deemed to comply with the limits without any further measurement at an increased limit.							
Frequency (MHz)	Second measurement with Limit = L_q —(Upper quartile method):							
	Limit L_q (dBμV)	Number of clicks— N_2	Number of authorized clicks $N_2 \leq N_1/4$				Verdict	
0,15								
0,5								
1,4								
30								
Supplementary information: —								

4.5 Harmonic current emissions	VERDICT: N/A
---------------------------------------	---------------------

Standard	EN 61000-3-2	
Exclusions (For these categories of equipment, limits are not specified in the EN 61000-3-2 standard)	<input type="checkbox"/>	Arc welding equipment intended for professional use.
	<input type="checkbox"/>	System(s) with nominal voltage(s) less than 220 V _{AC} (line-to-neutral).
	<input type="checkbox"/>	Equipment with rated power of ≤ 75 W (other than lighting equipment).
	<input type="checkbox"/>	Professional equipment with total rated power > 1 kW.
	<input type="checkbox"/>	Symmetrically controlled heating elements with a rated power ≤ 200 W.
	<input type="checkbox"/>	Independent dimmers for incandescent lamps with rated power ≤ 1 kW.

Classification		
<input checked="" type="checkbox"/>	Class A	All apparatus not classified as Class B, C or D
<input type="checkbox"/>	Class B	Portable tools, arc welding equipment which is not professional equipment.
<input type="checkbox"/>	Class C	<input type="checkbox"/> Lighting equipment with active input power > 25 W
		<input type="checkbox"/> Lighting equipment with active input power ≤ 25 W (First requirement, Table 3 column 2)
		<input type="checkbox"/> Lighting equipment with active input power ≤ 25 W (Second requirement)
<input type="checkbox"/>	Class D	Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).

Performed measurements

Port under test	AC mains power input					
Voltage — Mains [V]	230 Vac					
Frequency — Mains [Hz]	50Hz					
Observation peroid	<input type="checkbox"/>	6.5 min.	<input checked="" type="checkbox"/>	2.5 min.	<input type="checkbox"/>	Other:
Version of measurement instrument standard used EN / IEC61000-4-7 (Cl. 7)	<input checked="" type="checkbox"/>	EN 61000-4-7:2002 + AM1:2009 (IEC 61000-4-7:2002+AM1:2008)				
	<input type="checkbox"/>	EN 61000-4-7:1991				
Control principle used in the EUT	<input checked="" type="checkbox"/>	Comply with the requirements of the Clause 6.1 (EN / IEC 61000-3-2).				
	<input type="checkbox"/>	Not comply with the requirements of the Clause 6.1 (EN / IEC 61000-3-2).				
Operating mode(s) used	Mode 1					
Remark	The EUT is regarded as an “Equipment with rated power of ≤ 75 W”. According to “Clause 7, Figure 1 – Flowchart for determining conformity” the EUT is deemed to comply with the requirements of the EN 61000-3-2 standard.					

4.6	Voltage changes, voltage fluctuations and flicker	VERDICT:	N/A
-----	--	-----------------	------------

Standard	EN 61000-3-3
----------	--------------

Limits

P _{ST} (Short term flicker)	<input checked="" type="checkbox"/>	≤ 1	<input type="checkbox"/>	Not Applicable
P _{LT} (Long term flicker)	<input checked="" type="checkbox"/>	≤ 0,65	<input type="checkbox"/>	Not Applicable
d _c (Relative Voltage change)	<input checked="" type="checkbox"/>	≤ 3,3%	<input type="checkbox"/>	Not Applicable
T _{MAX} (Maximum time duration)	<input checked="" type="checkbox"/>	500ms	<input type="checkbox"/>	Not Applicable
d _{MAX} (Max. voltage change)	<input checked="" type="checkbox"/>	≤ 4%	<input type="checkbox"/>	6%
	<input type="checkbox"/>	7%	<input type="checkbox"/>	Not Applicable
<u>Supplemental information:</u>				

Performed measurements

Reason for not performing the measurement(s)	<input type="checkbox"/>	Tests are not necessary because the EUT is unlikely to produce significant voltage fluctuations or flicker (clause 6.1).				
Port under test	AC Mains power input					
Voltage — Mains [V]	230 Vac					
Frequency — Mains [Hz]	50Hz					
Test method	<input checked="" type="checkbox"/>	Flickermeter according EN / IEC 61000-4-15:2011				
	<input type="checkbox"/>	Simulation (Clause 4.2.3 of EN / IEC 61000-3-3)				
	<input type="checkbox"/>	Analytical method (Clause 4.2.4 of EN / IEC 61000-3-3)				
	<input type="checkbox"/>	Use of $P_{st} = 1$ curve (Clause 4.2.5 of EN / IEC 61000-3-3)				
Observation peroid	<input checked="" type="checkbox"/>	10 min.	<input type="checkbox"/>	120 min.	<input type="checkbox"/>	Other:
	<input type="checkbox"/>	24 times switching according to Annex B				
Operating mode(s) used	Mode 4					
Remark	---					

5 IMMUNITY TEST RESULTS

5.1 Performance (Compliance) criteria

[According to EN 55014-2 (CISPR 14-2)]

Performance criteria A : The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and from what the user may reasonably expect from the apparatus if used as intended.

Performance criteria B : The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer when the apparatus is used as intended. During the test, degradation of performance is allowed however no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and from what the user may reasonable expect from the apparatus if used as intended.

Performance criteria C : Temporary loss of function is allowed provided the function is self- recoverable or can be restored by the operation of the controls or by any operation specified in the instruction for use.

5.1.1 Performance criteria related to immunity tests

Immunity test	Performance criteria
Electrostatic discharge	B
Radio-frequency electromagnetic fields	A
Fast transients	B
Surge transient	B
Injected currents (radio-frequency common mode)	A
Voltage dips and short interruptions	C

5.1.2 Manufacturer defined performance criteria

Not provided.

5.2 Monitored – Checked Functions / Parameters

During the immunity tests the following functions of the EUT has/have been monitored/checked.

<input type="checkbox"/>	Motor speed	<input type="checkbox"/>	Display data
<input type="checkbox"/>	Switching	<input type="checkbox"/>	Data storage
<input type="checkbox"/>	Standby mode	<input type="checkbox"/>	Sensor functions
<input type="checkbox"/>	Temperature	<input type="checkbox"/>	Audible signals
<input checked="" type="checkbox"/>	Power consumption	<input type="checkbox"/>	Others : LED's
<input type="checkbox"/>	AC mains input current	<input type="checkbox"/>	Others :
<input type="checkbox"/>	Timing	<input type="checkbox"/>	Others :
<input type="checkbox"/>	Illumination	<input type="checkbox"/>	Others :
<u>Supplementary information</u> : ---			

Immunity test	Monitored - Checked function(s)/parameter(s) during / after the test	Method
Electrostatic discharge	Power consumption	Visual
Radio-frequency electromagnetic fields	Power consumption	Visual / Camera
Fast transients	---	Visual
Surge transient	---	Visual
Injected currents (radio-frequency common mode)	---	Visual
Voltage dips and short interruptions	---	Visual
<u>Supplementary information</u> : ---		

5.3 Electrostatic discharge immunity	VERDICT: PASS
---	----------------------

Electrostatic discharges (ESD) are the result of persons or objects that accumulate static electricity due to for instance walking on synthetic carpets. The ESD can influence the operation of equipment or damage its electronics, either by a direct discharge or indirectly by coupling or radiation. Both effects are simulated during the tests.

Requirements

Standard	EN 55014-2							
Basic standard	EN 61000-4-2							
Port under test	Enclosure							
Air discharges ¹⁾	<input type="checkbox"/>	±2 kV	<input type="checkbox"/>	±4 kV	<input checked="" type="checkbox"/>	±8 kV	<input type="checkbox"/>	kV
Contact discharges ¹⁾	<input type="checkbox"/>	±2 kV	<input checked="" type="checkbox"/>	±4 kV	<input type="checkbox"/>	±8 kV	<input type="checkbox"/>	kV
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval.							
¹⁾ Tests with lower voltages are not required.								

Performed tests

Set-up	<input checked="" type="checkbox"/>	Table-top	<input type="checkbox"/>	Floor standing
Ambient temperature [°C]	20.7- 22.8°C		Relative Humidity air [%]	46.5-46.7%
Voltage – Mains [V]	---			
Frequency – Mains [Hz]	---			
Operating mode(s) used	Mode 1,2			

Test Point		Test Voltage [kV] & Polarity	Coupling type	# of applied discharges / polarity	Discharge interval [s]
<input checked="" type="checkbox"/>	Points on conductive surface.	±4	Contact	10	1
<input checked="" type="checkbox"/>	Points on non-conductive surface.	±8	Air	10	1
<input checked="" type="checkbox"/>	HCP top side.	±4	Contact	10	1
<input checked="" type="checkbox"/>	HCP bottom side.	±4	Contact	10	1
<input checked="" type="checkbox"/>	VCP right side.	±4	Contact	10	1
<input checked="" type="checkbox"/>	VCP left side.	±4	Contact	10	1
<input checked="" type="checkbox"/>	VCP front side.	±4	Contact	10	1
<input checked="" type="checkbox"/>	VCP rear side.	±4	Contact	10	1
Observation(s)		During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance or data was observed.			
Supplementary information: ---					

5.4 Radio-frequency electromagnetic fields immunity**VERDICT: PASS**

During the test it is verified if the equipment under test (EUT) has sufficient immunity against radiated electromagnetic fields. Industrial electromagnetic sources, walkie-talkies, radio transmitters, television transmitters and telecommunication equipment including cellular telephones and other emitting devices can generate these fields.

Requirements

Standard	EN 55014-2			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 – 1000 MHz	3 V/m	80% AM (1kHz)	≥ 0,5 s	≤ 1%
Supplementary information: ---				

Performed tests

Test method	<input checked="" type="checkbox"/>	EN 61000-4-3	<input type="checkbox"/>	EN 61000-4-20		
Test set-up	<input checked="" type="checkbox"/>	Equipment on the table (0,8 m height)				
(see Annex 3 for photo)	<input type="checkbox"/>	Equipment standing on floor (0,05 – 0,15 m height)				
Voltage – Mains [V]	---					
Frequency – Mains [Hz]	---					
Operating mode(s) used	Mode 1,2					
Frequency range (applied)	Antenna Polarization	Test level (applied)	Modulation (applied)	Dwell time (applied)	Remark	
80 – 1000 MHz (step size 1%)	H	3 V/m	80% AM (1kHz)	3 s	---	
	V	3 V/m	80% AM (1kHz)	3 s	---	
Exposed side of the EUT	<input checked="" type="checkbox"/>	Front (0°)	<input checked="" type="checkbox"/>	Right (90°)	<input checked="" type="checkbox"/>	Top
	<input checked="" type="checkbox"/>	Rear (180°)	<input checked="" type="checkbox"/>	Left (270°)	<input checked="" type="checkbox"/>	Bottom
Observation(s)	During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.					
<u>Supplementary information:</u> ---						

5.5	Electrical Fast Transients immunity	VERDICT:	N/A
------------	--	-----------------	------------

The EFT immunity test simulates disturbances by bursts of very short transients caused for example by switching off loads such as an AC motor or bouncing relay contacts. The transients are likely to disturb electronics but less likely to cause damage.

Requirements

Standard	EN 55014-2			
Basic standard	EN 61000-4-4			
Pulse characteristics	5/50 ns			
Port		Test level	Repetition frequency	Duration
<input checked="" type="checkbox"/>	AC input-output power ¹⁾	± 1000 V	5 KHz	1 min. / polarity
<input type="checkbox"/>	DC input-output power ²⁾	± 500 V	5 KHz	1 min. / polarity
<input type="checkbox"/>	Signal and Control lines ³⁾	± 500 V	5 KHz	1 min. / polarity
¹⁾ For extra low voltage a.c ports, this testing is only applicable to ports interfacing with cables whose total length may exceed 3 m according to the manufacturer's functional specification. ²⁾ Not applicable to battery operated appliances that cannot be connected to the mains while in use. ³⁾ Applicable only to ports interfacing with cables whose total length may exceed 3 m according to the manufacturer's functional specification.				

Performed tests

Voltage—Mains [V]	230 Vac		
Frequency—Mains [Hz]	50Hz		
Operating mode(s) used	Mode 1		
Test Set-up (see Annex 3 for photo)	<input type="checkbox"/>	Equipment standing on floor at (0,1 ± 0,01) m above ground plane	
	<input checked="" type="checkbox"/>	Equipment on the table (0,1 ± 0,01) m above ground plane	
	<input type="checkbox"/>	Artificial hand applied. Location refer to Annex 3.	
Coupling	<input checked="" type="checkbox"/>	Common mode	<input type="checkbox"/> Other:

Port(s) under test	Test Voltage &Polarity	Repetition Frequency	Test duration /polarity	Injection method			
AC power input	± 1 kV	5-KHz	60 s	<input checked="" type="checkbox"/>	CDN	<input type="checkbox"/>	Clamp
AC / DC power output	± 0.5 kV	5-KHz	60 s	<input type="checkbox"/>	CDN	<input type="checkbox"/>	Clamp
Ethernet / LAN		5-KHz	60 s	<input type="checkbox"/>	CDN	<input checked="" type="checkbox"/>	Clamp
Observation(s)	During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.						
Supplementary information: ---							

5.6	Surge transient immunity	VERDICT:	N/A
------------	---------------------------------	-----------------	------------

The surge transient immunity test simulates the surges that are caused by over-voltages due to indirect (induced) lightning transients. The pulse is a slow transient with high-energy contents and due to its long duration may cause damage to an unprotected EUT.

Requirements

Standard	EN 55014-2		
Basic standard	EN 61000-4-5		
Pulse characteristics	1,2/50µs Voltage; 8/20µs Current		
Repetition rate	≥ 60 secs. (for each test level and phase angle)		
Number of pulses	5 pulses (at each polarity and phase angle)		
Port	Test level & Polarity & Coupling		Phase angle [°]
	Line to Line	Line to Earth	
AC input power ¹⁾	+ 1 kV	+ 2 kV	90
AC input power ¹⁾	- 1 kV	- 2 kV	270
¹⁾ Tests with lower voltages are not required.			

Performed tests

Voltage — Mains [V]	230 Vac
Frequency — Mains [Hz]	50Hz
Operating mode(s) used	Mode 1
Repetition rate	60 secs. (for each test level and phase angle)
Number of pulses	5 pulses (at each polarity and phase angle)

Port(s) under test		Coupling	Test level & Polarity	Phase angle [°]	Remark
<input checked="" type="checkbox"/>	AC mains input power	Line to Neutral	+1 kV	90	---
<input checked="" type="checkbox"/>	AC mains input power	Line to Neutral	-1 kV	270	---
<input type="checkbox"/>	AC mains input power	Line to Earth	+2 kV	90	---
<input type="checkbox"/>	AC mains input power	Line to Earth	-2 kV	270	---
<input type="checkbox"/>	AC mains input power	Neutral to Earth	+2 kV	90	---
<input type="checkbox"/>	AC mains input power	Neutral to Earth	-2 kV	270	---
Observation(s)		During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.			
Supplementary information:---					

5.7	Injected currents (RF common mode) immunity	VERDICT:	N/A
------------	--	-----------------	------------

During this test the immunity of the equipment for induced or conducted electromagnetic fields is checked. Fields generated by radio and other transmitters cause RF voltages in long cables like the mains network. This test reproduces these induced disturbing voltages by injecting them to the EUT via the cabling.

Requirements

Standard		EN 55014-2		
Basic standard		EN 61000-4-6		
Frequency range		Modulation	Step size	Dwell time
<input type="checkbox"/>	0,15 – 80 MHz	80% AM (1kHz)	≤ 1%	≥ 0,5 s
<input checked="" type="checkbox"/>	0,15 – 230 MHz	80% AM (1kHz)	≤ 1%	≥ 0,5 s
Port			Test level, U ₀	
<input checked="" type="checkbox"/>	AC input-output power ¹⁾		3 V	
<input type="checkbox"/>	DC input-output power ^{2) 3)}		1 V	
<input type="checkbox"/>	Signal and Control lines ⁴⁾		1 V	
<div><div>1) For extra low voltage a.c ports, this testing is only applicable to ports interfacing with cables whose total length may exceed 3 m according to the manufacturer's functional specification.</div><div>2) Not applicable to battery operated appliances that cannot be connected to the mains while in use.</div><div>3) Applicable to battery operated appliances that can be connected to the mains while in use, or to appliances for which the length of d.c. cables may exceed 3 m according to the manufacturer's functional specification.</div><div>4) Applicable only to ports interfacing with cables whose total length may exceed 3 m according to the manufacturer's functional specification.</div></div>				

Performed tests

Frequency range (applied)				Modulation (applied)		Step-size (applied)			
<input type="checkbox"/>	0,15—80 MHz		<input checked="" type="checkbox"/>	0,15—230 MHz		80% AM (1kHz)		1%	
Voltage—Mains [V]				230 Vac		Frequency—Mains [Hz]		50Hz	
Operating mode(s) used				Mode 1					
Test set-up (see Annex 3 for photo)				<input checked="" type="checkbox"/>	Equipment standing on floor at (0,1 ± 0,01) m above ground plane.				
				<input type="checkbox"/>	Equipment on the table (0,1 ± 0,01) m above ground plane.				
				<input type="checkbox"/>	Artificial hand applied. Location refer to Annex 3.				

Port(s) under test	Test Level (applied)	Injection method	Dwell time (applied)	Remark
AC input power	3V	CDN-M2/3	3s	---
Ethernet / LAN	3V	RF-Injection Clamp	3s	---

Observation(s)	During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.
----------------	---

Supplementary information:	---
----------------------------	-----

5.8 Power supply interruptions and dips immunity**VERDICT: N/A**

The purpose of the test is to verify the immunity of the equipment against voltage dips and voltage interruptions. It helps to ensure that the equipment functions properly (as expected and safely) with power supply fluctuations. Voltage dips and interruptions are caused by faults in the LV, MV, HV networks (short-circuit or ground faults).

Requirements


Standard	EN 55014-2			
Basic standard	EN 61000-4-11			
# of dips & interruptions	3 dips / interruptions for each test level and phase angle			
Interval between events	≥ 10 seconds			
Port	Test level ¹⁾	Period (Cycles)		Performance Criterion
		50 Hz	60 Hz	
AC input power port	$U_{NOM} - 100\%$	0,5	0,5	C; Refer to the chapter 5.1 for details.
AC input power port	$U_{NOM} - 60\%$	10	12	C; Refer to the chapter 5.1 for details.
AC input power port	$U_{NOM} - 30\%$	25	30	C; Refer to the chapter 5.1 for details.
¹⁾ Changes to the voltage level shall occur at a zero crossing point in the a.c. voltage waveform. NOTE: Where the equipment has a rated voltage range the following shall apply: <ul style="list-style-type: none"> - If the voltage range does not exceed 20% of the lower voltage specified for the rated voltage range. A single voltage within that range may be selected for testing. - In all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range. 				

Performed tests

U _{NOM} [V _{AC}]	Terminal	Voltage dip [% U _{NOM}]	Duration [cycles]		Repetition rate [s]	Number of dips per test	Phase angle [°]
			50 Hz	60 Hz			
240	L-N	0	0,5	0,5	10	3	0, 180
240	L-N	40	10	12	10	3	0, 180
240	L-N	70	25	30	10	3	0, 180
Operating mode(s) used		Mode 1					
Observation(s)		During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.					
Supplementary information: ---							

6 IDENTIFICATION OF THE EQUIPMENT UNDER TEST

EUT PHOTOS

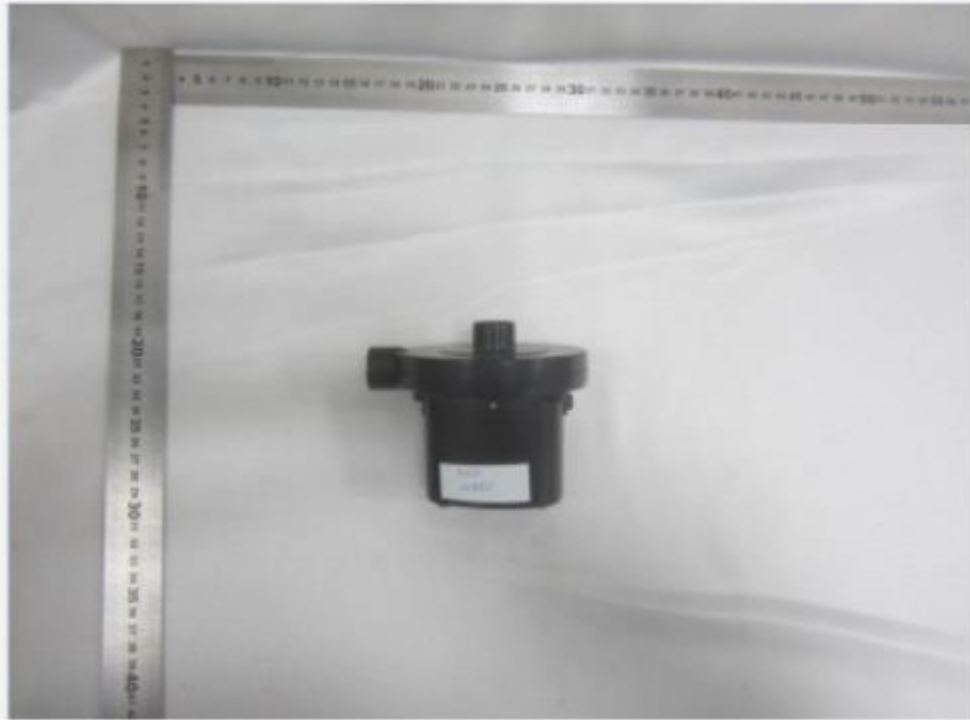

7 ANNEX 1 – MEASUREMENT UNCERTAINTIES

Expanded measurement : 5.49dB
 uncertainty ($k=2$)

8 ANNEX 2 – USED EQUIPMENT

No.	Equipment/software name	Model	Serial no./ software version	Cal. due date
1.	3m modified semi-anechoic chamber	SAC3	FJ129002	04.02.2019
2.	EMI test receiver	ESCI	100280	01.11.2019
3.	Bilog antenna	CBL 6112D	40530	13.02.2020
4.	EMC measurement software	EMC32	10.01.00	N/A
5.	Barometer	DYM3	08102717	03.04.2021
6.	ESD generator	NSG 435	5506	21.06.2019
7.	Fully Anechoic Chamber	FAC3plus	FJ139001	24.07.2019
8.	Signal Generator	SMR20	101393	02.11.2020
9.	Power Amplifier	80RF1000-30	1077138	01.11.2019
10.	Average Power Sensor	NRP6AN	101102	13.01.2019
11.	Average Power Sensor	NRP6AN	101103	13.01.2019
12.	Broadband Field Meter	NBM-520	C-0120	05.07.2019
13.	E-field Probe	EF1891	A-0387	05.07.2019
14.	EMS Antenna	HL 046	100039	N/A

9 ANNEX 3 – TEST PHOTOS

Radiated electromagnetic disturbances (30 MHz to 1000 MHz)



(working mode)




(Charging mode)

Electrostatic discharge immunity



Radiated EM Field Immunity

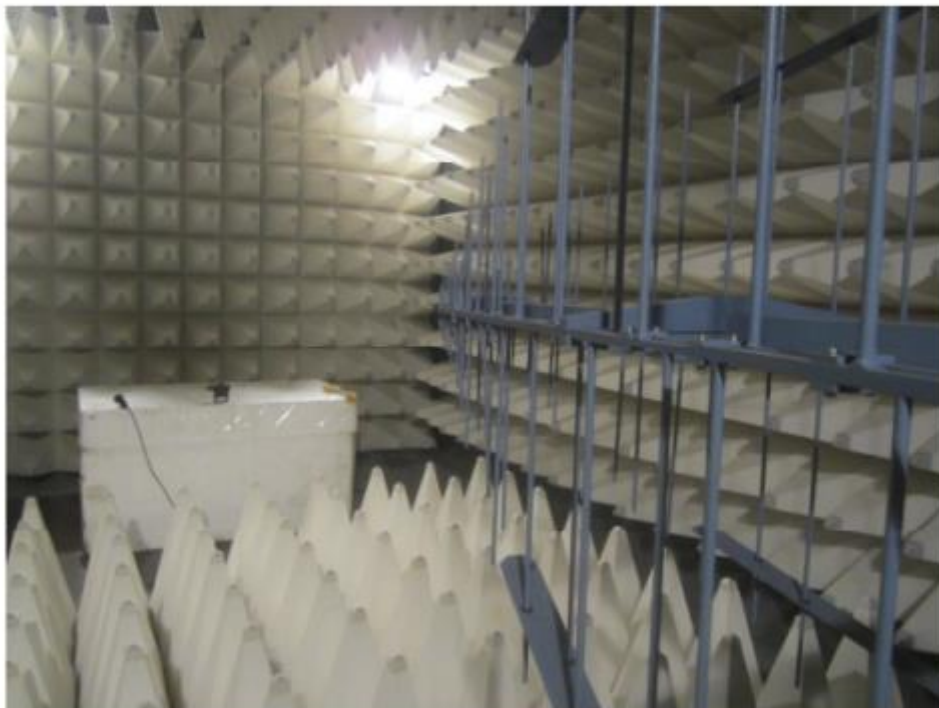

End of the report