


2.9kW 120V Single-Phase Basic PDU - 12 NEMA 5-15/20R Outlets, L5-30P Input, 10 ft. Cord, 36 in. 0U Rack-Mount

MODEL NUMBER: PDUV30-36

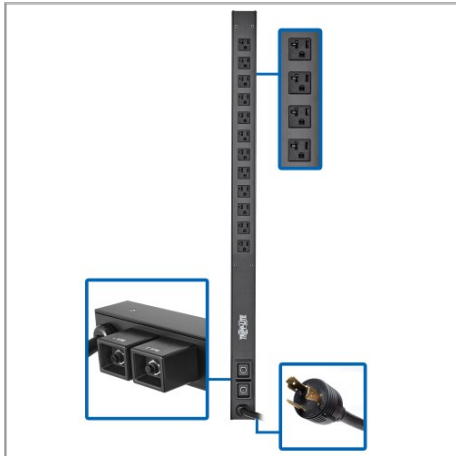

Delivers 120V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

Features

Single-Phase 120V PDU Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for data centers, computer rooms and network closets, the PDUV30-36 features two breakered load banks, each with six 5-15/20R outlets for connecting equipment. A 10-foot cord with NEMA L5-30P input plug connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads.

Up-to-Date Safety Features Protect Your Vital Equipment

The switchless design helps prevent an accidental shutdown, which could lead to costly downtime. Dual 20A circuit breakers protect connected components from dangerous overloads.

Versatile Installation Options Give You Plenty of Choices

The 36-inch 0U PDU mounts vertically in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting brackets with user-supplied hardware. You may also use the brackets to secure the PDU to the underside of a counter with the addition of two user-supplied screws. Bolt-down retention brackets keep power cords organized and your rack free of clutter.

Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 12 NEMA 5-15/20R outlets distribute AC power to connected equipment
- Switchless design helps prevent accidental shutdowns that can lead to costly downtime
- 10 ft. cord with NEMA L5-30P single-phase input connects to AC power source
- 36 in. 0U PDU with included mounting brackets installs in rack or under counter

Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

Package Includes

- PDUV30-36 2.9kW 120V Single-Phase Basic PDU
- (2) Plug retention brackets with installation hardware
- Rack-mounting hardware
- Owner's manual

Specifications

OVERVIEW	
UPC Code	037332255808
PDU Type	Basic
INPUT	
PDU Input Voltage	100; 120; 127



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Recommended Electrical Service	30A 120V
Maximum Input Amps	30
Maximum Input Amps Details	Agency de-rated to 24A continuous
PDU Plug Type	NEMA L5-30P
Input Phase	Single-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	3.05kW (127V), 2.88kW (120V), 2.4kW (100V) / 30A total capacity (Agency de-rated 24A); 20A max per breakered load bank; 16A max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(12) 5-15/20R
Output Nominal Voltage	100; 120; 127
Overload Protection	Two 20A breakers protect 6 outlets each
USER INTERFACE, ALERTS & CONTROLS	
Switches	n/a
PHYSICAL	
Form Factors Supported	0u vertical installation in equipment racks, plus under-counter and wallmount
Material of Construction	Aluminum
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	2.80 x 4.70 x 37.50
Shipping Weight (kg)	3.13
Unit Dimensions (hwd / cm)	91.44 x 5.7 x 9.5
Unit Dimensions (hwd / in.)	36 x 2.25 x 3.75
Unit Weight (kg)	3.63
Unit Weight (lbs.)	8
ENVIRONMENTAL	
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)
Relative Humidity	0-95% non-condensing
STANDARDS & COMPLIANCE	
Certifications	Tested to UL60950-1 (USA, Canada), NOM (Mexico)
Certification Details	Series Number (s) AGPD6673; Safety Standards (Canada) CAN/CSA-C22.2 No. 60950-1:2007 (2nd Ed) +A1:2011 +A2:2014; Safety Standards (U.S.) UL60950-1:2007 (2nd Ed)+A1 R10.14; NOM; RETIE



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>