




15.6" portable monitor with USB-C

The 15.6" ProLite X1670HC-B1 - equipped with IPS panel, delivers accurate and consistent colour reproduction with wide viewing angles. DisplayPort Alt Mode (DP Alt Mode) allows direct connection to a USB-C computer. This professional solution brings flexibility, comfort and mobility, all provided with a neoprene sleeve for safety on the move.



Portable solution

For anybody working remotely, with limited space and for those constantly on the move, an easily portable monitor provides the perfect solution without losing on performance. Simply connect the display to a USB-C equipped laptop, tablet or PC and increase your display size with comfort.



IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.

01 DISPLAY CHARACTERISTICS

Design	slim bezel
Diagonal	15.6", 39.5cm
Panel	IPS Panel Technology LED, matte finish
Native resolution	1920 x 1080 @60Hz (2.1 megapixel Full HD)
Aspect ratio	16:9
Brightness	220 cd/m ² typical
Static contrast	800:1 typical
Advanced contrast	80M:1
Response time (GTG)	6ms
Viewing zone	horizontal/vertical: 170°/170°, right/left: 85°/85°, up/down: 85°/85°
Colour support	16.7mIn (sRGB: 62%; NTSC: 45%)
Viewable area W x H	344.2 x 193.6mm, 13.6 x 7.6"
Pixel pitch	0.179mm
Colour	matte,

02 INTERFACES / CONNECTORS / CONTROLS

HDCP	yes
USB-C	x1
Micro USB	x1 (power delivery)

03 FEATURES

Blue light reducer	yes
OSD languages	EN, DE, FR, CN, RU, JP, NL, PL
Control buttons	Power, Menu, Scroll Up / ECO, Scroll Down / i-Style Colour, Exit
User controls	picture (contrast, brightness, sharpness, OD, ACR, ECO mode), colour (cool, normal, warm, user colour, i-Style colour, blue light reducer), language, OSD settings (OSD H. position, OSD V. position, OSD background, OSD timeout), setup menu (video mode adjust, opening logo, LED, information, memory recall)

04 MECHANICAL

Display position adjustments	tilt
Tilt angle	15° up; 35° down

05 ACCESSORIES INCLUDED

Cables	USB-C
Other	quick start guide, safety guide

06 POWER MANAGEMENT


Power usage	8W typical, 0.5W stand by, 0.3W off mode
-------------	--

07 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH
Other	REACH SVHC above 0.1%: Lead

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	377 x 234.5 x 20mm
Box dimensions W x H x D	430 x 290 x 93mm
Weight (without box)	0.96kg
Weight (with box)	1.5kg
EAN code	4948570118090

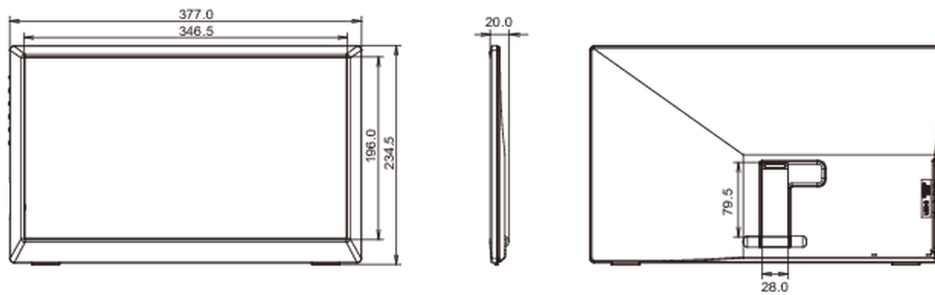

09 EU ENERGY EFFICIENCY LABEL

Manufacturer	iiyama
Visible screen diagonal	39.5cm; 15.6"; (16" segment)
Power in Standby	0.5W stand by
Resolution	1920 x 1080

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED