


OVERVIEW

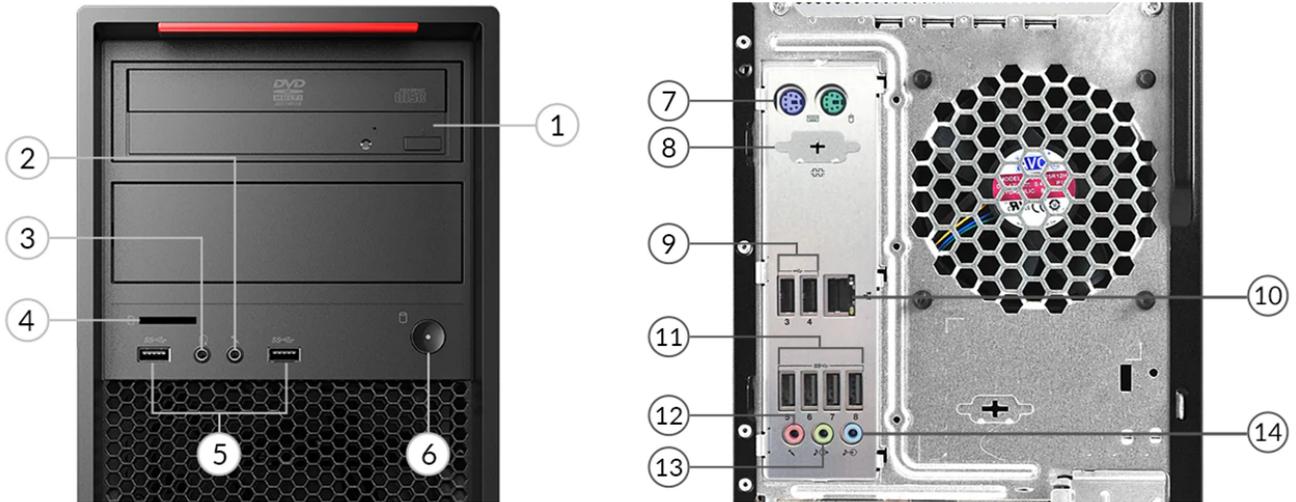

| | |
|-------------------------------------|------------------------|
| 1. Optical drive * | 8. Serial * |
| 2. Microphone (3.5mm) | 9. 2x USB 2.0 |
| 3. Headphone (3.5mm) | 10. Ethernet (RJ-45) |
| 4. Card reader | 11. 4x USB 3.1 Gen 1 |
| 5. 2x USB 3.1 Gen 1 | 12. Microphone (3.5mm) |
| 6. Power button | 13. Line-out (3.5mm) |
| 7. 2x PS/2 ports (keyboard / mouse) | 14. Line-in (3.5mm) |

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Up to one Intel® Xeon® W-2100 / W-2200 Processor

Processor

| Processor Name | Cores | Threads | Base Frequency | Max Frequency | Cache | Memory Support | Processor Graphics |
|----------------|-------|---------|----------------|---------------|---------|----------------|--------------------|
| Xeon W-2102 | 4 | 4 | 2.9GHz | - | 8.25MB | DDR4-2400 | - |
| Xeon W-2104 | 4 | 4 | 3.2GHz | - | 8.25MB | DDR4-2400 | - |
| Xeon W-2123 | 4 | 8 | 3.6GHz | 3.9GHz | 8.25MB | DDR4-2666 | - |
| Xeon W-2125 | 4 | 8 | 4.0GHz | 4.5GHz | 8.25MB | DDR4-2666 | - |
| Xeon W-2133 | 6 | 12 | 3.6GHz | 3.9GHz | 8.25MB | DDR4-2666 | - |
| Xeon W-2135 | 6 | 12 | 3.7GHz | 4.5GHz | 8.25MB | DDR4-2666 | - |
| Xeon W-2145 | 8 | 16 | 3.7GHz | 4.5GHz | 11MB | DDR4-2666 | - |
| Xeon W-2155 | 10 | 20 | 3.3GHz | 4.5GHz | 13.75MB | DDR4-2666 | - |
| Xeon W-2175 | 14 | 28 | 2.5GHz | 4.3GHz | 19MB | DDR4-2666 | - |
| Xeon W-2195 | 18 | 36 | 2.3GHz | 4.3GHz | 24.75MB | DDR4-2666 | - |
| Xeon W-2223 | 4 | 8 | 3.6GHz | 3.9GHz | 8.25MB | DDR4 2666 | - |
| Xeon W-2225 | 4 | 8 | 4.1GHz | 4.6GHz | 8.25MB | DDR4 2933 | - |
| Xeon W-2235 | 6 | 12 | 3.8GHz | 4.6GHz | 8.25MB | DDR4 2933 | - |
| Xeon W-2245 | 8 | 16 | 3.9GHz | 4.5GHz | 16.5MB | DDR4 2933 | - |

Processor Sockets

1x FCLGA2066

Operating System

Operating System

- Windows® 10 Pro 64 for Workstations
- Ubuntu Linux LTS
- No operating system

Graphics

Discrete Graphics Support

Supports up to one NVIDIA® Quadro® RTX 5000 or two NVIDIA Quadro P4000

Discrete Graphics Offering^[1]

| Graphics | Memory | Power | Connector | SLI / NVlink |
|-----------------|-------------|-------|---------------------------|--------------|
| Quadro P400 | 2GB GDDR5 | 30W | 3x miniDP 1.4 | None |
| Quadro P600 | 2GB GDDR5 | 45W | 4x miniDP | None |
| Quadro P620 | 2GB GDDR5 | 40W | 4x miniDP 1.4 | None |
| Quadro P1000 | 4GB GDDR5 | 50W | 4x miniDP 1.4 | None |
| Quadro P2000 | 5GB GDDR5 | 75W | 4x DP | None |
| Quadro P2200 | 5GB GDDR5 | 75W | 4x DP 1.4 | None |
| Quadro P4000 | 8GB GDDR5 | 120W | 4x DP 1.4 | None |
| Quadro P5000 | 16GB GDDR5X | 180W | 1x DVI-D DL, 4x DP 1.4 | None |
| NVIDIA T400 | 2GB GDDR6 | 40W | 3x miniDP 1.4 | None |
| NVIDIA T600 | 4GB GDDR6 | 40W | 4x miniDP 1.4 | None |
| NVIDIA T1000 | 4GB GDDR6 | 50W | 4x miniDP 1.4 | None |
| Quadro RTX 4000 | 8GB GDDR6 | 160W | 3x DP 1.4, 1x VirtualLink | None |

| | | | | |
|-----------------|------------|------|---------------------------|------|
| Quadro RTX 5000 | 16GB GDDR6 | 265W | 4x DP 1.4, 1x VirtualLink | None |
|-----------------|------------|------|---------------------------|------|

Notes:

1. NVIDIA Quadro RTX 5000 supports manufacture configure only, none standalone option is available

Monitor Support

Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

Intel C422 chipset

Memory

Max Memory^[1]

- Up to 256GB (4x 64GB RDIMMs) DDR4-2933
- Up to 128GB (4x 32GB DDR4-2666 RDIMMs)

Memory Type

- DDR4-2666 RDIMM ECC
- DDR4-2933 RDIMM ECC

Memory Slots

4 DDR4 DIMM slots, 4 channels capable

Memory Protection

ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to 4x 3.5" SATA HDD / 2.5" SATA HDD / 2.5" SATA SSD + 5x M.2 PCIe SSD

- 3.5" HDD up to 6TB each
- 2.5" SATA HDD up to 500GB each
- 2.5" SATA SSD up to 2TB each
- M.2 SSD up to 2TB each

Storage Type

| Disk Type | Interface | RPM | Offering |
|---------------|------------|------|---------------------------|
| 2.5" SAS HDD | SAS 12Gb/s | 10K | 300GB / 600GB |
| 2.5" SATA HDD | SATA 6Gb/s | 7.2K | 500GB / 500GB FIPS |
| 2.5" SATA SSD | SATA 6Gb/s | - | 256GB / 512GB / 1TB / 2TB |
| 3.5" SATA HDD | SATA 6Gb/s | 7.2K | 1TB / 2TB / 4TB / 6TB |
| M.2 PCIe SSD | PCIe NVMe | - | 256GB / 512GB / 1TB / 2TB |

Storage Controllers

| Storage Controller | Type | Interface | RAID | Cache |
|-----------------------------|----------|----------------------------|----------|-------|
| Onboard Intel RST SATA RAID | Standard | SATA 6.0Gb/s | 0/1/10/5 | None |
| 9440-8i PCIe | Optional | SAS 12.0Gb/s, SATA 6.0Gb/s | 0/1/10/5 | None |
| NVMe Basic | Optional | PCIe NVMe | 0/1/10 | None |
| NVMe for Intel SSD | Optional | PCIe NVMe | 0/1/10/5 | None |

Removable Storage

Optical Support

Up to two HH or 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- 15-in-1 card reader
- No card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio, Realtek® ALC662 codec

Power Supply**Power Supply**

| Power | Type | Efficiency | Key Features |
|-------|-------|------------|---|
| 500W | Fixed | 92% | Autosensing, 80 PLUS Platinum qualified |
| 625W | Fixed | 92% | Autosensing, 80 PLUS Platinum qualified |

DESIGN**Mechanical****Form Factor**

Tower (25L)

Dimensions (WxDxH)

175 x 426 x 376 mm (6.89 x 16.77 x 14.8 inches, with feet)

Weight

14.5 kg (31.96 lbs, maximum configuration)

Bays

- 2x 3.5" disk bay (standard)
- 2x 3.5" disk bay (optional, via flex bay)

Flex Bays

2x flex bays, supports the following:

- 2x half-height optical drives
- 2x 5.25" 9.0mm optical drives
- 1x 5.25" 9.0mm optical drive + 2x 3.5"/2.5" SATA SSD/HDD
- 1x 3.5"/2.5" SATA SSD/HDD with Front Access Storage Enclosure
- 1x flex module for the following options:

Tray 1: 9.0mm optical

Tray 2: 15-in-1 USB 3.1 Gen 1 reader, 2x Thunderbolt™, or 4-digit diagnostic display

Port 1 and 2: Front USB 3.1 Gen 1 Type-C or eSATA

- 2x M.2 SSD with 2x Front Removable Drive Enclosures

M.2 Slots

Up to 5x M.2 SSD:

- 2 via onboard slots
- 3 via Single M.2 to PCIe adapter

Expansion Slots

- One PCIe 3.0 x4
- One PCIe 3.0 x8
- Two PCIe 3.0 x16

Expansion Slots Offering

Slot 1: PCIe 3.0 x16, full height, full length, 75W, by CPU

Slot 2: PCIe 3.0 x8, full height, full length, 25W, open ended, by CPU

Slot 3: PCIe 3.0 x16, full height, full length, 75W, by CPU,

Slot 4: PCIe 3.0 x4, full height, half length, 25W, open ended, by PCH

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

Additional Ethernet options via PCIe adapter

WLAN + Bluetooth®

- Intel Dual-Band Wireless-AC 8265, 802.11ac Dual-Band 2x2 Wi-Fi® + Bluetooth 4.2
- No WLAN and Bluetooth

Ports^[1]

Front Ports

- 2x USB 3.1 Gen 1
- 1x headphone (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

- 1x eSATA (with flex module)
- 2x Thunderbolt (with flex module, USB-C form, one supports video-out)
- 1x USB-C 3.1 Gen 1 (with flex module)

Rear Ports^[2]

- 2x USB 2.0
- 4x USB 3.1 Gen 1
- 2x PS/2 ports (keyboard / mouse)
- 1x Ethernet (RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)
- 1x microphone (3.5mm)

Optional Rear Ports

- 2x USB-C 3.1 Gen 2 (via 2-port USB-C expansion card)
- 1x Thunderbolt
- 1x serial

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password

MANAGEABILITY

System Management

System Management

Intel vPro with Intel AMT 11.0

Diagnostic

Diagnostic

- Photo-audio transfer with Lenovo PC Diagnostics for Android™ and iOS
- ThinkStation® Diagnostics for Windows
- Front 4-digit diagnostic
- Lenovo UEFI Bootable Diagnostics
- None

SERVICE

Warranty

Base Warranty

3-year limited onsite service with 9x5 NBD (for most models)

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Silver
- ENERGY STAR® 8.0 (on model 30BX0095US)
- GREENGUARD®
- RoHS compliant

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

