



CorePro LEDcandle

CorePro lustre ND 2.8-25W E14 827 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data


General Information			
Cap base	E14 [E14]	Warm-up time to 60% light (nom.)	0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.41
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
	Sphere	T-Case maximum (nom.)	63 °C
Light Technical		Controls and Dimming	
Colour Code	827 [CCT of 2,700 K]	Dimmable	No
Luminous flux (nom.)	250 lm	Mechanical and Housing	
Colour designation	Warm white (WW)	Lamp Finish	Frosted
Correlated Colour Temperature (Nom)	2700 K	Bulb shape	P45 [P 45mm]
Luminous efficacy (rated) (nom.)	89.00 lm/W	Approval and Application	
Colour consistency	<6	Energy consumption kWh/1,000 hours	3 kWh
Colour rendering index (nom.)	80		453196
LLMF at end of nominal lifetime (nom.)	70 %	Product Data	
Operating and Electrical		Full product code	871951431244900
Input frequency	50 to 60 Hz	Order product name	CorePro lustre ND 2.8-25W E14 827 P45 FR
Power (Rated) (Nom)	2.8 W	EAN/UPC – product	8719514312449
Lamp current (nom.)	28 mA	Order code	31244900
Wattage equivalent	25 W		
Starting time (nom.)	0.5 s		

CorePro LEDcandle

SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929002967102

SAP net weight (piece)	0.020 kg
------------------------	----------


Dimensional drawing




Candle P45 2.8-25W 250lm 2700K E14 ND FR

Product	D	C
CorePro lustre ND 2.8-25W E14 827 P45 FR	35 mm	106 mm


Photometric data

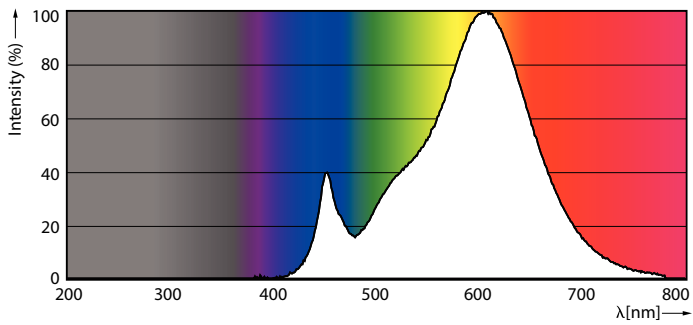

LEDlustre CorePro 2,8W P45 E27 827 FR-POC



LEDLustre Corepro P45 5W E27 827 FR-LDD




General Uniform Lightness 1000lm/1000lm


LEDlustre CorePro 2,8W P45 E14 827-GUL

CorePro LEDcandle

Lifetime

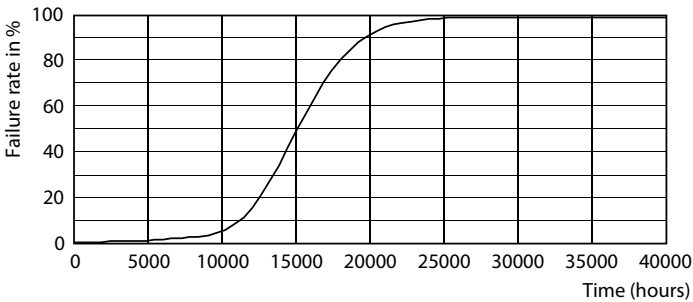

15K LED

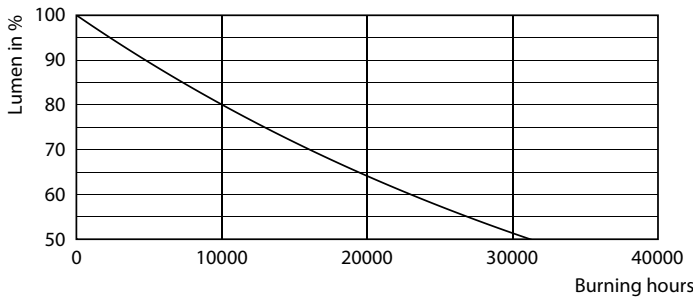

15K LMP

