


OVERVIEW

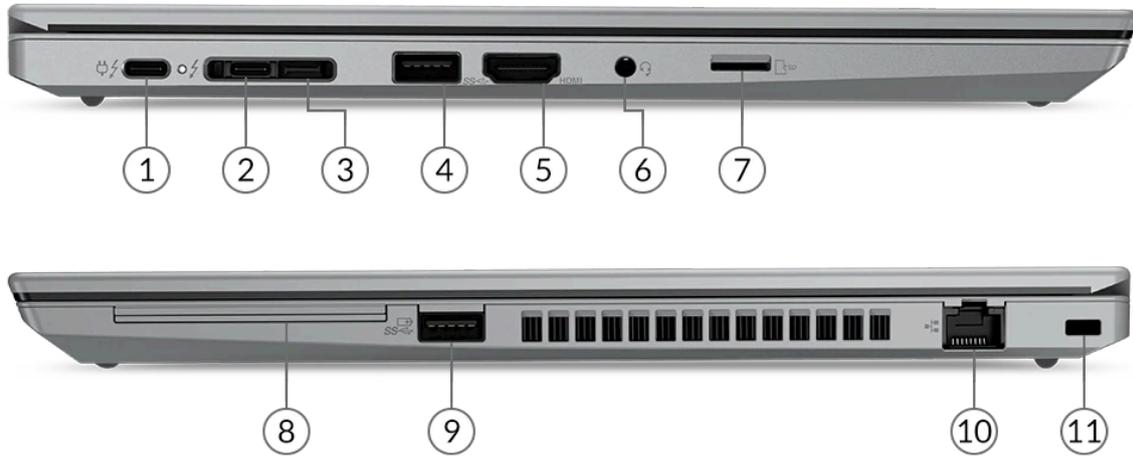

1. Thunderbolt 4	7. MicroSD card reader
2. Thunderbolt 4	8. Smart card reader *
3. Side docking connector *	9. USB 3.2 Gen 1 (Always On)
4. USB 3.2 Gen 1	10. Ethernet (RJ-45) *
5. HDMI 2.0	11. Kensington Security Slot
6. Headphone / microphone combo jack (3.5mm)	

Notes:

- Ports with * are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)
- The combination of 2 and 3 is side docking connector

PERFORMANCE

Processor

Processor Family

11th Generation Intel® Core™ i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 IoT Enterprise LTSC
- Linux
- Ubuntu Linux
- No operating system

Graphics

Graphics**^[1]

Graphics	Type	Memory	Key Features
Intel Iris Xe Graphics	Integrated	Shared	DirectX® 12
NVIDIA® GeForce® MX450	Discrete	2GB GDDR6	DirectX 12

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with Intel Core i5 or i7 processor and dual-channel memory. On the system with Intel Core i5 or i7 processor and single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.

Monitor Support

Monitor Support^[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt supports up to 5K@60Hz
- HDMI supports up to 4K@60Hz

Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory^[1]

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage**Storage Support**

One drive, up to 256GB M.2 2242 SSD or 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® Gen 3x4 slot, supports M.2 2242/2280 SSD

Storage Type^[1]**

Disk Type	Interface	Offering	Security
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	-	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	Opal2

Notes:

- The SSD with PCI 4.0x4 performance is downgraded to closer to PCIe 3.0x4 performance due to the system slot limitation.

Removable Storage**Optical**

None

Card Reader

MicroSD card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone^[1]

- Dual array microphone, far-field
- No microphone

Camera**

- 720p, with privacy shutter, fixed focus
- IR & 720p hybrid, with privacy shutter, fixed focus
- No camera

Notes:

- No microphone is for special bid only.

Battery**Battery**

Integrated Li-Polymer 50Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2018: 10.7 hr

JEITA 2.0: 14.5 hr

Notes:

- All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**[1]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. 45W USB-C AC adapter is only available for the models with integrated graphics.
No power adapter is for special bid only.
In EMEA only 65W USB-C AC adapter is available.

DESIGN

Display

Display**[2]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
14.0"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14.0"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14.0"	FHD (1920x1080)	None	IPS	400 nits	Anti-glare	16:9	800:1	72% NTSC	170°	Low power
14.0"	UHD (3840x2160)	None	IPS	500 nits	Anti-glare	16:9	1500:1	100% Adobe® RGB	178°	Dolby Vision™, DisplayHDR™ 400
14.0"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14.0"	FHD (1920x1080)	Multi-touch	IPS	500 nits	Anti-glare	16:9	1000:1	72% NTSC	178°	ThinkPad® Privacy Guard

Color Calibration

- X-Rite® Pantone® factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.
For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
2. 250 nits display is ONLY available in Brazil.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- No support

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical^[1]**Dimensions (WxDxH)**

Models	Dimensions
Aluminium models	329.4 x 227.5 x 17.9 mm (12.97 x 8.96 x 0.70 inches)
PPS models	329 x 227 x 17.9 mm (12.95 x 8.94 x 0.70 inches)

Weight

Models	Weight
FHD Low Power model with PPS top cover	1.47 kg (3.23 lbs)
FHD non-touch model with aluminium top cover	1.502 kg (3.31 lbs)
FHD non-touch model with PPS top cover	1.53 kg (3.37 lbs)
FHD Privacy Guard model with aluminium top cover	1.55 kg (3.42 lbs)
FHD Privacy Guard model with PPS top cover	1.58 kg (3.49 lbs)
FHD touch model with aluminium top cover	1.502 kg (3.31 lbs)
FHD touch model with PPS top cover	1.53 kg (3.37 lbs)
UHD model with PPS top cover	1.47 kg (3.24 lbs)

Case Color^{[2]}**

- Black
- Storm grey

Surface Treatment^[3]

- ISO 22196 compliant anti-microbial surface treatment (not including keyboard, display, and display bezel)
- Not anti-microbial surface treatment

Case Material^{}**

- Aluminium (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)
- PPS / 50% GF (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.
2. Storm grey case is NOT available in EMEA.
3. Anti-microbial surface treatment is NOT available for aluminium models.

CONNECTIVITY**Network****Onboard Ethernet^{**}**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), 1x RJ-45, supports Wake-on-LAN
- No Ethernet

WLAN + Bluetooth^{[1]}**

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

WWAN^{[2]}**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC^[3]

- Near Field Communication
- No support

ThinkPad T14 Gen 2 (Intel)

Notes:

1. Wi-Fi 6 and Wi-Fi 6E full features might be limited by country level restrictions.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
Bluetooth 5.2 is supported with driver version 22.30 and later.
2. WWAN is NOT available for aluminium models.
3. NFC is NOT available for aluminium models, and is mutually exclusive with FIPS 201 fingerprint reader and RFID reader.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4™ 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports^{***[2]}

- 1x Ethernet (RJ-45)
- 1x Side docking connector
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN model)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For the models without Ethernet connector, it is recommended to use the Lenovo USB-C to Ethernet Adapter for Ethernet connection.
Smart card reader is NOT available with FIPS 201 fingerprint reader and anti-microbial covers.

Docking

Docking

Various docking solutions supported via side docking connector (optional) or Thunderbolt.
For more compatible docking solutions, please visit [Docking for ThinkPad T14 Gen 2 \(Intel\)](#)

Monitor Cable

Monitor Cable^{***}

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip^{**}

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader^[1]**

- FIPS 201 fingerprint reader on palm rest
- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security^[2]

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- (Optional) RFID reader

Notes:

1. Match-on-chip fingerprint reader is mutually exclusive with RFID reader.
FIPS 201 fingerprint reader is ONLY available for the models with anti-microbial black covers and is mutually exclusive with NFC.
No fingerprint reader is ONLY available for the models with black cover.
2. RFID reader is ONLY available with FIPS 201 fingerprint reader and anti-microbial covers, and NOT available on Aluminium models.

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^[2]**

- 1-year depot service
- 1-year depot with 2-year system board service
- 1-year limited onsite service
- 1-year + 2-year depot service
- 1-year + 2-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>
2. No base warranty is for special bid only.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)

- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel