


OVERVIEW

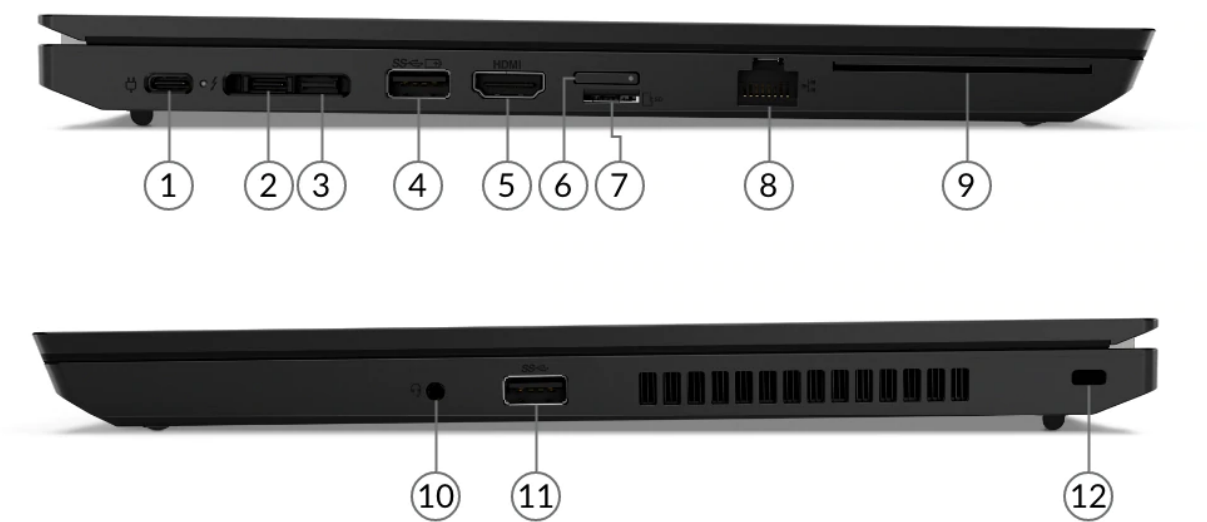

1. USB-C 3.2 Gen 1	7. MicroSD card reader
2. Thunderbolt 4	8. Ethernet (RJ-45) *
3. Side docking connector *	9. Smart card reader *
4. USB 3.2 Gen 1 (Always On)	10. Headphone / microphone combo jack (3.5mm)
5. HDMI 2.0	11. USB 3.2 Gen 1
6. Nano-SIM card slot *	12. Kensington Security Slot

- Notes:
- Ports with * are only available on selected models
 - The combination of 2 and 3 is side docking connector

PERFORMANCE

Processor

Processor Family

Intel® Celeron® or 11th Generation Intel Core™ i3 / i5 / i7 Processor

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron 6305	2	2	1.8GHz	-	4MB	DDR4-3200	Intel UHD Graphics
Core i3-1115G4	2	4	3.0GHz	4.1GHz	6MB	DDR4-3200	Intel UHD Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

Notes:

1. Intel Celeron processor is NOT available in EMEA

Operating System

Operating System**[1]

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 IoT Enterprise LTSC
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Windows 10 IoT Enterprise LTSC is for special bid only

Graphics

Graphics**[1]

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12
NVIDIA® GeForce® MX450	Discrete	2GB GDDR6	DirectX 12

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with Intel Core i5 or i7 processor and dual-channel memory. On the system with Intel Core i5 or i7 processor and single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics
NVIDIA GeForce MX450 is NOT available in EMEA

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI supports up to 4096x2160@60Hz
- USB-C supports up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200

Notes:

- 1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^{[1][2]}

- HDD/SSD mode: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
 - 2.5" HDD up to 2TB
 - M.2 2242 SSD up to 512GB
- One SSD mode: one drive, 1x M.2 SSD
 - M.2 2280 SSD up to 1TB
 - M.2 2242 SSD up to 512GB

Storage Slot^[3]

- HDD/SSD mode: one 2.5" drive slot + one M.2 slot
 - One 2.5" drive slot, supports 2.5" SATA HDD
 - One M.2 2242 PCIe® Gen 3x4 slot, supports M.2 2242 SSD
- One SSD mode: one M.2 slot
 - One M.2 2280 PCIe Gen 3x4 slot, supports M.2 2242/2280 SSD

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	APS (Active Protection System™)
2.5" SATA HDD	SATA 6Gb/s	7.2K	APS (Active Protection System)
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-

Notes:

- 1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
- 2. HDD/SSD mode is NOT available in EMEA
- 3. System has one HDD slot or one M.2 2280 slot exclusively for storage

Removable Storage

Optical

None

Card Reader

MicroSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™ Premium

Microphone^[1]

- Dual array microphone
- No microphone

Camera**[2]

- HD 720p, with privacy shutter, fixed focus
- IR & 720p hybrid, with privacy shutter, fixed focus
- No camera

Notes:

1. No microphone is for special bid only.
2. No camera is for special bid only.

Battery

Battery
Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]
MobileMark® 2018: 7.53 hr
JEITA 2.0: 11.255 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

- Power Adapter****[1][2]
- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - No power adapter

Notes:

1. AC adapter offerings depend on the country.
2. No power adapter is for special bid only
45W USB-C AC adapter and 65W USB-C slim AC adapter are NOT available in EMEA

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	HD (1366x768)	None	TN	220 nits	Anti-glare	16:9	400:1	45% NTSC	90°	-
15.6"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-

- Touchscreen**
- On-cell touch, supports 10-point touch
 - Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical^[1]

Dimensions (WxDxH)

366.5 x 250 x 21 mm (14.43 x 9.84 x 0.83 inches)

Weight

Starting at 1.98 kg (4.37 lbs)

Case Color

Black

Case Material

PC + ABS (top), PC + ABS (bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.

CONNECTIVITY

Network

Onboard Ethernet**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), 1x RJ-45, supports Wake-on-LAN
- No Ethernet

WLAN + Bluetooth®**^{[1][2]}

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- Realtek Wi-Fi 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- No WLAN and Bluetooth

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6 full features might be limited by country-level restrictions.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1

ThinkPad L15 Gen 2 (Intel)

- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0, and DisplayPort™ 1.4)
- 1x Thunderbolt 4 / USB 4 40Gbps (support data transfer, Power Delivery 3.0, and DisplayPort 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***[2]

- 1x Ethernet (RJ-45)
- 1x Side docking connector
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s
2. For the models without Ethernet connector, it is recommended to use the Lenovo USB-C to Ethernet Adapter for Ethernet connection.

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® L15 Gen 2 \(Intel\)](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password (for NVMe SSD)
- Hard disk password (for HDD)
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^{**[1]}

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified
- RoHS compliant

Other Certifications


Mil-Spec Test

MIL-STD-810H military test passed


- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel

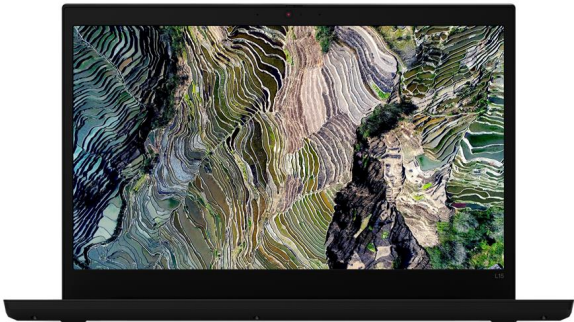

intel

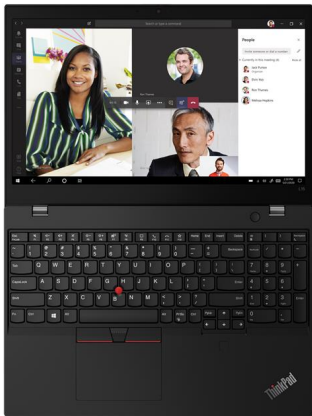

intel



intel



intel



intel