

4-Port Gigabit PoE+ Injector, Midspan Hub, 54V/30W - 802.3at/802.3af

Product ID


POEINJ4G-US

Top View



*Product may vary from image

Rear View

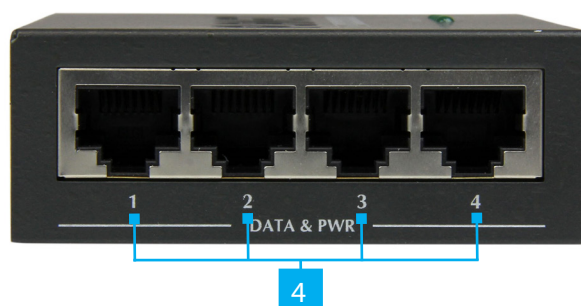

| | Feature | Function |
|---|-------------------------|--|
| 1 | Power Input Port | <ul style="list-style-type: none"> Connect the included Power Adapter |
| 2 | LEDs | <ul style="list-style-type: none"> Refer to LED Chart |
| 3 | Data Ports | <ul style="list-style-type: none"> Connect an Ethernet Cable to a Network Device Supports 1Gbps, 100Mbps, and 10Mbps |
| 4 | PoE+ Ports (Data + PoE) | <ul style="list-style-type: none"> Connect an Ethernet Cable to a PD (Powered Device) Supports 1Gbps, 100Mbps, and 10Mbps Supports 802.3af and 802.3at |

Package Contents

- PoE Injector x 1
- Power Adapter x 1
- Power Cord x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/POEINJ4G-US

- RJ45 terminated Cat5 or higher Ethernet cabling
- 10/100/1000Mbps compatible Ethernet network
- Available AC electrical outlet

LED Chart

| | LED | Indication |
|---|-------------|--|
| 1 | Power | <ul style="list-style-type: none"> Solid Green: Indicates that the POEINJ4G-US is receiving power |
| 2 | PoE In-Use* | <ul style="list-style-type: none"> Solid Green: Indicates that the corresponding port (1 ~ 4) has a PoE or PoE+ device connected |

***Note:** If the input Data line contains any PoE power, the PoE In-Use LED for that port may not light up

For additional self-service support options and community forums, please visit: www.StarTech.com/support

Installation

The **POEINJ4G-US** can be installed between a regular **Ethernet Switch** and **PoE Powered Devices**, and will provide power to the connected **PoE Powered Devices** without impacting regular data transmission performance.

1. Ensure there are no devices connected to the **PoE+ Ports (Data + PoE)** prior to connecting the **Power Adapter** to the **POEINJ4G-US**.
2. Connect the provided **Power Cord** to the provided **Power Adapter**, then to an **AC Electrical Outlet**. Then connect the **Power Adapter** to the **Power Input Port** on the **POEINJ4G-US**. Ensure that the **Power LED** is lit.
3. Using **RJ45 Ethernet Cable**, connect up to four source **Network Devices** (i.e. router, switch, computer, etc.) to the **Data Ports** on the **POEINJ4G-US**.
4. Using **RJ45 Ethernet Cable**, connect up to four PoE (802.3af 15W) or PoE+ (802.3at 30W) compliant device(s) to the **PoE+ Ports (Data + PoE)** on the **POEINJ4G-US**.

Notes

- The maximum RJ45 Ethernet Cable length used cannot exceed 100m / 330ft.
- If not connected to a IEEE 802.3af or IEEE 802.3at compliant device the POEINJ4G-US will not inject power into the connected Ethernet cable(s) or device(s).
- The POEINJ4G-US does not offer a “standby” operation mode. For energy savings, disconnect the Power Adapter from the POEINJ4G-US. Without removing the Power Adapter, the POEINJ4G-US can still consume power from your power source. It is strongly recommended you disconnect the Power Adapter if the POEINJ4G-US is not in use.

Wall-Mounting

The POEINJ4G-US features two mounting holes, located on the bottom side of the PoE Injector, see Figure 1. The mounting holes provide the option to wall-mount the POEINJ4G-US as desired.


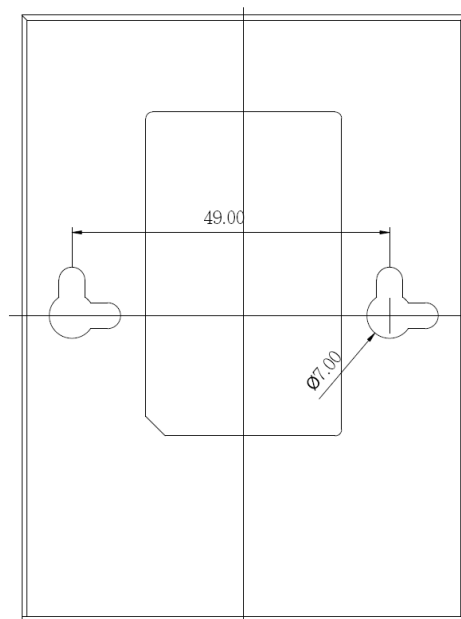


Figure 1 (Not to scale)



StarTech.com Ltd.
45 Artisans Crescent
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Road
Brackmills,
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hooftdorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp