

Inspiron 7580

Setup and Specifications



Notes, cautions, and warnings

 | **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 | **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 | **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

© 2018 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

1 Set up your Inspiron 7580.....	4
2 Create a USB recovery drive for Windows.....	6
3 Views of Inspiron 7580.....	7
Front.....	7
Right.....	7
Left.....	8
Base.....	9
Display.....	10
Bottom.....	10
4 Specifications of Inspiron 7580.....	12
Computer model.....	12
Dimensions and weight.....	12
Processors.....	12
Chipset.....	13
Operating system.....	13
Memory.....	13
Ports and connectors.....	14
Communications.....	14
EthernetWireless module.....	14
Audio.....	15
Storage.....	16
Intel Optane memory (optional).....	16
Media-card reader.....	16
Keyboard.....	16
Camera.....	17
Touchpad.....	17
Touchpad gestures.....	18
Power adapter.....	18
Battery.....	18
Display.....	19
Video.....	20
Computer environment.....	20
5 Keyboard shortcuts.....	22
6 Getting help and contacting Dell.....	24
Self-help resources.....	24
Contacting Dell.....	24

Set up your Inspiron 7580

- 1 Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

- 2 Finish operating system setup.

For Ubuntu:

Follow the instructions on the screen to finish setup.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

- 3 Locate and use Dell apps from the Windows Start menu—Recommended

Table 1. Locate Dell apps



SupportAssist

Proactively checks the health of your computer's hardware and software.

NOTE: Renew or upgrade your warranty by clicking the warranty expiry date in SupportAssist.



Dell Update

Updates your computer with critical fixes and important device drivers as they become available.



Dell Digital Delivery

Download software applications including software that is purchased but not pre-installed on your computer.

- 4 Create recovery drive for Windows.

 **NOTE: It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows.**

For more information, see [Create a USB recovery drive for Windows](#).

Create a USB recovery drive for Windows

Create a recovery drive to troubleshoot and fix problems that may occur with Windows. An empty USB flash drive with a minimum capacity of 16 GB is required to create the recovery drive.

NOTE: This process may take up to an hour to complete.


NOTE: The following steps may vary depending on the version of Windows installed. Refer to the [Microsoft support site](#) for latest instructions.

- 1 Connect the USB flash drive to your computer.
- 2 In Windows search, type *Recovery*.
- 3 In the search results, click **Create a recovery drive**.
The **User Account Control** window is displayed.
- 4 Click **Yes** to continue.
The **Recovery Drive** window is displayed.
- 5 Select **Back up system files to the recovery drive** and click **Next**.
- 6 Select the **USB flash drive** and click **Next**.
A message appears, indicating that all data in the USB flash drive will be deleted.
- 7 Click **Create**.
- 8 Click **Finish**.

For more information about reinstalling Windows using the USB recovery drive, see the *Troubleshooting* section of your product's *Service Manual* at www.dell.com/support/manuals.

Views of Inspiron 7580

Front

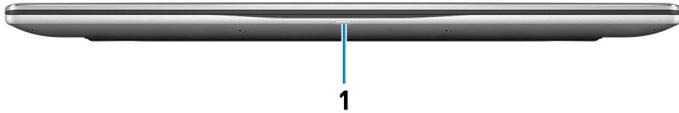

1 Power and battery-status light/hard-drive activity light

Indicates the battery-charge status or the hard-drive activity.

NOTE: Press **Fn+H** to toggle between the power and battery-status light, and hard-drive activity light.

Hard-drive activity light

Turns on when the computer reads from or writes to the hard drive.

Power and battery-status light

Indicates the power and battery-charge status.

Solid white — Power adapter is connected and the battery has more than 5% charge.

Amber — Computer is running on battery and the battery has less than 5% charge.

Off

- Power adapter is connected and the battery is fully charged.
- Computer is running on battery and the battery has more than 5% charge.
- Computer is in sleep state, hibernation, or turned off.

Right



1 Security-cable slot (for Noble locks)

Connect a security cable to prevent unauthorized movement of your computer.

2 Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

3 USB 3.1 Gen 1 port

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4 **SD-card slot**

Reads from and writes to the SD card.

Left



1 **Power-adapter port**

Connect a power adapter to provide power to your computer and charge the battery.

2 **USB 3.1 Gen 1 (Type-C) port/DisplayPort**

Connect peripherals such as external storage devices, printers, and external displays. Provides data transfer speeds up to 5 Gbps.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

3 **HDMI port**

Connect to a TV or another HDMI-in enabled device. Provides video and audio output.

4 **USB 3.1 Gen 1 port with PowerShare**

Connect peripherals such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

NOTE: If your computer is turned off or in hibernate state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

NOTE: Certain USB devices may not charge when the computer is turned off or in sleep state. In such cases, turn on the computer to charge the device.


5 **USB 3.1 Gen 1 port**

Connect peripherals such as storage devices and printers. Provides data transfer speeds up to 5 Gbps.

6 **Headset port**

Connect headphones or a headset (headphone and microphone combo).

Base

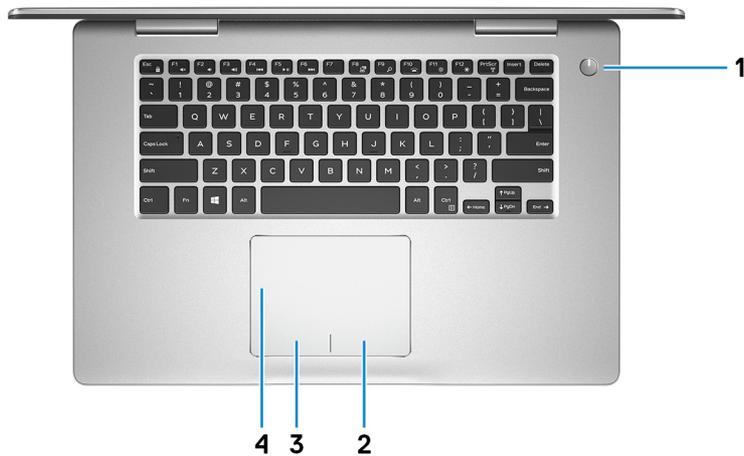

1 Power button

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

Press to put the computer in sleep state if it is turned on.

Press and hold for 4 seconds to force shut-down the computer.

i **NOTE:** You can customize the power-button behavior in Power Options. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

2 Right-click area

Press to right-click.


3 Left-click area

Press to left-click.

4 Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two finger tap to right-click.

Display

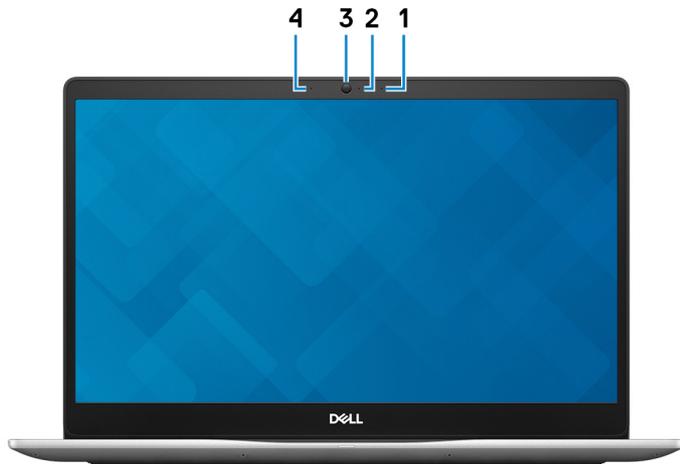

1 Right microphone

Provides digital sound input for audio recording and voice calls.

2 Camera-status light

Turns on when the camera is in use.

3 Camera

Enables you to video chat, capture photos, and record videos.

4 Left microphone

Provides digital sound input for audio recording and voice calls.

Bottom



1 Left speaker

Provides audio output.

2 **Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

3 **Right speaker**

Provides audio output.

Specifications of Inspiron 7580

Computer model

Inspiron 7580

Dimensions and weight

Table 2. Dimensions and weight

Height:

Front 18.81 mm (0.74 in.)

Rear 20.04 mm (0.79 in.)

Width 361.36 mm (14.23 in.)

Depth 244.5 mm (9.63 in.)

Weight (maximum) 2.16 kg (4.76 lb)

NOTE: The weight of your computer depends on the configuration ordered and the manufacturing variability.

Processors

Table 3. Processor specifications

Processor	8 th Generation Intel Core i5	8 th Generation Intel Core i7
Wattage	15 W	15 W
Core count	4	4
Thread count	8	8
Speed	Up to 3.9 GHz	Up to 4.6 GHz
L2 cache	256 KB x 4	256 KB x 4
L3 cache	6MB	8 MB
Integrated graphics	Intel UHD Graphics 620	Intel UHD Graphics 620

Chipset

Table 4. Chipset specifications

Chipset	Integrated into the processor
Processor	8 th Generation Intel Core i5/i7
DRAM bus width	Not supported
Flash EPROM	32 MB
PCIe bus	Up to PCIe Gen 3
External bus frequency	Up to 8 GT/s

Operating system

- Windows 10 Home (64-bit)
- Windows 10 Professional (64-bit)
- Ubuntu

Memory

Table 5. Memory specifications

Slots	Two SoDIMM slots
Type	Dual channel DDR4
Speed	2666 MHz
	NOTE: The 2666 MHz memory works at 2400 MHz for the 8 th generation Intel Core processors.
Maximum memory	32 GB
Minimum memory	4 GB
Memory per slot	4 GB, 8 GB, and 16 GB
Configurations supported	<ul style="list-style-type: none">• 4 GB DDR4 at 2400 MHz (1 x 4 GB)• 8 GB DDR4 at 2400 MHz (1 x 8 GB)• 8 GB DDR4 at 2400 MHz (2 x 4 GB)• 16 GB DDR4 at 2400 MHz (1 x 16 GB)• 16 GB DDR4 at 2400 MHz (2x 8 GB)• 32 GB DDR4 at 2400 MHz (1 x 32 GB)• 32 GB DDR4 at 2400 MHz (2 x 16 GB)

Ports and connectors

Table 6. Ports and connectors specifications

External:

Network	One RJ-45 port
USB	<ul style="list-style-type: none">• Two USB 3.1 Gen 1 ports• One USB 3.1 Gen 1 port with PowerShare• One USB 3.1 Gen 1 (Type-C) port/DisplayPort
Audio	One headset port
Video	One HDMI 2.0 port
Media-card reader	One SD-card slot
Micro subscriber identity module (uSIM) card	Not supported
Docking port	Not supported
Express card	Not supported
Power adapter port	One power-adapter port
Smart card reader	Not supported
Security	One security slot for Noble lock
Legacy ports	Not supported

Internal:

Expansion	Not supported
M.2	<ul style="list-style-type: none">• One M.2 slot for WiFi and Bluetooth combo card• One M.2 2280 slot for solid-state drive

Communications

Ethernet

Table 7. Ethernet specifications

Model number	Realtek RTL8111H Ethernet controller (integrated on system board)
Transfer rate	10/100/1000 Mbps

Wireless module

Table 8. Wireless module specifications

Model number	Intel 9260	Qualcomm QCA61x4A (DW1820)
Transfer rate	Up to 867 Mbps	Up to 867 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> · WiFi 802.11ac · WiFi 802.11a/b/g/n 	WiFi 802.11ac
Encryption	<ul style="list-style-type: none"> · 64-bit/128-bit WEP · AES-CCMP · TKIP 	<ul style="list-style-type: none"> · 64-bit/128-bit WEP · AES-CCMP · TKIP
Bluetooth	Bluetooth 5.0	Bluetooth 4.2

Audio

Table 9. Audio specifications

Type	Realtek High Definition Audio
Controller	Realtek ALC3254
Stereo conversion	Supported
Internal interface	Intel High-Definition Audio (HDA)
External interface	<ul style="list-style-type: none"> · 7.1 Channel output through HDMI · One headset port (headphone and microphone combo)
Speakers	Two
Internal speaker amplifier	Supported
External volume controls	Using media-control shortcut keys
Speaker output:	
Average	2 W
Peak	2.5 W
Subwoofer output	Not supported
Microphone	Digital-array microphone

Storage

Table 10. Storage specifications

Storage type	Interface type	Capacity
One 2.5-inch hard drive	SATA AHCI 6 Gbps	Up to 1 TB
One M.2 2280 solid-state drive	<ul style="list-style-type: none">• SATA AHCI 6 Gbps• PCIe NVMe up to 32 Gbps	Up to 512 GB

Intel Optane memory (optional)

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

NOTE: Intel Optane memory is supported on computers that meet the following requirements:

- 7th Generation or higher Intel Core i3/i5/i7 processor
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 15.9.1.1018 or higher

Table 11. Intel Optane memory specifications

Type	Storage accelerator
Interface	PCIe 3.0 x2
Connector	M.2 2230
Configurations supported	16 GB and 32 GB
Capacity	Up to 32 GB

Media-card reader

Table 12. Media-card reader specifications

Type	One SD card slot
Cards supported	<ul style="list-style-type: none">• Secure Digital (SD)• Secure Digital High Capacity (SDHC)• SD Extended Capacity (SDXC)

Keyboard

Table 13. Keyboard specifications

Type	Backlit keyboard
Layout	QWERTY

Number of keys	<ul style="list-style-type: none"> • United States and Canada: 80 keys • United Kingdom: 81 keys • Japan: 84 keys
Size	<ul style="list-style-type: none"> • X = 19.05 mm key pitch • Y = 18.05 mm key pitch
Shortcut keys	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in BIOS setup program.</p> <p>Keyboard shortcuts</p>

Camera

Table 14. Camera specifications

Number of cameras	One
Type	One HD fixed focus
Location	Front camera
Sensor type	CMOS
Resolution:	
Camera:	
Still image	0.92 megapixel (HD)
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	
Camera	78.6 degrees

Touchpad

Table 15. Touchpad specifications

Resolution:	
Horizontal	1229
Vertical	929
Dimensions:	

Horizontal	105 mm (4.13 in.)
Vertical	80 mm (3.15 in.)

Touchpad gestures

For more information about touchpad gestures for Windows 10, see the Microsoft knowledge base article [4027871](https://support.microsoft.com/4027871) at support.microsoft.com.

Power adapter

Table 16. Power adapter specifications

Type	45 W	65 W
Diameter (connector)	4.5 mm	4.5 mm
Input voltage	100 VAC-240 VAC	100 VAC-240 VAC
Input frequency	50 Hz-60 Hz	50 Hz-60 Hz
Input current (maximum)	1.30 A	1.50 A
Output current (continuous)	2.31 A	3.34 A
Rated output voltage	19.50 VDC	19.50 VDC
Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Battery

Table 17. Battery specifications

Type	3-cell "smart" lithium-ion (42 WHr)	4-cell "smart" lithium-ion (56 WHr)
Voltage	11.40 VDC	15.20 VDC
Weight (maximum)	0.2 kg (0.44 lb)	0.25 kg (0.55 lb)
Dimensions:		
Height	5.90 mm (0.23 in.)	5.90 mm (0.23 in.)
Width	191.85 mm (7.55 in.)	242.16 mm (9.53 in.)
Depth	103.25 mm (4.06 in.)	103.25 mm (4.06 in.)

Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 65°C (-40°F to 149°F)	-40°C to 65°C (-40°F to 149°F)
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	
Charging time (approximate)	4 hours (when the computer is off)	4 hours (when the computer is off)
	<p>i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manger application. For more information on the Dell Power Manger see, <i>Me and My Dell</i> on https://www.dell.com/</p>	<p>i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manger application. For more information on the Dell Power Manger see, <i>Me and My Dell</i> on https://www.dell.com/</p>
Life span (approximate)	300 discharge/charge cycles	300 discharge/charge cycles
Coin-cell battery	CR-2032	CR-2032

Display

Table 18. Display specifications

Type	Full HD
Panel technology	In-Plane Switching (IPS) panel
Luminance (typical)	<ul style="list-style-type: none"> • 220 nits • 300 nits
Dimensions (active area):	
Height	193.59 mm (7.62 in.)
Width	344.16 mm (13.16 in.)
Diagonal	396 mm (15.6 in.)
Native resolution	1920 x 1080
Megapixels	2.07
Pixels Per Inch (PPI)	141
Contrast ratio (minimum)	600:1
Response time (maximum)	35 msec rise/fall
Refresh rate	60 Hz

Horizontal view angle	+/- 85 degrees
Vertical view angle	+/- 85 degrees
Pixel pitch	0.179 mm
Power consumption (maximum)	<ul style="list-style-type: none"> · 4.2 W · 4.6 W
Anti-glare vs glossy finish	Anti-glare
Touch options	No

Video

Table 19. Discrete graphics specifications

Discrete graphics

Controller	External display support	Memory size	Memory type
Nvidia GeForce MX150	One USB 3.1 Gen 1 (Type-C) port/DisplayPort and one HDMI port	2 GB	GDDR5

Table 20. Integrated graphics specifications

The following table provides the detailed integrated graphics specifications of Inspiron 7580.

Controller	External display support	Memory size	Processor
Intel UHD Graphics 620	One USB 3.1 Gen 1 (Type-C) port/ DisplayPort and one HDMI port	Shared system memory	8 th Generation Intel Core i5/i7

Computer environment

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 21. Computer environment

	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G‡
Altitude (maximum)	0 m to 3,048 m (0 ft to 10,000 ft)	0 m to 10,668 m (0 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

‡ Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Table 22. List of keyboard shortcuts

Keys	Description
	Mute audio
	Decrease volume
	Increase volume
	Play previous track/chapter
	Play/Pause
	Play next track/chapter
	Switch to external display
	Search
	Toggle keyboard backlight
	Decrease brightness
	Increase brightness
	Turn off/on wireless
	Toggle scroll lock
	Toggle Fn-key lock
	Pause/Break
	Sleep
	System request
	Open application menu

Keys



Description

Toggle between battery-status light and hard-drive activity light



NOTE: Hard-drive activity light is supported only on computers shipped with a hard drive.

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 23. Self-help resources

Information about Dell products and services

www.dell.com

Dell Help & Support app



Tips



Contact Support

In Windows search, type `Contact Support`, and press Enter.

Online help for operating system

www.dell.com/support/windows

www.dell.com/support/linux

Troubleshooting information, user manuals, setup instructions, product specifications, technical help blogs, drivers, software updates, and so on.

www.dell.com/support

Dell knowledge base articles for a variety of computer concerns.

- 1 Go to www.dell.com/support.
- 2 Type the subject or keyword in the **Search** box.
- 3 Click **Search** to retrieve the related articles.

Learn and know the following information about your product:

See *Me and My Dell* at www.dell.com/support/manuals.

- Product specifications
- Operating system
- Setting up and using your product
- Data backup
- Troubleshooting and diagnostics
- Factory and system restore
- BIOS information

To locate the *Me and My Dell* relevant to your product, identify your product through one of the following:

- Select **Detect Product**.
- Locate your product through the drop-down menu under **View Products**.
- Enter the **Service Tag number** or **Product ID** in the search bar.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

NOTE: Availability varies by country and product, and some services may not be available in your country.

NOTE: If you do not have an active internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.