

Inspiron 5402

Setup and Specifications



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Inspiron 5402.....	4
Chapter 2: Views of Inspiron 5402.....	6
Right.....	6
Left.....	6
Base.....	7
Display.....	8
Bottom.....	9
Chapter 3: Specifications of Inspiron 5402.....	10
Dimensions and weight.....	10
Processor.....	10
Chipset.....	11
Operating system.....	11
Memory.....	11
External ports.....	12
Internal slots.....	12
Wireless module.....	12
Audio.....	13
Storage.....	13
Intel Optane Memory H10 with Solid State Storage (optional).....	14
Media-card reader.....	14
Keyboard.....	15
Camera.....	15
Touchpad.....	16
Power adapter.....	16
Battery.....	17
Display.....	17
Fingerprint reader (optional).....	18
GPU—Integrated.....	18
GPU—Discrete.....	19
Operating and storage environment.....	19
Chapter 4: Keyboard shortcuts.....	20
Chapter 5: Getting help and contacting Dell.....	23

Set up your Inspiron 5402

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [SLN151664](#) and [SLN151748](#) at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps






Resources	Description
	My Dell Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.

Table 1. Locate Dell apps (continued)

Resources	Description
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors and detects hardware failures. For more information, see SupportAssist for Home PCs User's Guide on www.dell.com/serviceabilitytools. To navigate to SupportAssist for Home PCs User's Guide, click SupportAssist and then, click SupportAssist for Home PCs User's Guide.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article SLN305843 at www.dell.com/support.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article 153764 at www.dell.com/support.</p>

Views of Inspiron 5402

Right



1. microSD-card slot

Reads from and writes to the microSD-card. The computer supports the following card types:

- microSecure Digital (mSD)
- microSecure Digital High Capacity (mSDHC)
- microSecure Digital Extended Capacity (mSDXC)

2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

3. Headset port

Connect headphones or a headset (headphone and microphone combo).

Left



1. Power-adaptor port

Connect a power adapter to provide power to your computer and charge the battery.

2. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

NOTE: On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in your computer's *Service Manual*.

3. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

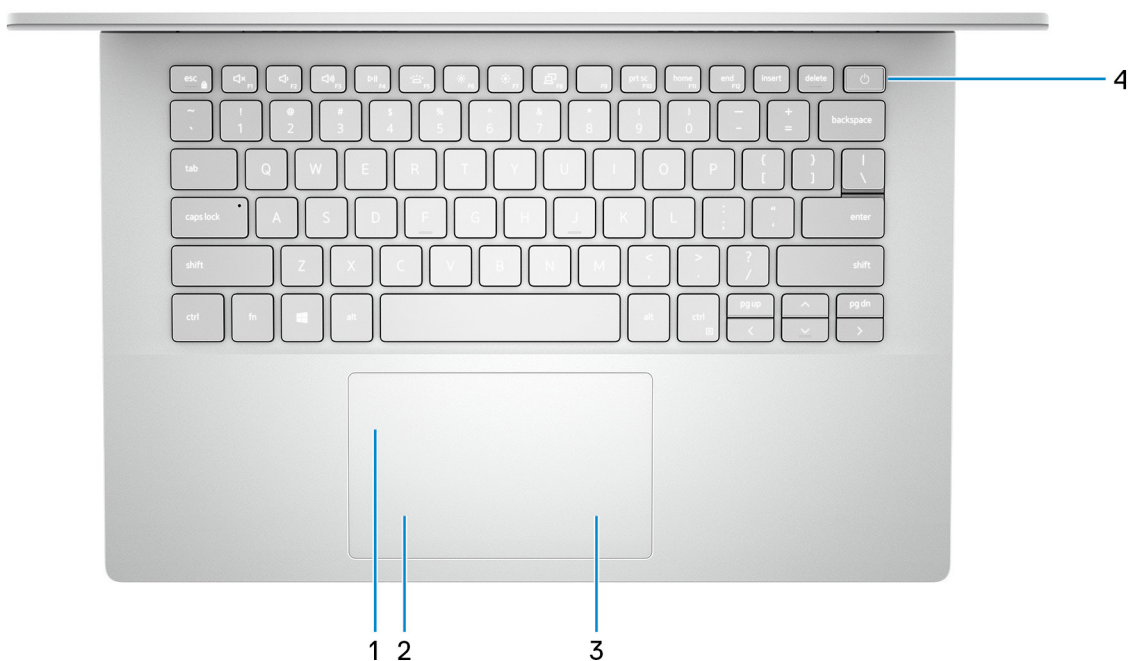
5. USB 3.2 Gen 2 (Type-C) port with Power Delivery/DisplayPort

Connect devices such as external storage devices, printers, and external displays.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 7.5 W power output that enables faster charging.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

Base



1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

2. Left-click area

Press to left-click.

3. Right-click area

Press to right-click.

4. Power button with optional fingerprint reader

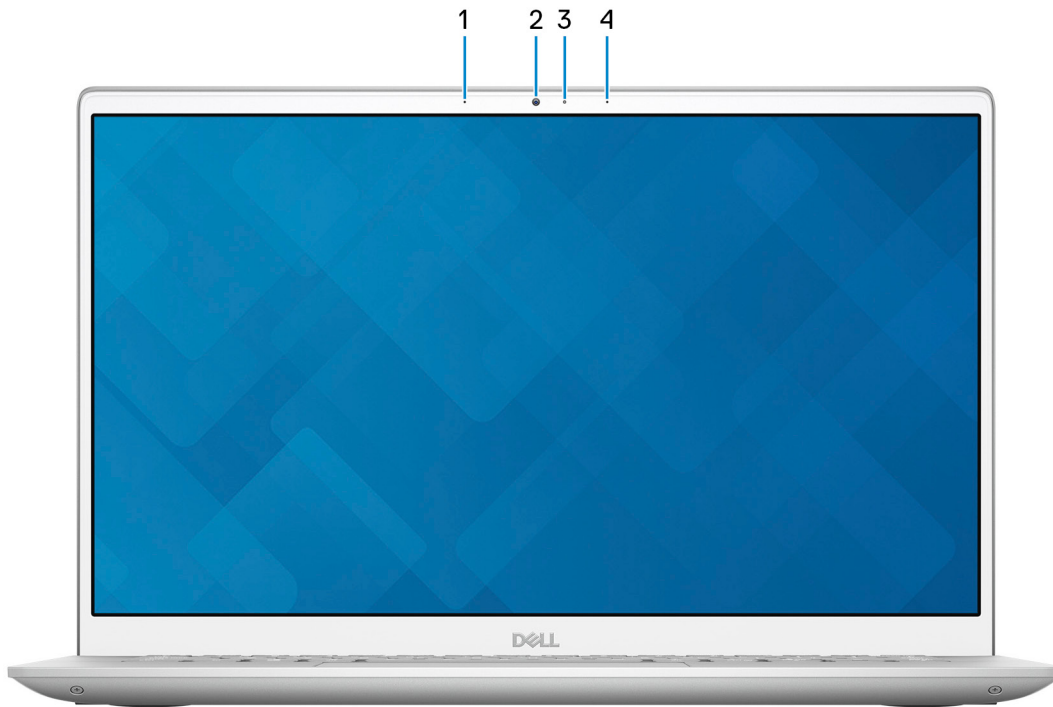
Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

Display



1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Camera

Enables you to video chat, capture photos, and record videos.

3. Camera-status light

Turns on when the camera is in use.

4. Right microphone

Provides digital sound input for audio recording and voice calls.

Bottom



1. Left speaker

Provides audio output.

2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

3. Right speaker

Provides audio output.

Specifications of Inspiron 5402

Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 5402.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	16.74 mm (0.66 in.)
Rear height	17.90 mm (0.70 in.)
Width	321.30 mm (12.65 in.)
Depth	216.20 mm (8.51 in.)
Weight (maximum)	1.40 kg (3.09 lb) <i>NOTE:</i> The weight of your computer depends on the configuration ordered and manufacturing variability.

Processor

The following table lists the details of the processors supported by your Inspiron 5402.

Table 3. Processor

Description	Option one	Option two	Option three
Processor type	11 th Generation Intel Core i3-115G4	11 th Generation Intel Core i5-1135G7	11 th Generation Intel Core i7-1165G7
Processor wattage	15 W	15 W	15 W
Processor core count	2	4	4
Processor thread count	4	8	8
Processor speed	Up to 4.10 GHz	Up to 4.20 GHz	Up to 4.70 GHz
Processor cache	6 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table lists the details of the chipset supported by your Inspiron 5402.

Table 4. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	11 th Generation Intel Core i3/i5/i7
DRAM bus width	64-bit
Flash EPROM	16 MB + 8 MB
PCIe bus	Up to Gen3

Operating system

Your Inspiron 5402 supports the following operating systems:

- Windows 10 Home, 64-bit
- Windows 10 Professional, 64-bit
- Windows 10 Home in S mode, 64-bit
- Ubuntu 18.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Inspiron 5402.

Table 5. Memory specifications

Description	Values
Memory slots	Two SODIMM slots
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB
Memory configurations supported	<ul style="list-style-type: none">• 4 GB, 1 x 4 GB, DDR4, 3200 MHz• 8 GB, 2 x 4 GB, DDR4, 3200 MHz• 8 GB, 1 x 8 GB, DDR4, 3200 MHz• 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 3200 MHz• 16 GB, 2 x 8 GB, DDR4, 3200 MHz• 16 GB, 1 x 16 GB, DDR4, 3200 MHz• 32 GB, 2 x 16 GB, DDR4, 3200 MHz

External ports

The following table lists the external ports on your Inspiron 5402.


Table 6. External ports

Description	Values
USB ports	<ul style="list-style-type: none">Two USB 3.2 Gen 1 portsOne USB 3.2 Gen 2 Type-C port with DisplayPort and PowerDelivery
Audio port	One headset (headphone and microphone combo) port
Video port/ports	One HDMI 1.4 port
Media-card reader	One microSD-card slot
Power-adaptor port	One 4.5 mm x 2.9 mm power-adaptor port
Security-cable slot	Not supported

Internal slots

The following table lists the internal slots of your Inspiron 5402.

Table 7. Internal slots

Description	Values
M.2	<ul style="list-style-type: none">One M.2 2230 slot for WiFi and Bluetooth combo cardOne slot for PCIe Gen3 x4 NVMe solid-state drive (M.2 2230 or M.2 2280)One slot for PCIe Gen3 x4 NVMe or SATA solid-state drive (M.2 2230 or M.2 2280) or Intel Optane Memory H10 with Solid State Storage <p> NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article SLN301626 at www.dell.com/support.</p>

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Inspiron 5402.

Table 8. Wireless module specifications

Description	Option one	Option two	Option three
Model number	Intel Wireless-AC 9462	Qualcomm QCA 61x4A	Intel AX201
Transfer rate	Up to 433 Mbps	Up to 867 Mbps	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none">WiFi 802.11a/b/gWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)	<ul style="list-style-type: none">WiFi 802.11a/b/gWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)	<ul style="list-style-type: none">WiFi 802.11a/b/gWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)

Table 8. Wireless module specifications (continued)

Description	Option one	Option two	Option three
			<ul style="list-style-type: none"> Wi-Fi 6 (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP
Bluetooth	Bluetooth 5.1	Bluetooth 5.0	Bluetooth 5.1

Audio

The following table lists the audio specifications of your Inspiron 5402.

Table 9. Audio specifications

Description	Values
Audio controller	Realtek ALC3204
Stereo conversion	Supported
Internal audio interface	High-Definition Audio (HDA)
External audio interface	Universal Audio Jack
Number of speakers	Two
Internal-speaker amplifier	Supported (audio codec integrated)
External volume controls	Keyboard shortcut controls
Speaker output:	
Average speaker output	2 W
Peak speaker output	2.5 W
Subwoofer output	Not supported
Microphone	Dual-array microphones in camera assembly

Storage

This section lists the storage options on your Inspiron 5402.

Your Inspiron 5402 supports the following storage configurations:

- M.2 slot one**

One PCIe Gen3 x4 NVMe solid-state drive (M.2 2230 or M.2 2280)

- M.2 slot two**

One PCIe Gen3 x4 NVMe or SATA solid-state drive (M.2 2230 or M.2 2280) or one Intel Optane Memory H10 with Solid State Storage

NOTE: If there is only one solid-state drive in the configuration you ordered, you can install another solid-state drive in the other M.2 slot. However, you may need a solid-state drive bracket (sold separately; please contact Dell support) to install the additional solid-state drive.

Table 10. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCIe Gen3 x4 NVMe	Up to 512 GB
M.2 2280 solid-state drive	PCIe Gen3 x4 NVMe	Up to 2 TB
M.2 2280 Intel Optane Memory H10 with Solid State Storage	PCIe Gen3 x4 NVMe	Up to 512 GB

Intel Optane Memory H10 with Solid State Storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H10 with Solid State Storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

Table 11. Intel Optane Memory H10 with Solid State Storage specifications

Description	Values
Interface	PCIe 3 x4 NVMe <ul style="list-style-type: none"> One PCIe 3 x2 for Optane memory One PCIe 3 x2 for solid-state storage
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

NOTE: Intel Optane Memory H10 with Solid State Storage is supported on computers that meet the following requirements:

- 9th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 15.9.1.1018 or higher

Media-card reader

The following table lists the media cards supported by your Inspiron 5402.


Table 12. Media-card reader specifications

Description	Values
Media-card type	One microSD-card slot
Media-cards supported	<ul style="list-style-type: none"> microSecure Digital (mSD) microSecure Digital High Capacity (mSDHC) microSecure Digital Extended Capacity (mSDXC)
NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Keyboard

The following table lists the keyboard specifications of your Inspiron 5402.

Table 13. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none">• Standard keyboard• Standard backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none">• United States and Canada: 81 keys• United Kingdom: 82 keys• Japan: 85 keys
Keyboard size	X=18.07 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p> NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p> <p>For more information, see keyboard shortcuts.Keyboard shortcuts</p>

Camera

The following table lists the camera specifications of your Inspiron 5402.

Table 14. Camera specifications

Description	Values
Number of cameras	One
Camera type	RGB HD camera
Camera location	Front
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	74.9 degrees

Touchpad

The following table lists the touchpad specifications of your Inspiron 5402.

Table 15. Touchpad specifications

Description		Values
Touchpad resolution:		
	Horizontal	3438
	Vertical	2170
Touchpad dimensions:		
	Horizontal	115 mm (4.53 in.)
	Vertical	70 mm (2.76 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows 10, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Inspiron 5402.

Table 16. Power adapter specifications

Description		Option one	Option two
Type		E45W	E65W
Connector dimensions:			
	External diameter	4.50 mm	4.50 mm
	Internal diameter	2.90 mm	2.90 mm
Input voltage		100 VAC–240 VAC	100 VAC–240 VAC
Input frequency		50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)		1.30 A	1.70 A
Output current (continuous)		2.31 A	3.34 A
Rated output voltage		19.50 VDC	19.50 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Inspiron 5402.

Table 17. Battery specifications

Description		Option one	Option two
Battery type		3-cell 40 Wh "smart" lithium-ion	4-cell 53 Wh "smart" lithium-ion
Battery voltage		11.40 VDC	15.20 VDC
Battery weight (maximum)		0.18 kg (0.40 lb)	0.24 kg (0.53 lb)
Battery dimensions:			
	Height	184.10 mm (7.25 in.)	239.10 mm (9.41 in.)
	Width	90.73 mm (3.57 in.)	90.73 mm (3.57 in.)
	Depth	5.75 mm (0.23 in.)	5.75 mm (0.23 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) i NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		Express charging: 2 hours (when the computer is off) Standard charging: 4 hours (when the computer is off) hours (when the computer is off)	Express charging: 2 hours (when the computer is off) Standard charging: 4 hours (when the computer is off) hours (when the computer is off)
Coin-cell battery		CR2032	CR2032

Display

The following table lists the display specifications of your Inspiron 5402.

Table 18. Display specifications

Description		Option one	Option two
Display type		Full High Definition	Full High Definition
Display-panel technology		Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)
Display-panel dimensions (active area):			
	Height	173.99 mm (6.85 in.)	173.99 mm (6.85 in.)
	Width	309.35 mm (12.18 in.)	309.35 mm (12.18 in.)

Table 18. Display specifications (continued)

Description		Option one	Option two
	Diagonal	355.60 mm (14.00 in.)	355.60 mm (14.00 in.)
Display-panel native resolution		1920 x 1080	1920 x 1080
Luminance (typical)		220 nits	300 nits
Megapixels		2.07	2.07
Color gamut		45% (NTSC)	72% (NTSC)
Pixels Per Inch (PPI)		157	157
Contrast ratio (min.)		500:1	500:1
Response time (max.)		35 ms	35 ms
Refresh rate		60 Hz	60 Hz
Horizontal view angle		80 +/- degrees	80 +/- degrees
Vertical view angle		80 +/- degrees	80 +/- degrees
Pixel pitch		0.16 mm	0.16 mm
Power consumption (maximum)		3.50 W	4.50 W
Anti-glare vs glossy finish		Anti-Glare	Anti-Glare
Touch options		No	No

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Inspiron 5402.

Table 19. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	80 x 64

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Inspiron 5402.

Table 20. GPU—Integrated

Controller	Memory size	Processor
Intel UHD Graphics	Shared system memory	11 th Generation Intel Core i3
Intel Iris X ^e Graphics	Shared system memory	11 th Generation Intel Core i5/i7

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Inspiron 5402.

Table 21. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA GeForce MX330	2 GB	GDDR5
NVIDIA GeForce MX350	2 GB	GDDR5

Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 5402.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 22. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 23. List of keyboard shortcuts























Function key	Redefined key (for multimedia control)	Behavior
 F1	 +  F1	Mute audio
 F2	 +  F2	Decrease volume
 F3	 +  F3	Increase volume
 F4	 +  F4	Play/Pause
 F5	 +  F5	Toggle keyboard backlight (optional) NOTE: Non-backlight keyboards have F5 function key without the backlight icon and does not support toggle keyboard backlight function.
 F6	 +  F6	Decrease brightness

Table 23. List of keyboard shortcuts (continued)

Function key	Redefined key (for multimedia control)	Behavior
 F7	fn +  F7	Increase brightness
 F8	fn +  F8	Switch to external display
prt sc F10	fn + prt sc F10	Print screen
home F11	fn + home F11	Home
end F12	fn + end F12	End

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 24. List of keyboard shortcuts










Function key	Behavior
fn + B	Pause/Break
fn + S	Toggle scroll lock
fn + R	System request
fn + ctrl 	Open application menu
fn + esc 	Toggle fn-key lock
fn + insert	Turn on/off wireless connection
fn + 	Emoji

Table 24. List of keyboard shortcuts (continued)



Function key	Behavior
 + 	Turn on/off Ultra performance mode
 + 	Page up
 + 	Page down

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 25. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.