

**Robust and powerful Slim PC to support Intel® vPro Technology**

The Shuttle XPC slim Barebone DQ170 is a robust 1.3l Barebone PC for Intel® LGA 1151 desktop processors, codenamed "Skylake". It allows for three displays to be operated at the same time and offers Dual Intel LAN and COM ports. Its slim metal chassis comes with a VESA mount included, provides versatile connectivity and reliable operation in environments with ambient temperatures of up to 50 °C. Its Q170 chipset brings Intel® vPro support. This platform is targeted at professional applications such as Digital Signage, office and industry.

**Feature Highlights**

<b>Slim Design</b>	<ul style="list-style-type: none"> <li>• Slim 1.3 litre metal chassis, black</li> <li>• 190 x 165 x 43 mm (LWH)</li> <li>• Operating temperature: 0~50°C</li> <li>• Including VESA mount (75/100 mm)</li> </ul>
<b>Operating System</b>	<ul style="list-style-type: none"> <li>• An operating system is not included</li> <li>• Supports Windows 7/8.1/10, Linux - 64-bit only</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>• Supports LGA 1151 "Skylake" processors up to a max. TDP of 65 W</li> <li>• Supports Core i7 / i5 / i3, Pentium, Celeron</li> <li>• Heatpipe cooling system with two fans</li> </ul>
<b>Chipset</b>	<ul style="list-style-type: none"> <li>• Intel Q170 Chipset</li> <li>• Supports Intel vPro in combination with appropriate processors and software</li> <li>• Hardware TPM v2.0 chip onboard</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 2x 204-pin SO-DIMM slots</li> <li>• Supports DDR3L-1600 (1.35V), max. 2x16GB</li> </ul>
<b>Graphics</b>	<ul style="list-style-type: none"> <li>• Integrated Intel HD graphics, 4K support [4] (features depend on processor)</li> <li>• HDMI, 2x DisplayPort, optional VGA [5]</li> <li>• Supports three independent displays [3]</li> </ul>
<b>Storage Bays</b>	<ul style="list-style-type: none"> <li>• 1x 2.5" bay for SATA hard disk or SSD</li> <li>• Two Mini expansion slots: 1x M.2 2260 BM slot (PCIe x4, SATA) 1x Half-Size Mini-PCIe for optional WLAN [6]</li> </ul>
<b>Other Connectors</b>	<ul style="list-style-type: none"> <li>• SD card reader, 2x audio (line out, mic)</li> <li>• 4x USB 3.0, 4x USB 2.0, 2x USB 2.0 onboard</li> <li>• 2x Intel Gigabit LAN (RJ45), supports WOL</li> <li>• 2x COM port (RS232 + RS232/RS422/RS485)</li> <li>• Connector for external power button</li> <li>• "Always on" Jumper onboard</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• External 90 W fanless power adapter</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Digital Signage, POS, control device, etc.</li> </ul>

**XPC slim Barebone DQ170**



Images for illustration only. Processor, memory, storage and operating system not included.




## Shuttle XPC slim Barebone DQ170 – Front and Back Panel

### Front view



### Rear view

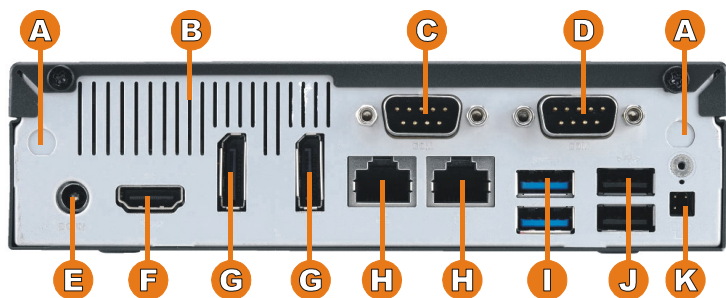

### Right side




### Left side




- 1 Microphone input
- 2 Headphone output
- 3 Power LED
- 4 Hard disk LED
- 5 Power Button
- 6 SD Card Reader
- 7 2x USB 3.0
- 8 2x USB 2.0

- A 2x WLAN perforation
- B Ventilation grille
- C COM 1 supports RS232 (or optional VGA port for analog displays [5])
- D COM 2 supports RS232/RS422/RS485
- E DC power input
- F HDMI video output
- G 2x DisplayPort (DP) video outputs
- H 2x RJ45 Gigabit LAN  
Note: only the LAN port supports the Intel vPro
- I 2x USB 3.0
- J 2x USB 2.0
- K Connector for external power button, Clear CMOS and 5V DC voltage (four pins, 2.54 mm pitch)
- L 2x hole for Kensington Lock
- M VESA mount (two parts)

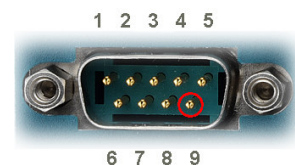

**COM port Pin 9 Configuration**  
 Pin 9 is a multi-functional signal. Based on jumper JP1 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with either 5V or 12V voltage level (each COM port separately).

Shuttle XPC slim Barebone DQ170 – Mainboard

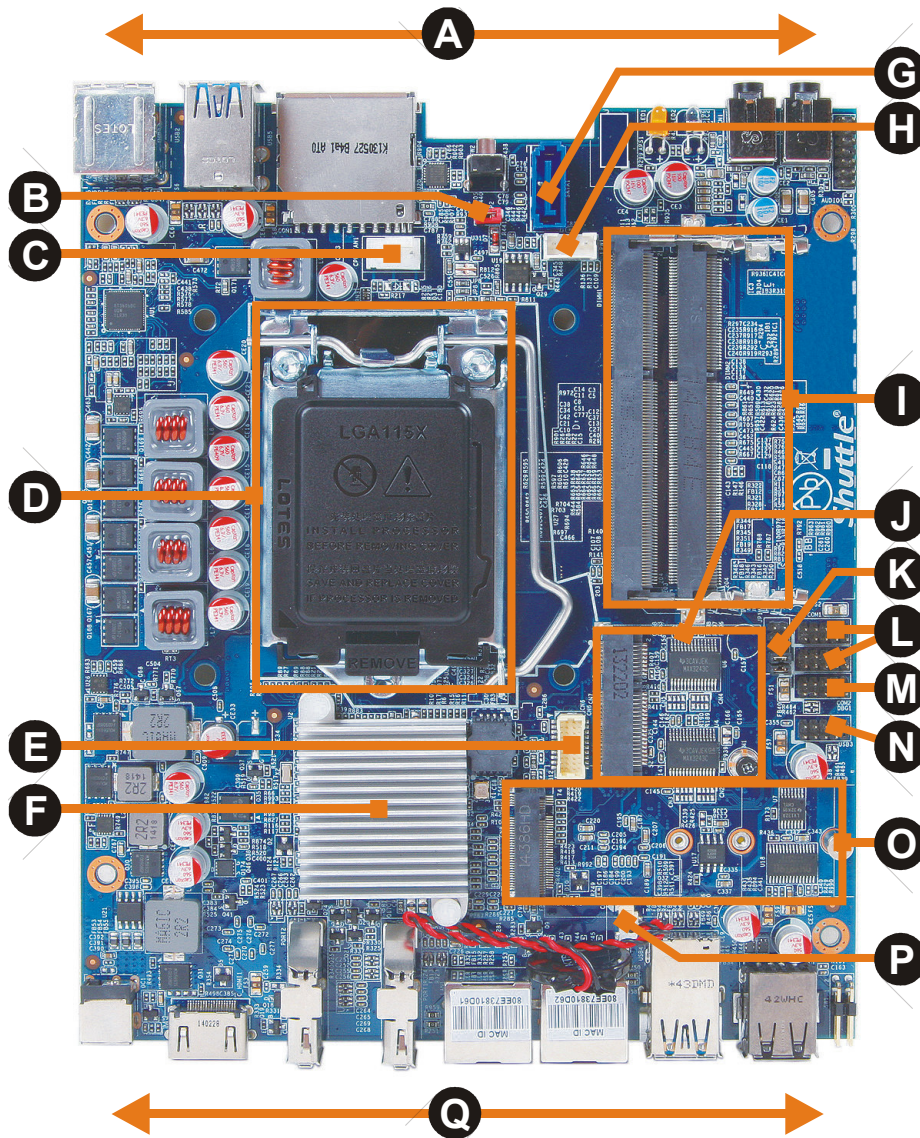

<b>A</b>	Front Panel
<b>B</b>	Always Power-On Jumper
<b>C</b>	Fan Connector
<b>D</b>	LGA 1151 Processor Socket
<b>E</b>	VGA Connector
<b>F</b>	Intel Q170 Chipset
<b>G</b>	SATA 3.0 (6 Gbps) Connector
<b>H</b>	SATA Power Connector
<b>I</b>	SO-DIMM Socket for DDR3L Memory

<b>J</b>	Mini-PCle Slot (Half-Size)
<b>K</b>	COM 1 / COM 2 Pin 9 Configuration
<b>L</b>	COM 1 / COM 2 Serial Ports
<b>M</b>	Debug Interface
<b>N</b>	USB 2.0 Header
<b>O</b>	M.2 2260 Slot
<b>P</b>	Battery Connector
<b>Q</b>	Back Panel

## Shuttle XPC slim Barebone DQ170 – Required Components


The following components need to be added to make it a fully-configured Mini PC

LGA 1151 “Skylake” processor  
TDP max. 65 W  
Core i7 / i5 / i3, Pentium  
or Celeron



2.5” SATA hard disk  
or Solid State Disk (SSD)  
(max. height: 12.7 mm)

Windows / Linux  
Operating System,  
64-bit only

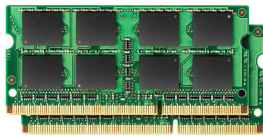

Up to two DDR3L-1600  
SO-DIMM memory modules  
max. 16 GB each


**Optional:**  
WLAN-Accessory  
WLN-S or WLN-P



**Optional:**  
M.2 2260/2242 SSD storage



**Optional: VGA port Accessory PVG01**  
Installing the PVG01 means one serial port  
(COM) less can be used at the backpanel.

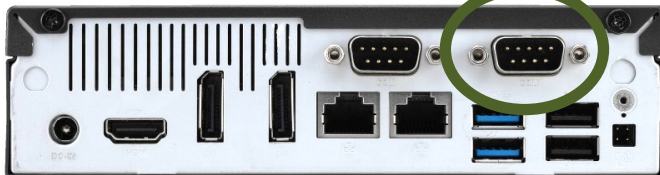

## Connectivity / Applications

The Shuttle XPC slim Barebone DQ170's wealth of ports makes it well-suited for a wide field of applications and external devices.



The DQ170 is your powerful 1.3-litre slim PC solution for particularly:


- Digital Signage operating up to three displays simultaneously
- In-store Audio/Video entertainment
- Gambling
- Home-Media
- Office
- Call Center
- Education
- Kiosk
- Point of Sales (POS)
- Medical
- Automation
- Small Server

## Shuttle XPC slim Barebone DQ170 – Product Features



### Robust, stylish and particularly small

You should have held it in your own hands to see how small it actually is. Barely measuring a volume of 1.35 litres, its steel chassis gives it the appropriate stability required for professional applications in digital signage. Despite its dimensions of 19 x 16.5 x 4.3 cm (LWH), the overall system performance is very high thanks to support of Intel Core desktop processors. The interior of the DQ170 is very tidy too so that it won't take long to set it up. Its sleek and stylish looks lets it easily find a place in both home and office environments.

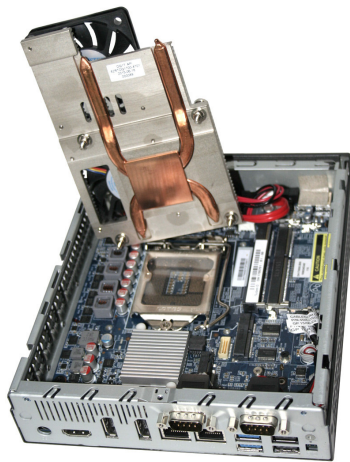

### Low noise thanks to heatpipe cooling system

An active dual-fan heatpipe cooling system ensures whisper-quiet operation and system stability.




### Extended temperature range and reliability

The DQ170 is outstandingly robust thanks to its rugged chassis. With an ambient temperature range from 0-50 °C it is suitable for use in most demanding environments. Solely designed with all solid capacitors, the DQ170 is guaranteed to deliver maximum stability, reliability and longer system lifetime for long-term applications like digital signage. **Caution:** for high ambient temperatures over 40 °C we strongly recommend to use SSDs (supporting at least 70 °C) and rugged SO-DIMM memory with a wide temperature tolerance (up to 95 °C).




### Triple Display with HDMI and 2x DisplayPort (optional VGA)

The DQ170 features three digital video outputs: HDMI and 2x DisplayPort. This multi-monitoring technology offers multiple display support on up to three separate monitors. This helps improve on productivity by allowing for spreading multiple windows across three monitors while working with them simultaneously. Furthermore, the DQ170 supports an optional D-Sub/VGA port.

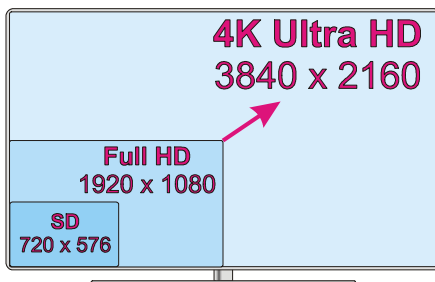

### Supports 4K Ultra HD at 60Hz

The DQ170 supports displays running at 4K (3840 x 2160 / 2160p) high resolution at 60 Hz frames per second when connected to its DisplayPort video outputs. Being the successor to the Full HD standard, Ultra HD delivers a four times higher resolution with a wider colour space and colour depth.

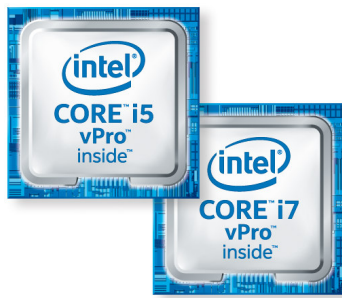

**Supports Intel vPro Technology**

Intel® vPro™ Technology allows IT organisations to remotely manage corporate PCs, even when they are powered off or with non-functional operating systems. It features Intel® Active Management Technology and offers a lighter-weight form of virtualisation to audit all Intel® AMT-based platforms in a networked environment. PCs with Intel® vPro™ Technology allow IT departments to remotely retrieve assets and hardware/software inventories, contain security threats, resolve system problems, and increase the uptime of desktops with lower maintenance costs.

Note: Intel vPro requires an Intel® Core™ vPro™ processor and appropriate software.




**Mini PCIe  
(Half Size)**

**Two Mini-Slots: Mini PCI-Express and M.2**

The **Half-Size Mini-PCI-Express slot** is intended for Wireless LAN adapter cards (e.g. the Shuttle Accessory WLN-S or WLN-P) as shown in the picture on the right.




The **M.2 slot (type 2260)** is fully-equipped with 4X PCI-Express v3.0 lanes, SATA 3.0 und USB 2.0 interfaces. Modern M.2 SSDs with PCI Express interface (PCIe) provide a significant higher bandwidth as compared to the usual SATA standard. Type 2260 means it supports the usual M.2 cards with a width of 22 mm and a length of 60 mm, but also 2230 and 2242 standard cards are supported.

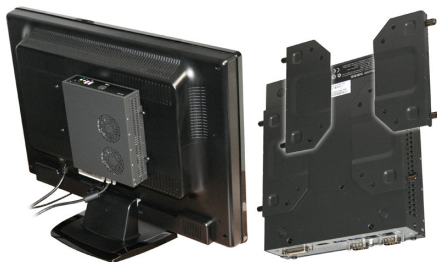

**VESA mount**

The supplied 75 / 100 mm VESA mount allows for installation on to walls or monitors which is particularly interesting for the industry segment, company buildings and public institutions. Other than this, the chassis bears numerous threaded holes (M3) enabling it to be fitted almost anywhere.

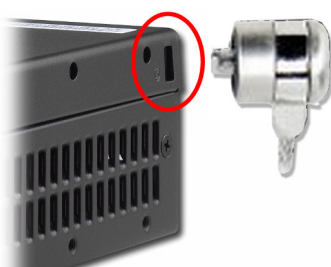

**Kensington Lock**

This is a small, metal-reinforced hole as part of an anti-theft system. The DQ170 provides an appropriate hole on both side of its chassis. The lock and cable are not included.




**External power button by separate remote line**

If because of space constraints (e.g. in case of fixed installation), the machine cannot be switched on by pressing the front power button, it can be powered on by a separate remote line. You will find an appropriate four-pin-connector at the back panel of the DQ170 (pitch 2.54 mm). Furthermore, this connector provides a Clear CMOS function and +5V DC voltage supply for external devices.

+5V voltage (2)  (4) Power Button  
 Clear CMOS (1)  (3) Ground

- Front Panel -

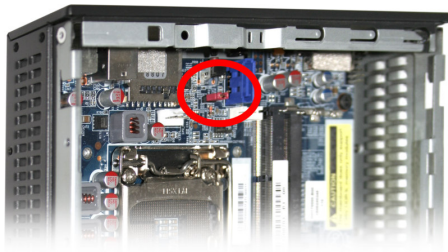







**Power on after Power fail**

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status (3) keep system turned off (4) Power-On by LAN or (5) Power-On by Real-Time-Clock. As a matter of the nature of this function, it may fail after short power failures. This is why the DQ170 also comes with a hardware-based solution. By removing Jumper JP2 (see image) the system will start unconditionally once power is applied.



Product Comparison

	DH110SE	DH110	DH170	DQ170
Availability	from Q3'16	from March'16	from Oct'15	from Sept'16
Chassis	1.35L, 19 x 16.5 x 4.3 cm			
Processor Support	Socket LGA1151, Skylake, TDP max. 65W			
Chipset	Intel H110	Intel H110	Intel H170	Intel Q170
Operation System Support	Windows 7, 8.1, 10 and Linux (64-bit only)			
TPM-Support	Firmware-TPM (optional)	Firmware-TPM (optional)	Firmware-TPM (opt.)	Hardware-TPM Chip
Multi-Display Support	2 Displays	2 Displays	3 Displays	
UHD Support	HDMI: 2160p/30 DisplayPort: 2160p/60			
Memory Support	2x SO-DIMM (260-pin) max. 2x 16 GB DDR4-2133	2x SO-DIMM (204-pin) max. 2x 16 GB DDR3L-1600		
Audio	Realtek ALC662			
Network	Single LAN Realtek RTL8111G	Dual LAN Intel i211 + Intel i219LM	Dual LAN Intel i211 + Intel i219LM	
Drive Bays	1x 2.5" / 12.5mm SATA			
Mini-Slots	1x M.2-2260 SATA 1x M.2-2230 supports WLAN	1x M.2-2260 SATA/PCIe 1x M.2-2230 supports WLAN	1x M.2-2260 SATA/PCIe 1x Mini-PCIe Half Size	
Front Panel	Power button, Power LED, HDD LED SD card reader, Head-phones, Microphone, 2x USB 3.0, 2x USB 2.0			
Back Panel	HDMI, DisplayPort 4x USB 2.0 1x Gigabit LAN (Realtek) 2x Kensington Lock 2x WLAN antenna (opt.) External power button (opt.)	HDMI, DisplayPort 2x USB 3.0 1x USB2.0/eSATA Combo 1x PS/2 Combo 2x Gigabit LAN (Intel) RS232 + RS232/422/485 2x Kensington Lock 2x WLAN antenna (opt.) External power button (opt.)	HDMI, 2x DisplayPort 2x USB 3.0, 2x USB 2.0 2x Gigabit LAN (Intel) RS232 + RS232/422/485 2x Kensington Lock 2x WLAN antenna (opt.) External power button (opt.)	
Accessories	-/-	VESA mount	VESA mount	
Optional Accessories	WLAN kit (WLN-M)	WLAN kit (WLN-M) D-Sub VGA port (PVG01)	WLAN kit (WLN-S, WLN-P) D-Sub VGA port (PVG01)	
Operation Temperature	max. 50 °C	max. 50 °C	max. 50 °C	
Power Adapter	90 W / 19 V	90 W / 19 V (also supports 84 W / 12 V power adapters)	90 W / 19 V	
Front View				
Rear View				

© 2016 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

## Shuttle XPC slim Barebone DQ170 - Specifications

<p><i>Chassis</i></p>	<p>Nettop PC with black chassis made of metal                  Dimensions: 190 x 165 x 43 mm (LWH) = 1.35-litre                  Weight: 1.3 kg net and 2.1 kg gross                  Two holes for Kensington Locks and numerous threaded holes (M3) on both sides of the chassis</p>
<p><i>Storage Bay</i></p>	<p>1x 6.35 cm / 2.5" storage bay supports one hard disk or SSD drive                  Device height: 12.5 mm (max.)</p>
<p><i>Operation System</i></p>	<p>This system comes without operating system.                  It is compatible with Windows 10, 8.1, 8, 7 and Linux – 64 bit only                  For Windows 7 Installation see notes here [11]</p>
<p><i>Mainboard Chipset BIOS</i></p>	<p>Chipset: Intel® Q170 Chipset                  (Intel® GL82Q170 PCH, code name "Sunrise Point")                  Platform Controller Hub (PCH) as Single-Chip-Solution                  AMI BIOS in 8 Mbit EEPROM with SPI interface                  All capacitors are high-quality solid capacitors                  Supports hardware monitoring and watch dog functionality                  Supports Unified Extensible Firmware Interface (UEFI)                  Supports power on after power failure [8]</p>
<p><i>Supports Intel® vPro™ and AMT</i></p>	<p>Intel® vPro™ is a brand name for a specific set of management and security technologies. Intel® Active Management Technology (AMT) is a subset of Intel vPro. This technology allows remote management of PCs, even in power-off mode or with non-functional operating systems. You can audit, repair and restore AMT-based platforms in a LAN. These functions can increase the uptime of desktops with lower maintenance costs.  <u>Note:</u> Intel vPro requires an Intel® Core™ vPro™ processor (e.g. Core i7-6700/T, Core i5-6600/T, Core i5-6500/T) and appropriate software.</p>
<p><i>TPM Module</i></p>	<p>Equipped with a Trusted Platform Module (TPM)                  TPM v2.0 chip: Nuvoton NPCT650AAAWX</p>
<p><i>Power Adapter</i></p>	<p>External 90 W power adapter (fanless)                  Input: 100~240 V AC, 50 / 60 Hz                  Output: 19 V DC, 4.74 A, max. 90 W                  DC Connector: 5.5 / 2.5mm (outer/inner diameter)</p>

© 2016 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Processor Support</i></p>	<p>Socket LGA 1151 (H4) supports the sixth generation of Intel Core i7 / i5 / i3, Pentium and Celeron processors                  Maximum supported processor power consumption (TDP) = 65 W                  Codename "Skylake", 14 nm process technology, up to 8 MB of L3 cache                  Not compatible with Intel Xeon E3 V5 processors for Socket LGA 1151 and processors for Socket LGA 1150. Does not support the unlock-function of Intel K-Series processors.                  The processor integrates PCI-Express, memory controller and the graphics engine on the same die (performance features depending on processor type)                  Please refer to the support list for detailed processor support information at <a href="http://global.shuttle.com">global.shuttle.com</a>.</p>
<p><i>Processor Cooling</i></p>	<p>Heatpipe processor cooling with two 60 mm fans on the upper side of the chassis</p>
<p><i>Memory Support</i></p>	<p>2x SO-DIMM slots with 204 pins                  Supports DDR3L-1333/1600 (PC3-10600/12800) SDRAM at 1.35V                  Supports maximum total size of 32 GB ( max. 16 GB per module)                  Supports Dual Channel mode                  Supports two unbuffered DIMM modules (no ECC)  <u>Notice:</u> This mainboard does only support 1.35V DDR3L memory modules. DDR3L has a lower operation voltage compared to DDR3.                  The maximum memory clock rate depends on the processor type.</p>
<p><i>Integrated Graphics</i></p>	<p>The features of the integrated graphics function depend on the processor type used.                  Three digital video outputs: 2x DisplayPort 1.2 and 1x HDMI 1.4                  - supports three independent Full HD displays simultaneously [3]                  - supports Full HD resolution at 1920 x 1200 (1080p/60Hz)                  - supports 4K UHD resolution at 3840 x 2160 (2160p/60Hz on DP, 30 Hz on HDMI) [4]                  - supports Blu-ray (BD) playback with HDCP                  - supports HD video plus multi-channel digital audio via a single cable.                  Optional analog D-Sub/VGA video output [5]</p>
<p><i>M.2 Slot</i></p>	<p>The M.2 2260 BM slot provides the following interfaces:                  - PCI-Express v3.0 X4                  - SATA v3.0 (6 Gbps)                  - USB 2.0                  It supports M.2 cards with a width of 22 mm and a length of 30, 42 or 60 mm (type 2230, 2242, 2260).                  Supports M.2 SATA SSDs, M.2 PCIe SSDs and other M.2 cards.</p>
<p><i>Mini PCIe Slot</i></p>	<p>Mini-PCIe Half-Size slot with PCIe 2.0 and USB 2.0 interface supports one optional Wireless Network (WLAN) card [6]</p>
<p><i>Audio</i></p>	<p>Audio Realtek® ALC 662 5.1 channel High-Definition Audio                  Two analog audio connectors (3.5 mm) at the front panel:                  1) 2-channel line out (headphones)                  2) microphone input                  Digital multi-channel audio output: by HDMI and DisplayPort</p>

© 2016 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Dual Gigabit LAN Controller</i></p>	<p>Dual network with two RJ45 ports                  Used network chips:                  1) Intel i211 Ethernet Controller with MAC, PHY and PCIe interface                  2) Intel i219LM PHY connected to the MAC of the processor                  Supports 10 / 100 / 1.000 MBit/s operation                  Supports WAKE ON LAN (WOL)                  Supports network boot by Preboot eXecution Environment (PXE)                  Supports Teaming mode [9]</p>
<p><i>Drive Connectors</i></p>	<p>1x Serial-ATA III, 6 Gb/s (600 MB/s) bandwidth                  With Serial-ATA power connector (onboard)</p>
<p><i>Card Reader</i></p>	<p>Integrated card reader                  Supports SD, SDHC and SDXC memory flash cards                  Supports boot-up from SD card</p>
<p><i>Front Panel Connectors</i></p>	<p>Microphone input                  Audio Line-out (headphone)                  2x USB 3.0                  2x USB 2.0                  SD card reader                  Power button                  Power LED (blue)                  HDD LED (yellow)</p>
<p><i>Back Panel Connectors</i></p>	<p>1x HDMI connector [1]                  2x DisplayPort connector (DP) [2]                  Optional 1x D-Sub VGA connector (Accessory PVG01 [5])                  2x USB 3.0                  2x USB 2.0                  2x Gigabit LAN (RJ45)                  2x RS232 serial port, 9-pin D-Sub (5/12V, 1x RS422/RS485) [10]                  DC-input connector for external power adapter                  4-pin connector (2.54 mm pitch) supports                  - external power on button                  - Clear CMOS function                  - +5V DC voltage for external components                  2x Perforation for optional Wireless LAN antennas                  2x hole for Kensington Locks</p>
<p><i>Other Onboard Connectors</i></p>	<p>1x jumper JP2 - power-on-after power fail (hardware solution) [8]                  1x analog VGA graphics output CN6 (2x 10-pin, 1 mm pitch) [5]                  2x USB 2.0 (2x5-pin)                  2x serial interface (COM) occupied by back panel connectors                  1x fan connector (4-pin) occupied by the cooling system                  1x connector for CMOS battery (occupied)                  1x audio connector (line-out/microphone, 2x 7-pin)</p>

© 2016 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

<p><i>Supplied Accessories</i></p>	<p>Multi-language user guide (EN, DE, FR, ES, JP, KR, SC, TC)                  VESA mount for 75 / 100 mm standard (two metal brackets)                  Four thumbscrews M3 x 5 mm (to affix VESA mount on the PC)                  Four screws M4 x 10 mm (to fix the VESA mount to the external device)                  Four screws M3 x 4 mm (to mount a 2.5" storage into the bay)                  Driver DVD (Windows 64-bit)                  Serial ATA cable for 2.5" drive including power cable                  External 90 W power adapter with power cord                  Protection cap for CPU socket (do not use if heatpipe or fan is mounted)                  Heatsink compound</p>
<p><i>Optional Accessory</i></p>	<p><b>(1) WLN-S or WLN-P:</b> Wireless LAN kit consisting of a Mini-PCle card, two antennas and appropriate antenna cables.  <b>(2) PVG01:</b> optional D-Sub VGA video output [5]</p>
<p><i>Environmental Specifications</i></p>	<p>Ambient temperature range: 0~50 °C [7]                  Relative humidity, non-condensing: 10~90 %</p>
<p><i>Conformity Certifications</i></p>	<p>EMI: FCC, CE, BSMI, C-Tick                  Safety: ETL, CB, BSMI                  Other: RoHS, Energy Star 5.0, ErP                  This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives:                  (1) 2004/108/EC relating to electromagnetic compatibility (EMC),                  (2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD),                  (3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)</p>

**Footnotes:**

**[1] HDMI output supports DVI-D with optional adapter**

**[2] How to convert DisplayPort to HDMI/DVI?**

The DisplayPort outputs can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1 m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5 m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either through DisplayPort (without an adapter) or HDMI/DVI (with an adapter). However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.

**[3] Three independent displays simultaneously**

The Shuttle XPC slim Barebone DQ170 supports a maximum of two displays with the same input connector. For example: Two displays can be connected through HDMI input - the first one directly to the HDMI output, the second one to the DisplayPort output with an adapter. A third digital display, if required, must be connected directly to the DisplayPort output (without an adapter).

**[4] 4K Ultra-HD resolution**

A 4K-display with Ultra-HD resolution (3840 x 2160) should only be connected via DisplayPort, as only this port supports a higher refresh rate of 60 Hz. Certain displays (e.g. Dell UP2414Q) however require MST mode (Multi-Stream Transport) to be enabled which sends two separate images at half resolution each to the display. These two images are then combined and put in correct order by the Intel graphics driver when in Collage mode. Please note that HBR2-mode (High Bit Rate 2) must be supported by each display to have more than one of them run at 4K resolution.

**[5] Optional D-Sub/VGA connector**

The mainboard features one analog graphics port CN6 on the mainboard. This signal can be lead to the outside as a 15-pin D-Sub VGA connector at the backpanel by using an optional adapter PVG01. However doing so means one serial port (COM) less can be used at the backpanel.

#### [6] Optional Wireless LAN module

The Shuttle XPC slim Barebone DQ170 supports an optional WLAN module, which consists of a half-size Mini-PCIe WLAN card and an external antenna with an appropriate antenna cable. Shuttle offers a suitable accessory kit "WLN-S" with two antennas.

#### [7] Notice - operating temperature

For high ambient temperatures over 40° C we strongly recommend to use SSDs (supporting at least 70 °C) and rugged SO-DIMM memory modules with a temperature range of up to 95 °C.

#### [8] Power-on-after-power-fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off. As a matter of the nature of this function, it may fail after short power failures. This is why the DQ170 also comes with a hardware-based solution. By removing Jumper JP2 (on the mainboard behind the power button) the system will start unconditionally once power is supplied.

#### [9] Teaming Mode

The teaming function allows you to group both available network adapters together to function as a single adapter. The benefit of this approach is that it enables load balancing and failover.

Driver download: <https://downloadcenter.intel.com/download/21642>

#### [10] Serial Ports

This PC features two serial RS232 ports with 9-pin D-Sub connectors at the back panel. The left COM port (COM 1) can also be configured as RS422 and RS485 in the BIOS setup. The COM ports are protected by black plastic caps. Pin 9 of the D-Sub COM-Port is a multi-functional signal. Based on the Jumper JP1 configuration on the mainboard, it can be configured as Ring Indicator (RI) or external power supply with a voltage level of either 5 V or 12 V. Each COM port can be configured separately. The maximum current is 500 mA per connector.

#### [11] Installation of Windows 7

Intel® 100 chipset series has removed support for the Enhanced Host Controller Interface (EHCI) which is the driver software for the USB 2.0 ports. The new chipset only supports the updated Extensible Host Controller Interface (xHCI for USB 3.0) which is not supported by the original Windows 7 installation disk. This means, that peripheral devices connected by USB (like keyboard, mouse and external optical drive) will not work during Windows 7 installation. To solve this, please add the required USB 3.0 drivers to the Windows 7 installation files - this procedure is explained in the Shuttle FAQ section at <http://global.shuttle.com/support/faqDetail?faqId=2380>.

6<sup>th</sup> Generation Intel Core Desktop Processor Family

Socket LGA 1151 14nm "Skylake-S" processor overview (Date: July 2016)

Processors with a TDP > 65 W are **not** supported (marked in red)

Class	Model	Cores/ Threads	CPU Clock	Turbo Clock	Cache	TDP	Graphics Engine	Graphics Clock	vPro
Core i7	6700K	4 / 8	4.0 GHz	4.2 GHz	8 MB	91 W	HD 530	350~1150 MHz	-
	6700	4 / 8	3.4 GHz	4.0 GHz	8 MB	65 W	HD 530	350~1150 MHz	Yes
	6700T	4 / 8	2.8 GHz	3.6 GHz	8 MB	35 W	HD 530	350~1100 MHz	Yes
Core i5	6600K	4 / 4	3.5 GHz	3.9 GHz	6 MB	91 W	HD 530	350~1150 MHz	-
	6600	4 / 4	3.3 GHz	3.9 GHz	6 MB	65 W	HD 530	350~1150 MHz	Yes
	6600T	4 / 4	2.7 GHz	3.5 GHz	6 MB	35 W	HD 530	350~1100 MHz	Yes
	6500	4 / 4	3.2 GHz	3.6 GHz	6 MB	65 W	HD 530	350~1150 MHz	Yes
	6500T	4 / 4	2.5 GHz	3.1 GHz	6 MB	35 W	HD 530	350~1100 MHz	Yes
	6402P	4 / 4	2.8 GHz	3.4 GHz	6 MB	65 W	HD 510	350~950 MHz	-
	6400	4 / 4	2.7 GHz	3.3 GHz	6 MB	65 W	HD 530	350~1150 MHz	-
Core i3	6400T	4 / 4	2.2 GHz	2.8 GHz	6 MB	35 W	HD 530	350~1100 MHz	-
	6320	2 / 4	3.9 GHz	-	4 MB	65 W	HD 530	350~1150 MHz	-
	6300	2 / 4	3.8 GHz	-	4 MB	65 W	HD 530	350~1150 MHz	-
	6300T	2 / 4	3.3 GHz	-	4 MB	35 W	HD 530	350~1100 MHz	-
	6100	2 / 4	3.7 GHz	-	4 MB	65 W	HD 530	350~1150 MHz	-
	6100T	2 / 4	3.2 GHz	-	4 MB	35 W	HD 530	350~1100 MHz	-
Pentium	6098P	2 / 4	3.6 GHz	-	3 MB	54 W	HD 510	350~1050 MHz	-
	G4520	2 / 2	3.6 GHz	-	3 MB	51 W	HD 530	350~1150 MHz	-
	G4500	2 / 2	3.5 GHz	-	3 MB	51 W	HD 530	350~1150 MHz	-
	G4500T	2 / 2	3.0 GHz	-	3 MB	35 W	HD 530	350~1100 MHz	-
	G4400	2 / 2	3.3 GHz	-	3 MB	51 W	HD 530	350~1150 MHz	-
Celeron	G4400T	2 / 2	2.9 GHz	-	3 MB	35 W	HD 530	350~1100 MHz	-
	G3920	2 / 2	2.9 GHz	-	2 MB	51 W	HD 530	350~1050 MHz	-
	G3900	2 / 2	2.8 GHz	-	2 MB	51 W	HD 530	350~1050 MHz	-
	G3900T	2 / 2	2.6 GHz	-	2 MB	35 W	HD 530	350~950 MHz	-

K = unlocked, T = Power optimized lifestyle, R = Intel® Iris™ Pro Graphics 580.

Note: Shuttle XPC slim Barebone products do not support the unlock-function of Intel K-Series processors.

Please refer to the support list for detailed processor support information at [global.shuttle.com](http://global.shuttle.com).