

CVR-QSFP28-SFP28

100G QSFP28 to SFP28 Converter (CVR) Module

FEATURES

- Trouble-free installation and network bring-up
- Compliant to industry standards: MSA SFF-8436, MSASFF-8431, MSASFF-8472
- Precision process control for minimization of pair-to-pair skew
- 1 independent duplex channels operating at 25Gbps
- All-metal housing for superior EMI performance
- 100 Ohm differential impedance system
- Operating case temperature: -20 to 85°C
- Low insertion loss
- Low crosstalk
- Secure latching mechanism
- RoHS compliant

APPLICATIONS

- Data Servers, Routers, Switches
- Networked storage systems
- Data Centre networking
- InfiniBand Trade Association (IBTA)

DESCRIPTION

QSFP28 to SFP28 Adapter (CVR) Module offers 25 Gigabit Ethernet connectivity for Quad Small Form Factor Pluggable (QSFP) only platforms. It allows smooth and cost effective migration to 100 Gigabit Ethernet by providing an option to use lower speed Enhanced Small Form Factor Pluggable (SFP28) modules in empty QSFP ports or when the other end of the network is running at lower speeds.

The CVR Module converts a QSFP port into an SFP28 port. With this adapter, customers have the flexibility to use any SFP28 module or cable to connect to a lower speed port on the other end of the network. This flexibility allows a cost effective transition to 100 Gigabit Ethernet by maximizing the use of high density 100 Gigabit Ethernet QSFP platforms. This adapter supports all SFP28 optics and cable reaches, compatible switch models and SFP28 Modules. A list of SFP28 transceiver modules that can be plugged into the CVR module is provided in the table below.


SFP28 TRANSCEIVER MODULES

Item	Product Name	Product Description
1	SFP-25G-SR	25GBASE-SR SFP28 Module for Multi-mode Fibre
2	SFP-25G-LR	25GBASE-LR SFP28 Module for Single-Mode Fibre
3	SFP-25G-ER	25GBASE-ER SFP28 Module for Single-Mode Fibre
4	SFP-25G-ZR	25GBASE-ZR SFP28 Module for Single-Mode Fibre
5	SFP-25G-BiDi	25GBASE-BiDi SFP28 Module for Single-Mode Fibre
6	25G SFP28 Copper Cables	SFP28 Copper Cables (1m to 10m lengths)
7	25G SFP28 Active Optical Cables	SFP28 Active Optical Cables (1m to 10m lengths)

RECOMMENDED OPERATING ENVIRONMENT

Parameter	Symbol	Min.	Max.	Unit
Operating Case Temperature	Topc	-20	85	°C
Storage Temperature	Tst	-40	125	°C
Relative Humidity (non-condensation)	RS	-	85	%
Supply Voltage	VCC3	3.15	3.45	V

QSFP28 HOST BOARD CONNECTOR PINOUT

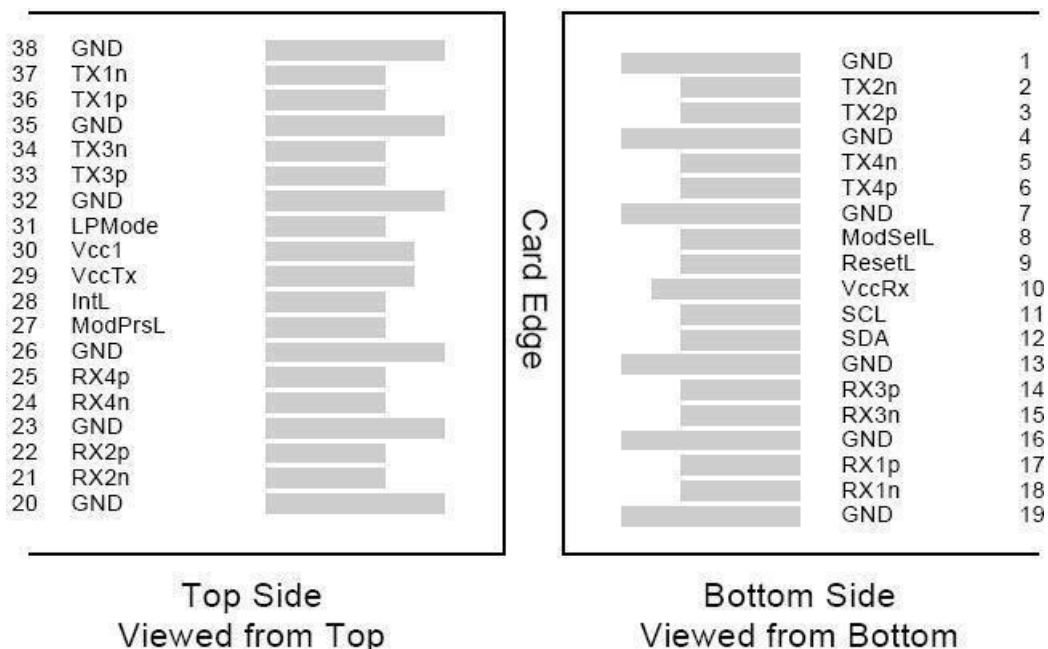

MSA Compliant Connector


QSFP28 PIN DEFINITIONS

Pin	Logic	Symbol	Name/Description	Note
1		GND	Ground	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	
4		GND	Ground	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	
7		GND	Ground	1
8	LVTLL-I	ModSelL	Module Select	
9	LVTLL-I	ResetL	Module Reset	
10		VccRx	+3.3V Power Supply Receiver	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	
13		GND	Ground	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	
15	CML-O	Rx3n	Receiver Inverted Data Output	
16		GND	Ground	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	
18	CML-O	Rx1n	Receiver Inverted Data Output	
19		GND	Ground	1
20		GND	Ground	1
21	CML-O	Rx2n	Receiver Inverted Data Output	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	
23		GND	Ground	1
24	CML-O	Rx4n	Receiver Inverted Data Output	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	
26		GND	Ground	1
27	LVTTL-O	ModPrsL	Module Present	
28	LVTTL-O	IntL	Interrupt	
29		VccTx	+3.3 V Power Supply transmitter	2
30		Vcc1	+3.3 V Power Supply	2
31	LVTTL-I	LPMODE	Low Power Mode	
32		GND	Ground	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	
34	CML-I	Tx3n	Transmitter Inverted Data Output	
35		GND	Ground	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	
37	CML-I	Tx1n	Transmitter Inverted Data Output	
38		GND	Ground	1

Note:

1. GND is the symbol for signal and supply (power) common for QSFP modules. All are common within the QSFP module, and all module voltages are referenced to this potential otherwise noted. Connect these directly to the host board signal common ground plane.
2. cc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power suppliers and are applied concurrently. Recommended host board power supply filtering is shown below. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

SFP28 HOST BOARD CONNECTOR OUTPUT FOR SFP+

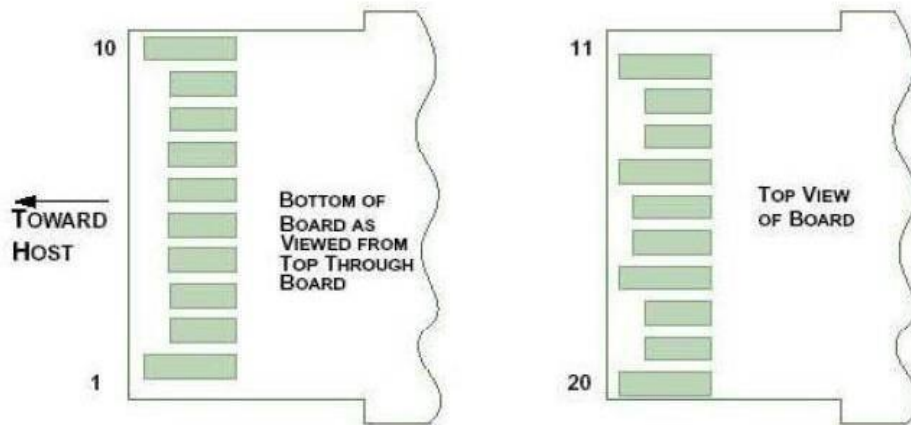

MSA Compliant Connector

SFP28 PIN DEFINITIONS

Pin	Logic	Symbol	Name/Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	Tx_Fault	Transmitter Fault	2
3	LVTTL-I	Tx_Disable	Transmitter Disable	3
4	LVTTL-I/O	SDA	MOD-DEF2 2-wire serial interface data line	4
5	LVTTL-I/O	SCL	MOD-DEF1 2-wire serial interface clock line	4
6		Mod_Abs	Module Absent	5
7	LVTTL-I	RS0	Rate Select Zero	
8	LVTTL-O	Rx_LOS	Module Receiver Loss of Signal	2
9	LVTTL-I	RS1	Rate Select One	
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3V Supply	
16		VccT	Module Transmitter 3.3V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

Note:

1. The module signal grounds, VeeR and VeeT, shall be isolated from the module case.
2. This is an open collector/drain output and shall be pulled up with 4.7-10k Ohms to Vcc_Host on the host board. Pull ups can be connected to multiple power supplies, however the host board design ensures that no module has voltage exceeding module VccT/R + 0.5V.
3. This is an open collector/drain input and shall be pulled up with 4.7-10k Ohms to VccT in the module.
4. See 2-wire electrical specifications.
5. This shall be pulled up with 4.7-10k Ohms to Vcc_Host on the host board.

PHYSICAL SPECIFICATIONS

Maximum outer dimensions (H x W x D)	13.5 x 18.4 x 78mm
Weight	Typically less than 100g