

Dell G3 15 3500

Setup and Specifications



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Dell G3 15 3500.....	4
Chapter 2: Views of Dell G3 15 3500.....	6
Right.....	6
Left.....	6
Base.....	8
Display.....	9
Bottom.....	10
Chapter 3: Specifications of Dell G3 15 3500.....	11
Dimensions and weight.....	11
Processor.....	11
Chipset.....	12
Operating system.....	12
Memory.....	12
External ports.....	13
Internal slots.....	13
Ethernet.....	14
Wireless module.....	14
Audio.....	14
Storage.....	15
Intel Optane Memory H10 with Solid State Storage (optional).....	16
Media-card reader.....	16
Keyboard.....	16
Camera.....	17
Touchpad.....	17
Power adapter.....	18
Battery.....	18
Display.....	19
Fingerprint reader (optional).....	20
GPU—Integrated.....	20
GPU—Discrete.....	21
Operating and storage environment.....	21
Chapter 4: Keyboard shortcuts.....	22
Chapter 5: Getting help and contacting Dell.....	25

Set up your Dell G3 15 3500

***(i)* NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



***(i)* NOTE:** To conserve battery power, the battery might enter power-saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [000131655](#) and [000131676](#) at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
- ***(i)* NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps


Resources	Description
	My Dell

Table 1. Locate Dell apps (continued)

Resources	Description
	Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.
	SupportAssist SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools . Click SupportAssist and then, click SupportAssist for Home PCs . (i) NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.
	Dell Update Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article 000149088 at www.dell.com/support .
	Dell Digital Delivery Download software applications, which are purchased but not preinstalled on your computer. For more information about using Dell Digital Delivery, see the knowledge base article 000129837 at www.dell.com/support .

Views of Dell G3 15 3500

Right

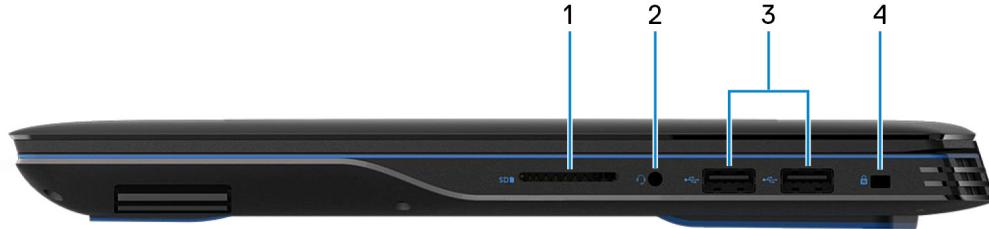

1. microSD-card slot

Reads from and writes to the microSD-card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

2. Headset port

Connect headphones or a headset (headphone and microphone combo).

3. USB 3.2 Gen 1 ports (2)


Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left

Computers shipped with NVIDIA GeForce GTX 1650

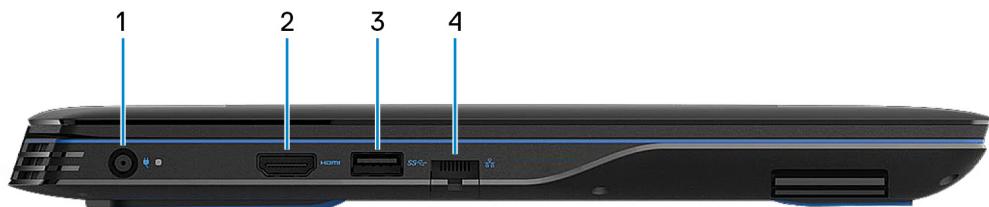

1. Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

2. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.


3. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

Computers shipped with NVIDIA GeForce GTX 1650 Ti

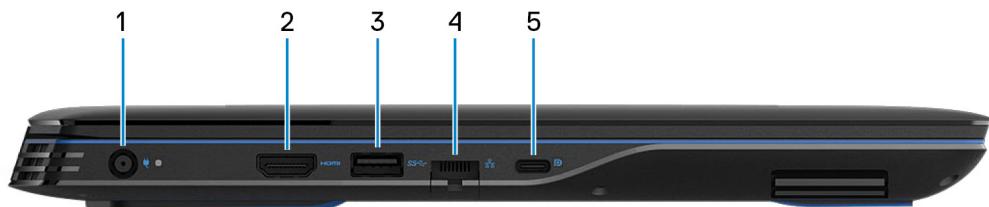

1. Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

2. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

3. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.


5. USB 3.2 Gen 2 (Type-C) port with DisplayPort

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports DisplayPort 1.4 and also enables you to connect an external display using a display adapter.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

Computers shipped with NVIDIA GeForce GTX 1660Ti and above

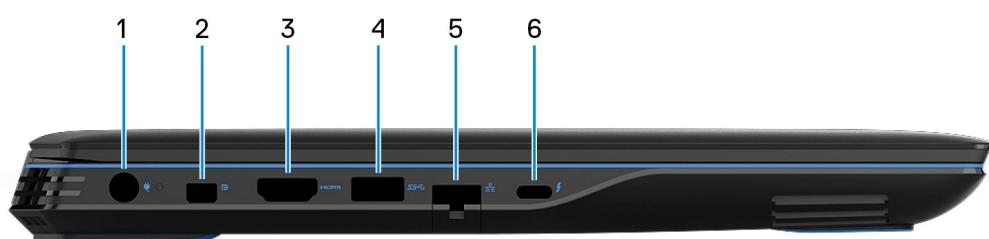

1. Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

2. Mini DisplayPort

Connect to a TV or another DisplayPort-in enabled device. Mini DisplayPort provides video and audio output.

3. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

5. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.


6. Thunderbolt 3 (USB Type-C) port

Supports USB 3.1 Gen 2, DisplayPort 1.4, Thunderbolt 3 and also enables you to connect to an external display using a display adapter.

Provides data transfer rates up to 10 Gbps for USB 3.1 Gen 2 and up to 40 Gbps for Thunderbolt 3.

(i) NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

Base

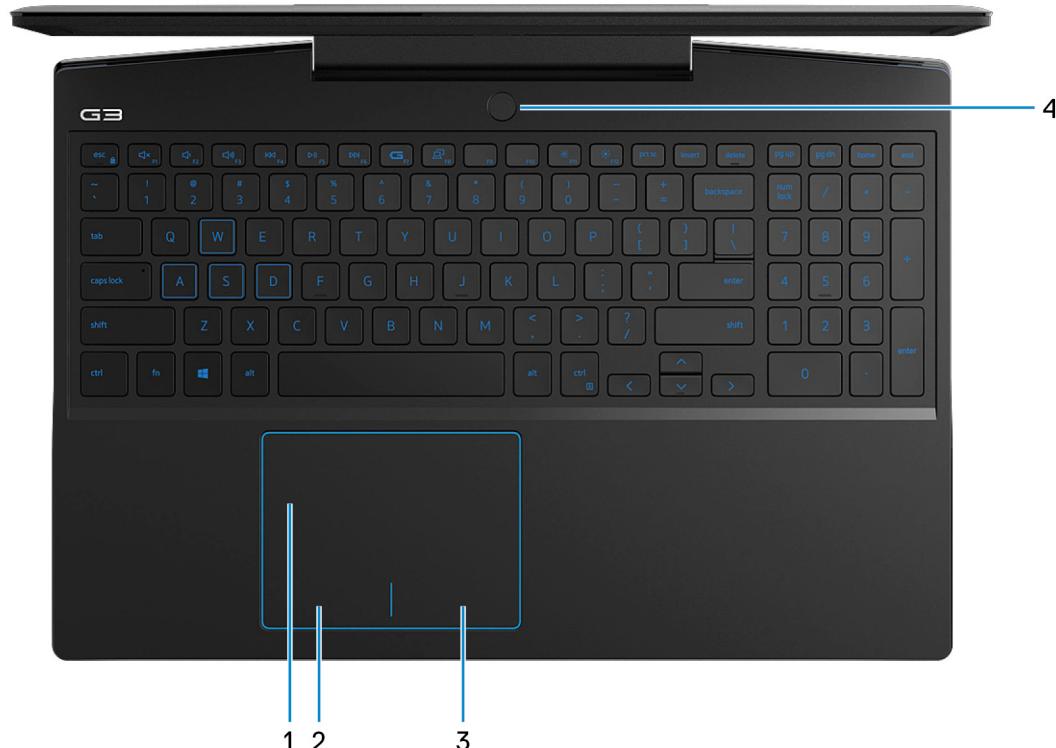

1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

2. Left-click area

Press to left-click.

3. Right-click area

Press to right-click.

4. Power button with optional fingerprint reader


Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

(i) NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

Display

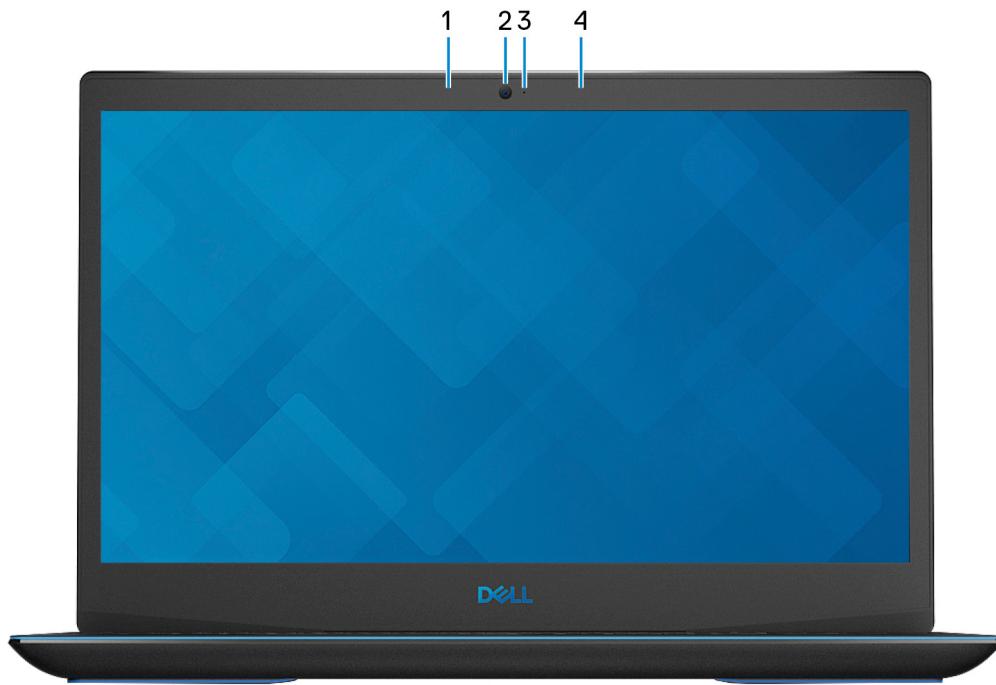

1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Camera

Enables you to video chat, capture photos, and record videos.

3. Camera-status light

Turns on when the camera is in use.

4. Right microphone

Provides digital sound input for audio recording and voice calls.

Bottom



1. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

Specifications of Dell G3 15 3500

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell G3 15 3500.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	21.60 mm (0.85 in.)
Peak height	<ul style="list-style-type: none"> 28.18 mm (1.11 in.): Computers shipped with NVIDIA GeForce GTX 1650 and 1650 Ti 30.96 mm (1.22 in.): Computers shipped with NVIDIA GeForce GTX 1660 Ti and above <p>i NOTE: Peak height values include the height of the computer and footers on the base cover.</p>
Rear height	<ul style="list-style-type: none"> 23.31 mm (0.92 in.): Computers shipped with NVIDIA GeForce GTX 1650 and 1650 Ti 26.57 mm (1.05 in.): Computers shipped with NVIDIA GeForce GTX 1660 Ti and above
Width	364.46 mm (14.35 in.)
Depth	254 mm (10.00 in.)
Weight (maximum)	<ul style="list-style-type: none"> 2.56 kg (5.64 lb): Computers shipped with NVIDIA GeForce GTX 1650 and 1650 Ti 2.58 kg (5.69 lb): Computers shipped with NVIDIA GeForce GTX 1660 Ti and above <p>i NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.</p>

Processor

The following table lists the details of the processors supported by your Dell G3 15 3500.

Table 3. Processor

Description	Option one	Option two
Processor type	10th Generation Intel Core i5-10200H	10th Generation Intel Core i7-10870H
Processor wattage	45 W	45 W
Processor core count	4	8
Processor thread count	8	16
Processor speed	Up to 4.1 GHz	Up to 5 GHz

Table 3. Processor (continued)

Description	Option one	Option two
Processor cache	8 MB	16 MB
Integrated graphics	Intel UHD Graphics 630	Intel UHD Graphics 630

Chipset

The following table lists the details of the chipset supported by your Dell G3 15 3500.

Table 4. Chipset

Description	Values
Chipset	HM470
Processor	10th Generation Intel Core i5/i7
DRAM bus width	128-bit
Flash EPROM	16 MB
PCIe bus	Up to Gen3

Operating system

Your Dell G3 15 3500 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Ubuntu 18.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Dell G3 15 3500.

Table 5. Memory specifications

Description	Values
Memory slots	Two SoDIMM slots
Memory type	Dual-channel DDR4
Memory speed	2933 MHz
Maximum memory configuration	16 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB
Memory configurations supported	<ul style="list-style-type: none"> • 8 GB, 1 x 8 GB, DDR4, 2933 MHz, SODIMM, ECC

Table 5. Memory specifications (continued)

Description	Values
	<ul style="list-style-type: none"> • 8 GB, 2 x 4 GB, DDR4, 2933 MHz, SODIMM, ECC, dual-channel • 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 2933 MHz, SODIMM, ECC • 16 GB, 2 x 8 GB, DDR4, 2933 MHz, SODIMM, ECC, dual-channel

External ports

The following table lists the external ports of your Dell G3 15 3500.

Table 6. External ports

Description	Values
Network port	One RJ45 port
USB ports	<ul style="list-style-type: none"> • One USB 3.2 Gen 1 port • Two USB 2.0 ports • One USB 3.2 Gen 2 (Type-C) port with DisplayPort (for computers shipped with NVIDIA GeForce GTX 1650 Ti) • One Thunderbolt 3 port (for computers shipped with NVIDIA GeForce GTX 1660 Ti and above)
Audio port	One headset (headphone and microphone combo) port
Video port	<ul style="list-style-type: none"> • One HDMI 2.0 port • One Mini DisplayPort 1.4b (for computers shipped with NVIDIA GeForce GTX 1660 Ti and above)
Media-card reader	One SD-card slot
Docking port	Not supported
Power-adapter port	One 7.4 mm x 5.1 mm power-adapter port
Security	One wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Dell G3 15 3500.

Table 7. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> • One M.2 2230 slot for WiFi and Bluetooth combo card • Two M.2 2230/2280 slots for solid-state drive/Intel Optane <p>NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article 000144170 at www.dell.com/support.</p>

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Dell G3 15 3500.

Table 8. Ethernet specifications

Description	Values
Model number	<ul style="list-style-type: none">Realtek GB LAN (for computers shipped with NVIDIA GeForce GTX 1650 and 1650 Ti)Killer E2500 PCI-e Gigabit ethernet controller (for computers shipped with NVIDIA GeForce GTX 1660 Ti and above)
Transfer rate	<ul style="list-style-type: none">10/100/1000 Mbps (for computers shipped with NVIDIA GeForce GTX 1650 and 1650 Ti)10/100/1000/2500 Mbps (for computers shipped with NVIDIA GeForce GTX 1660 Ti and above)

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Dell G3 15 3500.

Table 9. Wireless module specifications

Description	Option one	Option two	Option Three	Option Four
Model number	Intel 9462	Qualcomm QCA9377 (DW 1820)	Intel AX201	Killer 1650i
Transfer rate	Up to 433 Mbps	Up to 433 Mbps	Up to 2400 Mbps	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none">WiFi 802.11b/g/aWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)•	<ul style="list-style-type: none">WiFi 802.11b/g/aWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)Wi-Fi 6 (WiFi 802.11ax)	<ul style="list-style-type: none">WiFi 802.11b/g/aWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)Wi-Fi 6 (WiFi 802.11ax)	<ul style="list-style-type: none">WiFi 802.11b/g/aWi-Fi 4 (WiFi 802.11n)Wi-Fi 5 (WiFi 802.11ac)Wi-Fi 6 (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none">64-bit/128-bit WEPAES-CCMPTKIP	<ul style="list-style-type: none">64-bit/128-bit WEPAES-CCMPTKIP	<ul style="list-style-type: none">64-bit/128-bit WEPAES-CCMPTKIP	<ul style="list-style-type: none">64-bit/128-bit WEPAES-CCMPTKIP
Bluetooth	Bluetooth 5	Bluetooth 4.2	Bluetooth 5	Bluetooth 5

Audio

The following table lists the audio specifications of your Dell G3 15 3500.

Table 10. Audio specifications

Description	Values
Audio controller	Realtek ALC3254 with Nahimic 3D Audio for Gamers

Table 10. Audio specifications (continued)

Description	Values
Stereo conversion	Supported
Internal audio interface	Intel High-Definition Audio (HDA) via HDMI
External audio interface	Headset combo connector/Digital-array microphone input on camera module
Number of speakers	Two
Internal-speaker amplifier	Supported (audio codec built-in amplifier)
External volume controls	Keyboard shortcut controls
Speaker output:	
Average speaker output	2 W
Peak speaker output	2.5 W
Subwoofer output	Not supported
Microphone	Dual-array microphones

Storage

This section lists the storage options on your Dell G3 15 3500.

Your Dell G3 15 3500 supports one of the following storage configurations:

- One M.2 2230/2280 solid-state drive
- One M.2 2230 solid-state drive and one M.2 2280 solid-state drive
- One 2.5-inch hard drive and one Intel Optane

NOTE: 2.5-inch hard drive is supported only on the computers shipped with 3-cell (51 Wh) battery.

- One 2.5-inch hard drive and one M.2 2230/2280 solid-state drive

NOTE: 2.5-inch hard drive is supported only on the computers shipped with 3-cell (51 Wh) battery.

The primary drive of your Dell G3 15 3500 varies with the storage configuration. For computers:

- with an M.2 drive, the M.2 drive is the primary drive
- without an M.2 drive, the 2.5-inch drive is the primary drive

Table 11. Storage specifications

Storage type	Interface type	Capacity
2.5-inch hard drive	SATA AHCI, up to 6 Gbps	Up to 2 TB
M.2 2230/2280 solid-state drive	PCIe Gen3 x4 NVMe	Up to 1 TB
M.2 2280 Intel Optane storage	PCIe Gen3 x4 NVMe	Up to 512 GB

Intel Optane Memory H10 with Solid State Storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H10 with Solid State Storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

Table 12. Intel Optane Memory H10 with Solid State Storage specifications

Description	Values
Interface	PCIe 3 x4 NVMe <ul style="list-style-type: none">One PCIe 3 x2 for Optane memoryOne PCIe 3 x2 for solid-state storage
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

i **NOTE:** Intel Optane Memory H10 with Solid State Storage is supported on computers that meet the following requirements:

- 9th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 15.9.1.1018 or higher

Media-card reader

The following table lists the media cards supported by your Dell G3 15 3500.

Table 13. Media-card reader specifications

Description	Values
Media-card type	One SD card
Media-cards supported	<ul style="list-style-type: none">Secure Digital (SD)Secure Digital High Capacity (SDHC)Secure Digital Extended Capacity (SDXC)

i **NOTE:** The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.

Keyboard

The following table lists the keyboard specifications of your Dell G3 15 3500.

Table 14. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none">Standard keyboardBacklit keyboard

Table 14. Keyboard specifications (continued)

Description	Values
	<ul style="list-style-type: none"> Four-zone RGB backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> United States and Canada: 101 keys United Kingdom: 102 keys Japan: 105 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p> <p>For more information, see keyboard shortcuts.Keyboard shortcuts</p>

Camera

The following table lists the camera specifications of your Dell G3 15 3500.

Table 15. Camera specifications

Description	Values
Number of cameras	One
Camera type	RGB HD camera
Camera location	Front camera
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	78.6 degrees

Touchpad

The following table lists the touchpad specifications of your Dell G3 15 3500.

Table 16. Touchpad specifications

Description	Values
Touchpad resolution:	

Table 16. Touchpad specifications (continued)

Description		Values
	Horizontal	1229
	Vertical	749
Touchpad dimensions:		
	Horizontal	105 mm (4.13 in.)
	Vertical	80 mm (3.15 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Dell G3 15 3500.

Table 17. Power adapter specifications

Description		Option one	Option two
Type		130 W	240 W
Connector dimensions:			
	External diameter	7.40 mm	7.40 mm
	Internal diameter	5.10 mm	5.10 mm
Input voltage		100 VAC–240 VAC	100 VAC–240 VAC
Input frequency		50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)		1.80 A	3.50 A
Output current (continuous)		6.70 A	12.31 A
Rated output voltage		19.50 VDC	19.50 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Dell G3 15 3500.

Table 18. Battery specifications

Description		Option one	Option two
Battery type		3-cell (51 Wh) "smart" lithium-ion	4-cell (68 Wh) "smart" lithium-ion
Battery voltage		11.40 VDC	11.40 VDC

Table 18. Battery specifications (continued)

Description		Option one	Option two
Battery weight (maximum)		0.23 kg (0.51 lb)	0.23 kg (0.51 lb)
Battery dimensions:			
	Height	241.25 mm (9.50 in.)	241.25 mm (9.50 in.)
	Width	67.45 mm (2.66 in.)	67.45 mm (2.66 in.)
	Depth	7.05 mm (0.28 in.)	7.05 mm (0.28 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) ① NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		4 hours (when the computer is off)	4 hours (when the computer is off)
Coin-cell battery		CR2032	CR2032

Display

The following table lists the display specifications of your Dell G3 15 3500.

Table 19. Display specifications

Description		Option one	Option two	Option three	Option four
Display type	Full High Definition (FHD)				
Display-panel technology	Wide-Viewing Angle (WVA)				
Display-panel dimensions (active area):					
Height	139.59 mm (5.50 in.)	193.59 mm (7.62 in.)			
Width	344.16 mm (13.55 in.)	350.66 mm (13.81 in.)			
Diagonal	395 mm (15.55 in.)				
Display-panel native resolution	1920 x 1080				

Table 19. Display specifications (continued)

Description	Option one	Option two	Option three	Option four
Luminance (typical)	220 nits	300 nits	300 nits	250 nits
Megapixels	2.07	2.07	2.07	2
Color gamut	45% NTSC	72% NTSC	72% NTSC	45% NTSC
Pixels Per Inch (PPI)	141	141	141	141
Contrast ratio (typ)	800 : 1	700 : 1	800 : 1	800 : 1
Response time (min)	35 ms	35 ms	19 ms	35 ms
Refresh rate	60 Hz	60 Hz	144 Hz	120 Hz
Horizontal view angle	85 +/- degrees	85 +/- degrees	85 +/- degrees	80 +/- degrees
Vertical view angle	85 +/- degrees	85 +/- degrees	85 +/- degrees	80 +/- degrees
Pixel pitch	0.18 mm	0.18 mm	0.18 mm	0.18 mm
Power consumption (maximum)	4.20 W	6.2 W	7.8 W	4.6 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare	Anti-glare
Touch options	No	No	No	No

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell G3 15 3500.

Table 20. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	108 x 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell G3 15 3500.

Table 21. GPU—Integrated

Controller	Memory size	Processor
Intel UHD Graphics 630	Shared system memory	10th Generation Intel Core i5/i7

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Dell G3 15 3500.

Table 22. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA GeForce GTX 1650	4 GB	GDDR6
NVIDIA GeForce GTX 1650 Ti	4 GB	GDDR6
NVIDIA GeForce GTX 1660 Ti	6 GB	GDDR6
NVIDIA GeForce RTX 2060	6 GB	GDDR6

Operating and storage environment

This table lists the operating and storage specifications of your Dell G3 15 3500.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 23. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

i **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press **Shift** and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys **F1** to **F12** at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing **F1** mutes the audio (refer to the table below).

However, if the function keys **F1** to **F12** are needed for specific software applications, multi-media functionality can be disabled by pressing **fn** + **Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

i **NOTE:** You can also define the primary behavior of the function keys (**F1** to **F12**) by changing **Function Key Behavior** in the BIOS setup program.

Table 24. List of keyboard shortcuts

Function key	Redefined key (for multimedia control)	Behavior
	fn +	Mute audio
	fn +	Decrease volume
	fn +	Increase volume
	fn +	Play previous track/chapter
	fn +	Play/Pause
	fn +	Play next track/chapter
	fn +	Enable/disable Game Shift
	fn +	Switch to external display
	fn +	Search

Table 24. List of keyboard shortcuts (continued)

Function key	Redefined key (for multimedia control)	Behavior
	 + 	Toggle keyboard backlight (optional) NOTE: Non-backlight keyboards have the F10 function key without the backlight icon. In this case, the function key does not toggle the keyboard backlight function.
	 + 	Decrease brightness
	 + 	Increase brightness

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 25. List of keyboard shortcuts


Function key	Behavior
 + 	Turn off/on wireless
 + 	Pause/Break
 + 	Sleep
 + 	Toggle scroll lock
 + 	Toggle between power and battery-status light/hard-drive activity light
 + 	System request
 + 	Open application menu
 + 	Toggle fn-key lock
 + 	Page up
 + 	Page down
 + 	Home

Table 25. List of keyboard shortcuts (continued)

Function key	Behavior
 + 	End

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 26. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type Contact Support , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	<p>Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support.</p> <p>For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer.</p>
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

(i) NOTE: Availability varies by country/region and product, and some services may not be available in your country/region.

(i) NOTE: If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.