



msi

MOTHERBOARD X299 SLI PLUS MAXIMUM CLASS



SPECIFICATIONS


Model Name	X299 SLI PLUS
CPU support	Supports New Intel® Core™ X-series Processor Family
CPU socket	LGA 2066
Chipset	Intel® X299 Chipset
Graphics Interface	4 x PCI-E 3.0 x16 Slots 3-way SLI / CrossFire
Memory support	8 DIMMs, Quad Channel DDR4-4133(OC)+, Dual Channel DDR4-4500(OC)+
Expansion slots	2 x PCI-E 3.0 x1 Slots
SATA / M.2 / U.2	8 x SATA 6Gb.s ports, 2 x Turbo M.2 slots, 1 x Turbo U.2 connector
Intel® Optane™	Intel® Optane™ Memory Ready
USB 3.1 Gen2	3 x USB 3.1 Gen2 (Type A+C)
USB 3.1 Gen1	8 x USB 3.1 Gen1
USB 2.0	8 x USB 2.0
LAN	Intel® I219V + Intel® I211-AT Gigabit LAN
Audio	7.1 Channel High Definition Audio with S/PDIF
Form Factor	ATX

FEATURES

1. Dual Intel® LAN: The best solution for both Intranet and Internet through hardware design and bandwidth management offering the lowest latency.
2. M.2 SHIELD: Keep M.2 SSDs safe while preventing throttling, making them run cooler & faster.
3. DDR4 BOOST: Give your DDR4 memory a performance boost.
4. Designed for Extreme Performance: TURBO SOCKET with OC Genie 4, DIGITALL POWER Design
5. Lightning Fast Experience: TWIN TURBO M.2 and Intel® Optane Memory Ready, Turbo U.2, LIGHTNING USB 3.1 GEN2
6. MYSTIC LIGHT: 7 mixed color schemes / 8 LED effects controlled in one click
7. SYSTEM SAVER: 3 easy-to-use options to successfully boot your system again.
8. AUDIO BOOST 4: Reward your ears with studio grade sound quality for the most immersive audio experience

REAR CONNECTORS

- | | |
|------------------------------|--------------------------|
| 1. Clear CMOS Button | 8. USB 3.1 Gen1 |
| 2. Keyboard / Mouse | 9. USB 3.1 Gen2 Type-A/C |
| 3. USB 2.0 | 10. Optical S/PDIF-Out |
| 4. Dual Intel® LAN | |
| 5. Golden Audio Connectors | |
| 6. BIOS Flashback Button | |
| 7. USB 2.0 / BIOS Flashback+ | |

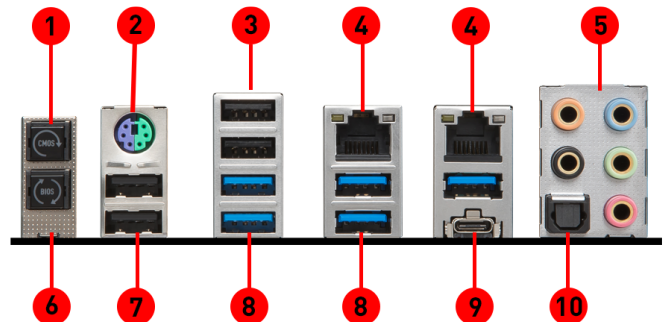

For more information check our [Product page](#)
This datasheet was generated on Jul 5 2017

Product specifications and colors are subject to change without notice and may vary from those shown. Errors and omissions excepted.