

#### J4859C-LEG

1.25Gbps SFP Transceiver

#### **Features**

- Up to 1.25Gb/s data links
- Duplex LC connector
- Hot-pluggable SFP footprint
- 1310nm FP laser transmitter
- RoHS compliant and Lead Free
- Up to 10km on 9/125um SMF
- Metal enclosure for lower EMI
- Single +3.3V power supply
- Low power dissipation <800mW</li>
- Commercial and industrial operating temperature optional
- SFP MSA SFF-8074i Complaint



### **Applications**

- ▶ 1000Base-LX
- 1x Fibre Channel

### **Product Description**

Legrand's J4859C-LEG Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 1.25Gbps/1.06Gbps and 10km transmission distance with SMF.

Legrand's SFP transceivers are RoHS compliant and lead-free.

### **Regulatory Compliance**


- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2.
- Immunity compatible with IEC 61000-4-3.
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2.
- RoHs compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

### **Pin Descriptions**

Pin	Symbol	Name/Descriptions	Ref.
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	TX Fault	Transmitter Fault.	
3	TX Disable	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD DEF (2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF (1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF (0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required.	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	4
9	VeeR	Receiver Ground (Common with Transmitter Ground)	1
10	VeeR	Receiver Ground (Common with Transmitter Ground)	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VeeR	Receiver Ground (Common with Transmitter Ground)	1
15	VccR	Receiver Power Supply.	
16	VccT	Transmitter Power Supply.	
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground (Common with Receiver Ground)	1


### Notes:

- 1. Circuit ground is internally isolated from chassis ground.
- 2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable <0.8V.
- 3. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
- 4. LOS is open collector output. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

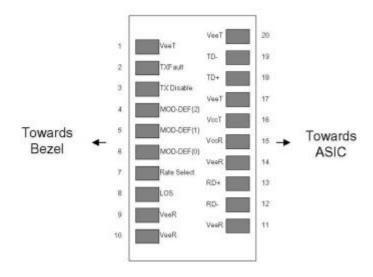

Pin-out of connector Block on Host board

### **Recommend Circuit Schematic**

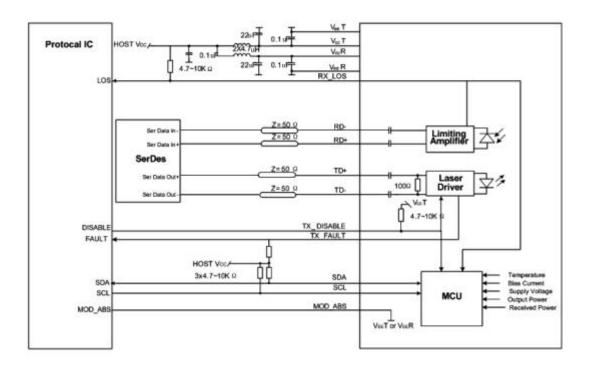

## **Absolute Maximum Ratings**

Parameter	Symbol	Min.	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5	4.0	V
Storage Temperature	TS	-40	85	°C
Operating Humidity	RH	5	95	%

# **Recommended Operating Conditions**

Parameter	Symbol	Min.	Тур.	Max.	Unit
Power Supply Voltage	Vcc	3.13	3.30	3.47	V
Power Supply Current	Icc			250	mA
Case Operating Temperature – Commercial	Тс	0		70	°C
Case Operating Temperature – Industrial	Ti	-40		85	°C
Data Rate (Gigabit Ethernet)			1.25		Gbps
Data Rate (Fibre Channel)			1.063		Gbps
9/125μm G.652 SMF	Lmax			10	km

# Electrical Characteristics (TOP=25°C, Vcc=3.3V)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes	
Transmitter							
Input differential impedance	Rin		100		Ω	1	
Single ended data input swing	Vin, pp	250		1200	mV		
TX Disable-High		Vcc-1.3		Vcc	V		
TX Disable-Low		Vee		Vee+0.8	V		
TX Fault-High		Vcc-0.5		Vcc	V		
TX Fault-Low		Vee		Vee+0.5	V		
Receiver							
Single ended data output swing	Vout, pp	300	400	800	mV	2	
Data output rise time	tr			175	ps	3	
Data output fall time	tf			175	ps	3	
LOS-High		Vcc-0.5		Vcc	V		
LOS-Low		Vee		Vee+0.5	V		

## Notes:

- 1. AC coupled.
- 2. Into 100 ohm differential termination.
- 3. 20% 80%

### **Optical and Electrical Characteristics**


Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes		
Transmitter								
Output Opt. Power	РО	-9.5		-3	dBm	1		
Optical Wavelength	λ	1275	1310	1350	nm			
Spectral Width	σ			3	nm			
Optical Rise/Fall Time	tr/tf			260	ps	2		
Total Jitter	TJ			200	ps			
Optical Extinction Ratio	ER	9			dB			
Receiver								
RX Sensitivity @1.25 Gb/s	RSENS			-21	dBm	3,4		
Maximum Received Power	RX <sub>MAX</sub>	-3			dBm			
Optical Center Wavelength	λC	1270		1600	nm			
LOS De-Assert	LOSD			-22	dBm			
LOS Assert	LOSA	-42			dBm			
LOS Hysteresis		0.5		5	dB			


### **Notes:**

- 1. Class 1 Laser Safety.
- 2. Unfiltered, 20%-80%. Complies with GE and 1x FC eye masks when filtered.
- 3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
- 4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

### **Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).



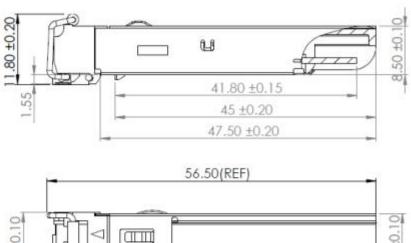

### **EEPROM Information**

EEPROM memory map specific data field description is as below:

