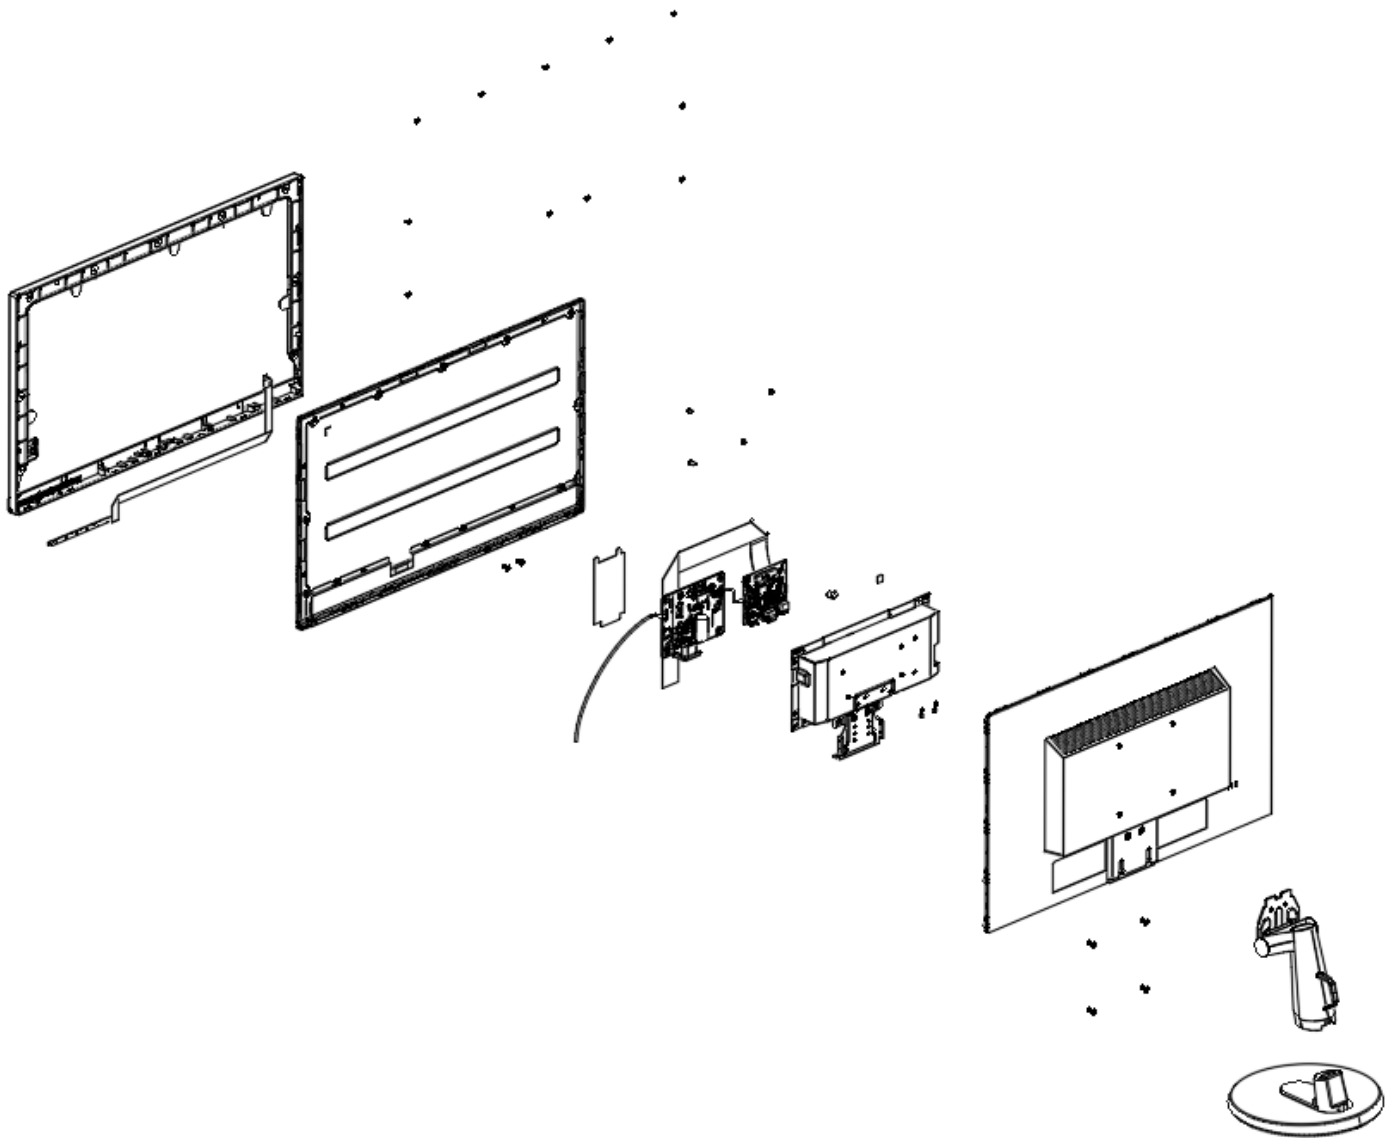


# D24-40 Simplified service manual for dismantling


Model Name: Lenovo D24-40

Exploded Diagram



1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.  
Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

<p>Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.</p>	
<p>Hold LCD by the side carefully and DON'T touch or press panel directly.</p>	

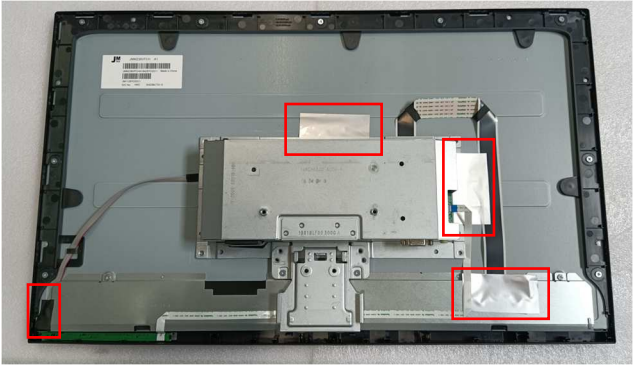
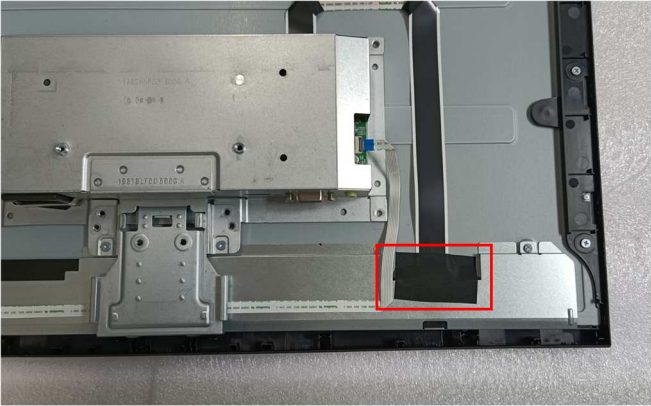
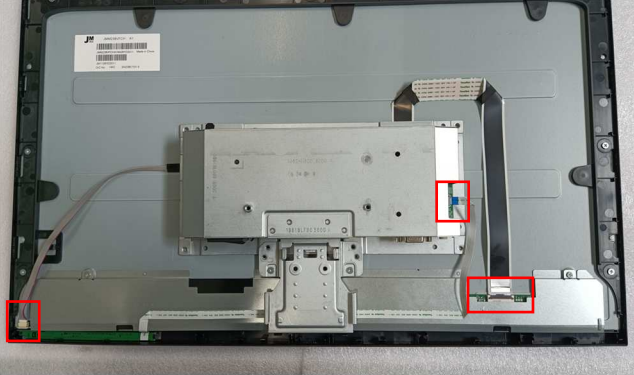
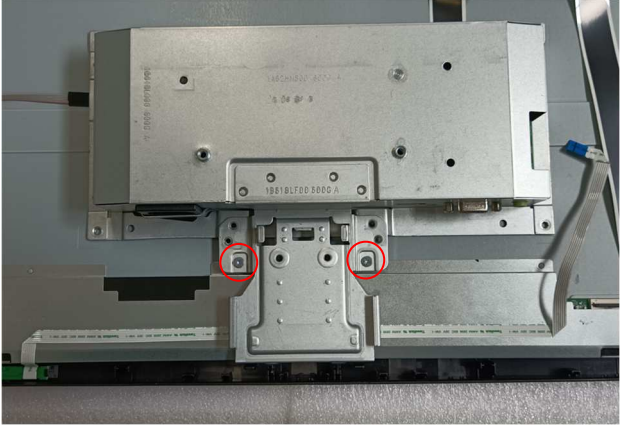
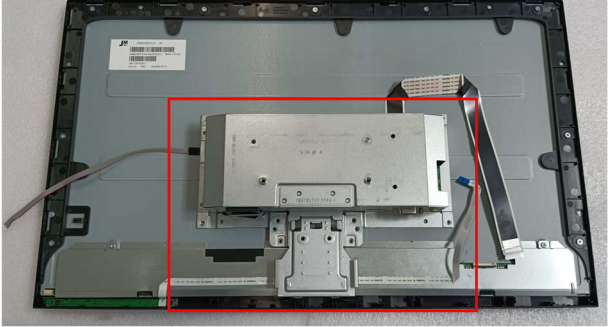
2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.

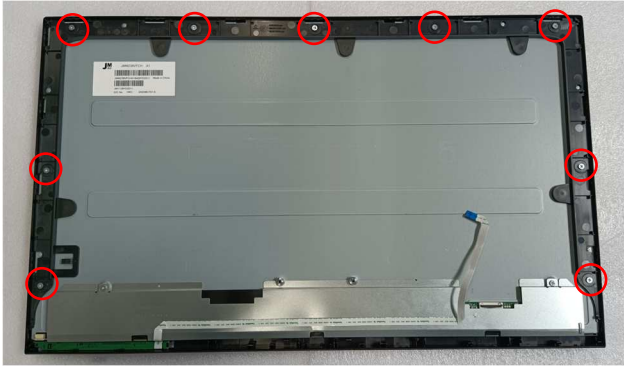


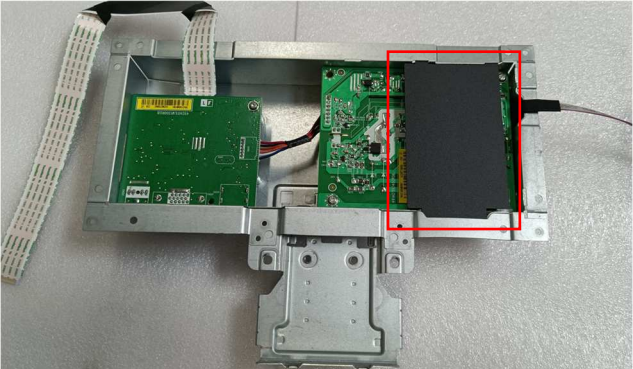
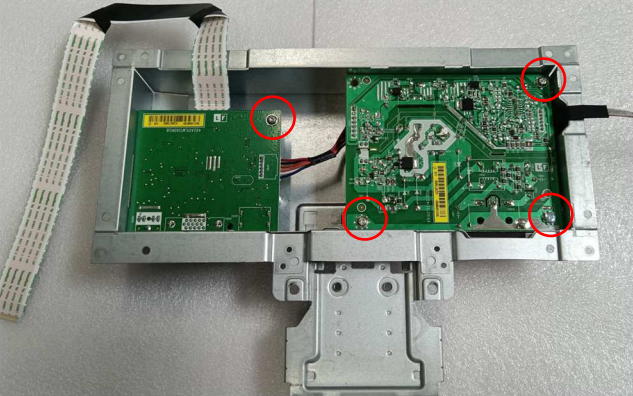
Phillips screwdriver (#2)	
Spacer screwdriver	
C/D disassembly tool	
Gloves or soft cloth	

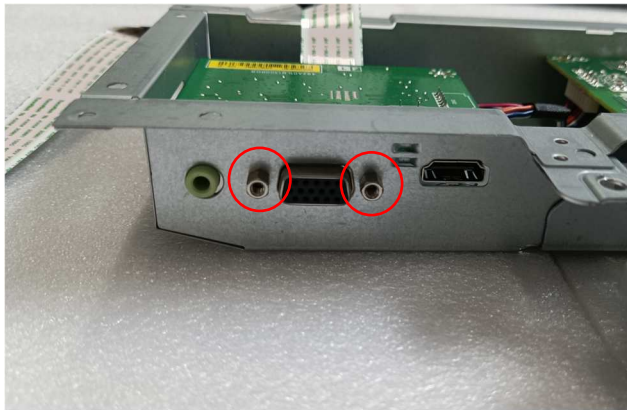
3. Disassembly SOP

Put the monitor on a flat surface (Put the EPE under the monitor)		
Remove the screw * 2pcs Tool : Screwdriver #2		
Pull out of stand		
Remove the screw * 4pcs Tool : Screwdriver #2		
Use the C/D disassembly tool to release Rear cover hook from disassemble hole on bottom		

Remove all the foil and tape	
Remove the tape	
Unplug the connector	
Remove the screw * 2pcs Tool : Screwdriver #2	
Remove the chassis	



Remove the screw * 9pcs Tool : Screwdriver #2	
Take out of the panel	
Remove the K/P PCB	
Remove the mylar	
Remove All screws*4pcs Tool : Screwdriver #2	

<p>Remove the side screw*2pcs</p> <p>Tool : Spacer screwdriver</p>	
<p>Take out of the PCB</p>	