


RM-NUC-T1

VENDOR
Universal

SUPPORTED MODELS
NUC's

COLOR
BLACK

DIMENSIONS
(HxWxD)
58.7 x 483 x 217 mm
2.31 x 19.00 x 8.54 inch

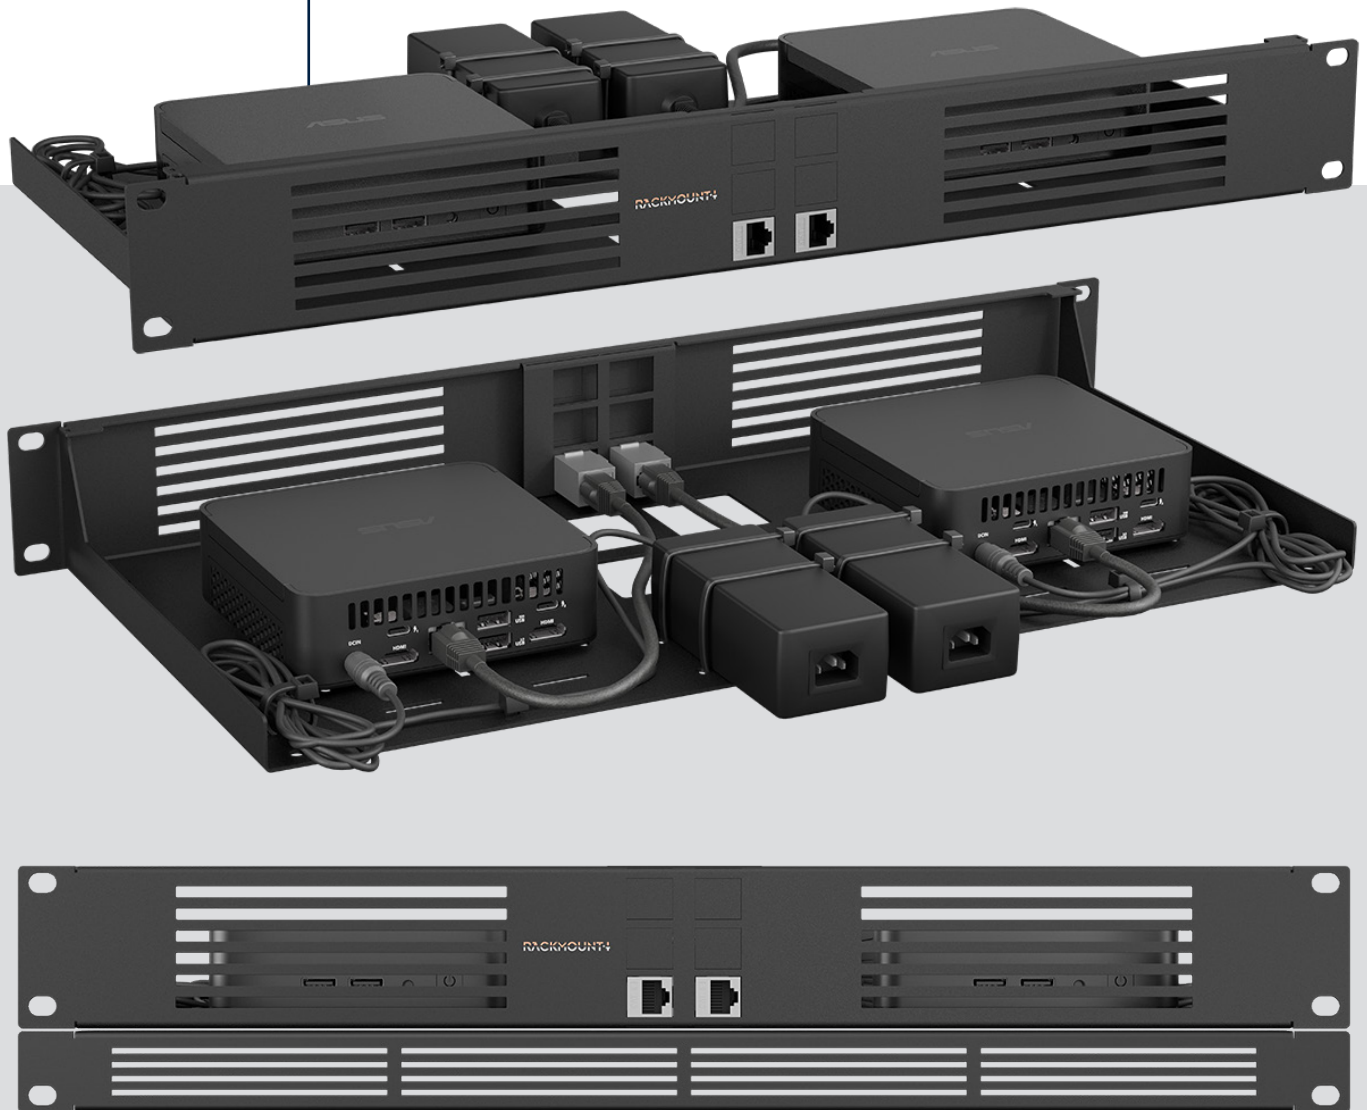

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

For support, contact Emerson GSC.

RACKMOUNT-T1

Install Guide - 07-08-2025

RM-NUC-T1

VENDOR
Universal

SUPPORTED MODELS
NUC's

COLOR
BLACK

DIMENSIONS
(HxWxD)
58.7 x 483 x 217 mm
2.31 x 19.00 x 8.54 inch



MOUNTING INSTRUCTIONS

The NUC can be installed directly onto the rackmount or using a VESA mount. With both methods, the NUC can be oriented in any direction. When placed directly on the rack, it can also be repositioned along the X or Y axis.

VESA Installation

1. Place the VESA mount on the rack. Insert 4 silver screws from the bottom of the rack through the rack and the VESA mount, then secure it with 4 nuts.
2. Slide the NUC onto the VESA mount and continue with step 3.

Direct Installation

1. Place the NUC on the rack with the mounting holes aligned above the slots. Secure it with 2 black screws.
3. Place the power supply on the rack and secure it with 2 zip ties. Connect the power supply to the appliance.
4. Form a small loop with the power cable and tie it to the rack as strain relief. Secure any excess cable to the rack.
5. Connect the appliance to the keystone using the supplied cable.

Optional – Additional Keystone

6. To install more keystones, remove the metal brackets in the front plate. Use a hammer and screwdriver to break them out, then wiggle until they come loose. Be cautious of sharp edges.
7. Place the rackmount in your cabinet and install the blindplate below it.

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.

PACKAGE CONTENTS

- 1 Rackmount
- 1 Blindplate
- 8 Nut M3
- 8 Screw silver M3 6mm
- 6 Screw black M3 8mm
- 8 Zip ties
- 2 Cat 6 shielded cable
- 1 Allen key

Appliance not included.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

Email support@rackmount.it or contact your reseller.

RACKMOUNT

Install Guide - 07-08-2025