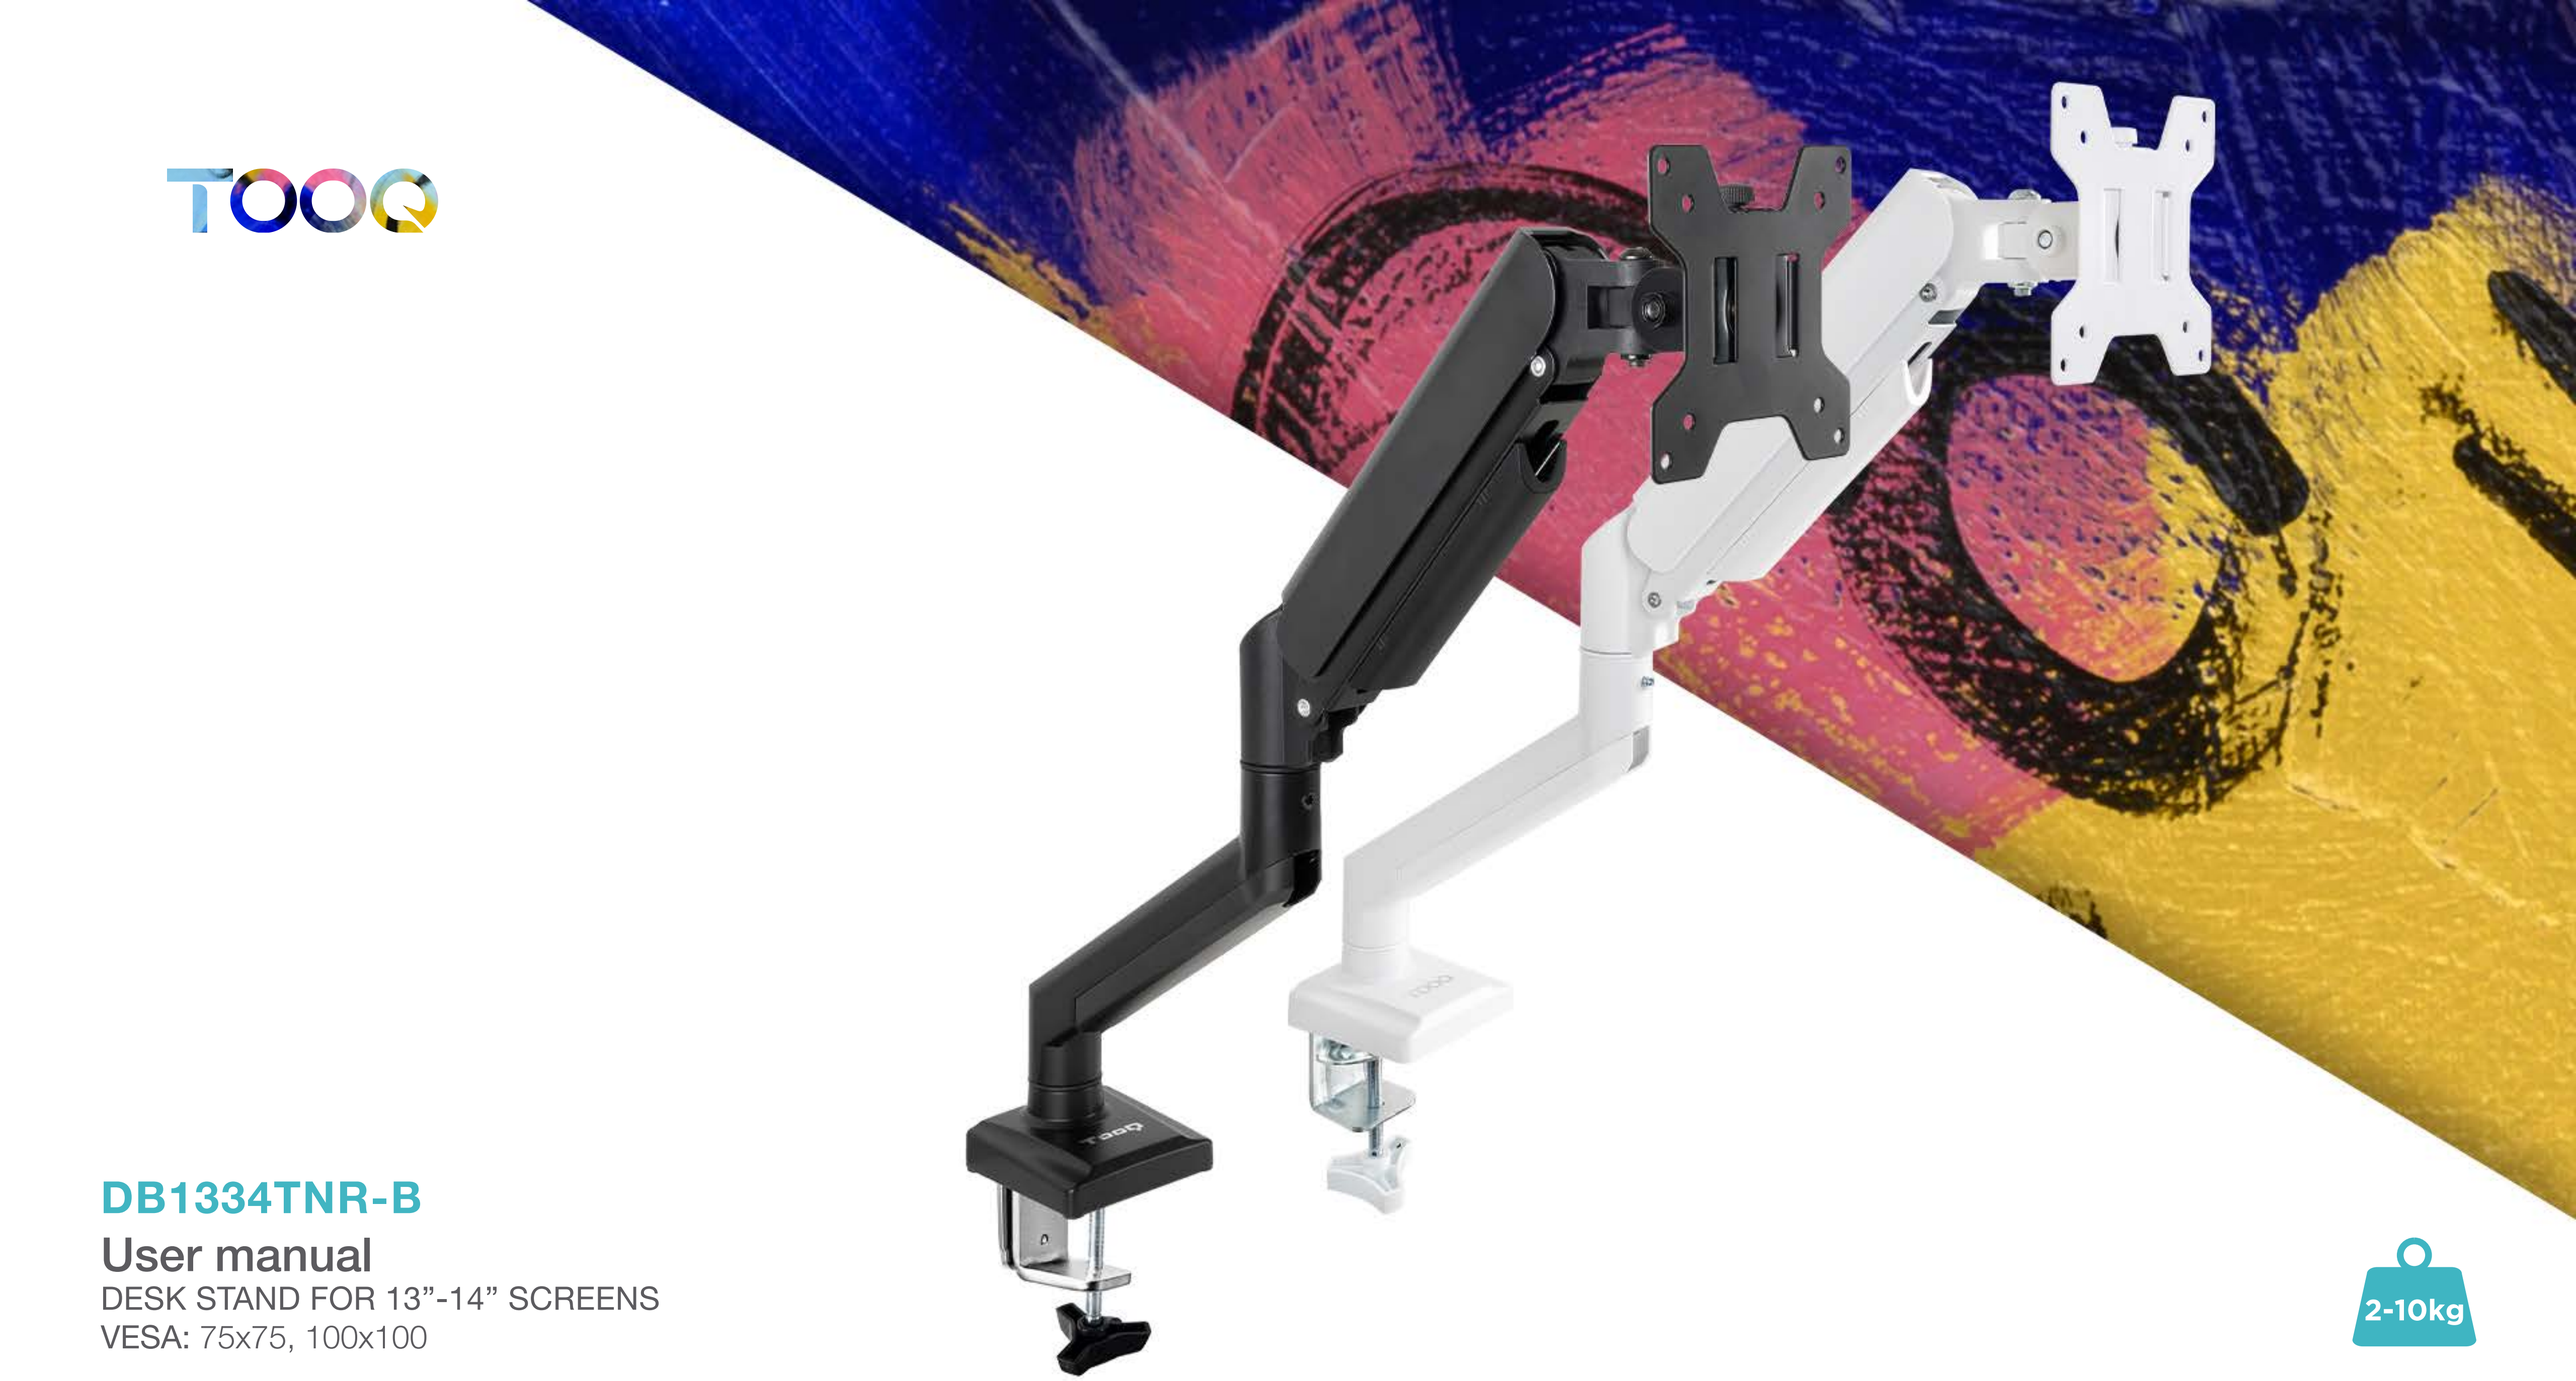


# DB1334TNR-B


## User manual

DESK STAND FOR 13”-14” SCREENS

VESA: 75x75, 100x100

2-10kg


# Content




A (x1)




B (x1)




C (x1)



D (x1)



E (x1)



F (x1)



G (x2)
M6x10 mm



H (x1)
M8x100 mm



I (x1)
M8




J (x1)
4 mm



K (x1)
5 mm



L (x1)
6 mm



M-A (x4)
M4x12



M-B (x4)
M4x25



M-C (x4)
Ø 4.5 mm



M-D (x4)
H 5 mm

# Before installation

• Read the instruction manual, if you are in any doubt about the instructions or warnings, contact your local dealer.
• Make sure you have received all parts according to the components checklist for installation. If any parts are missing or defective, please contact your local distributor.




• Installation of heavier products may result in instability and possible personal injury.
• The brackets must be assembled as specified in the assembly instructions. Incorrect installation may result in product failure and serious personal injury.
• Proper safety equipment and tools must be used. This product should only be installed by professionals.
• Ensure that the mounting surface can safely support the total weight of the equipment and all its components.
• Use the supplied mounting screws and DO NOT OVERTIGHTEN THEM.
• This product contains small parts that could be a choking hazard if swallowed.
• Keep these products away from children. This product is intended for indoor use only. Outdoor use will not only damage the product but may also cause personal injury.
• Please refer to the product warranty here.

# Base installation


## Option 1


**Note:** Mount clamp (2) to base (1) with bolts (G). Tighten them by using 4 mm Allen key (J).

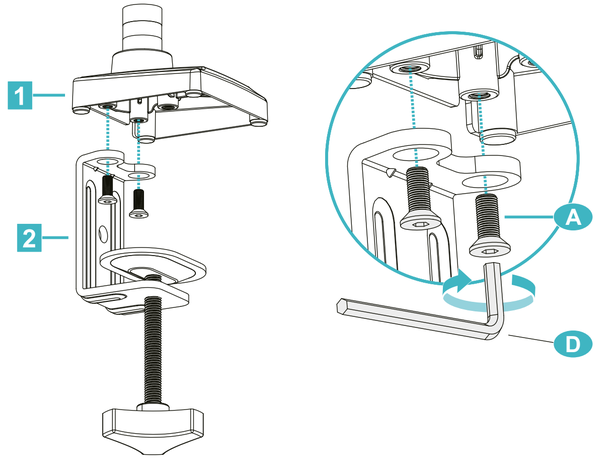


## Option 2

**Note:** Secure stand to desktop by tightening clamp.

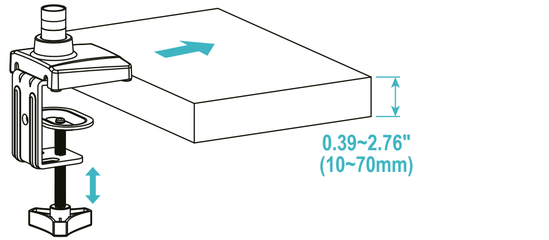






# Base installation

## Option 1


**Note:** Detach the clip plate (2-3) form clamp (2) by using 5 mm Allen key (K). Install the long bolt (H) to base (1).

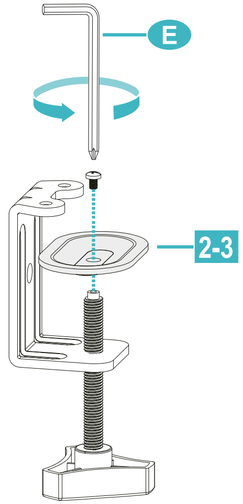

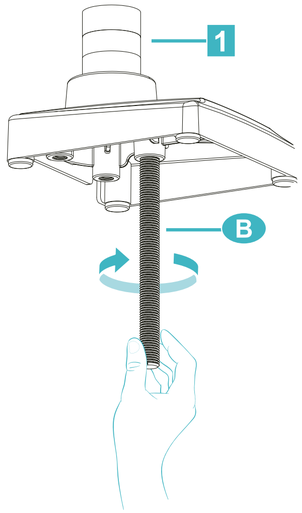

## Option 2


**Note:** Remove the plastic protector from the hole (if any). Run the long bolt (H) with base (1) through the clip plate (2-3) and the grommet hole on desktop. Then tighten the wingnut (C).

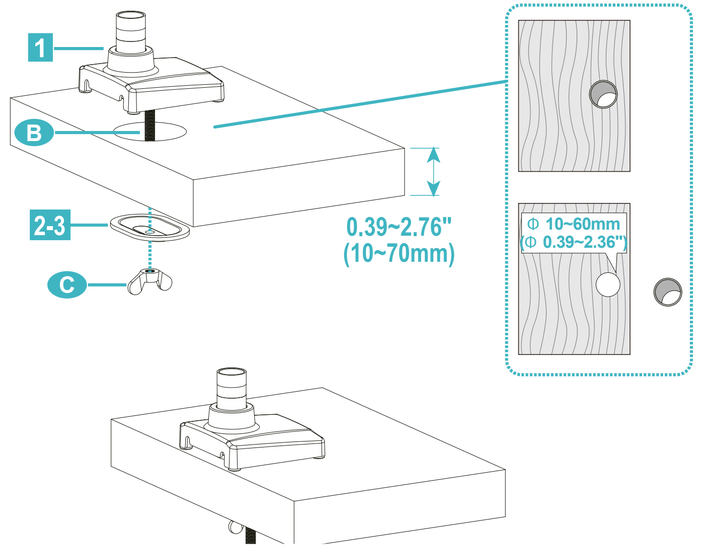



1b

# Attach VESA Plate to Monitor






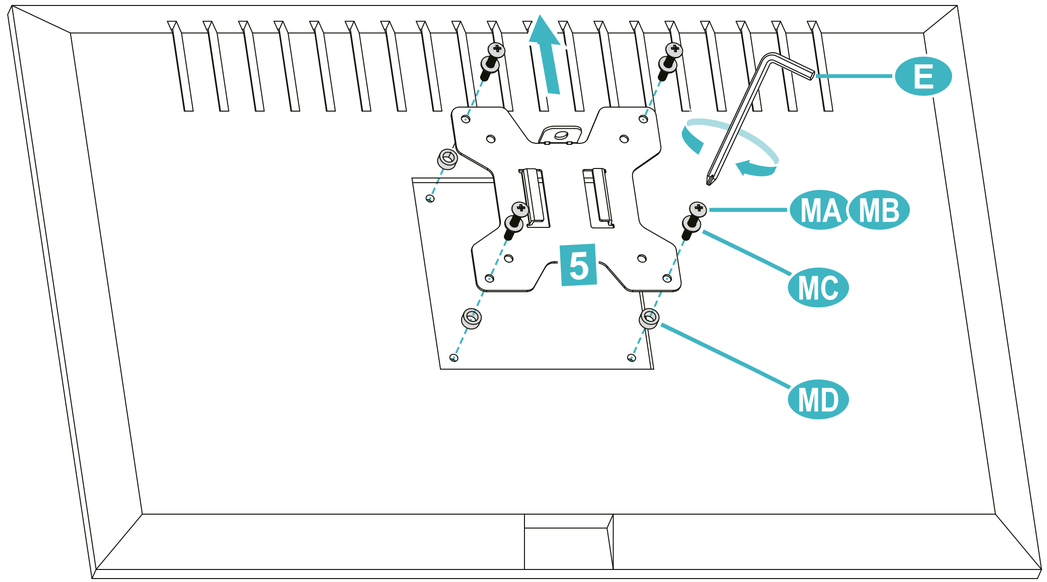
# Hang monitor

**Note:** Install the lower arm (3) and the upper arm (4) to the base (1). Secure the arm by tightening the inside screw using 4 mm Allen key (J).

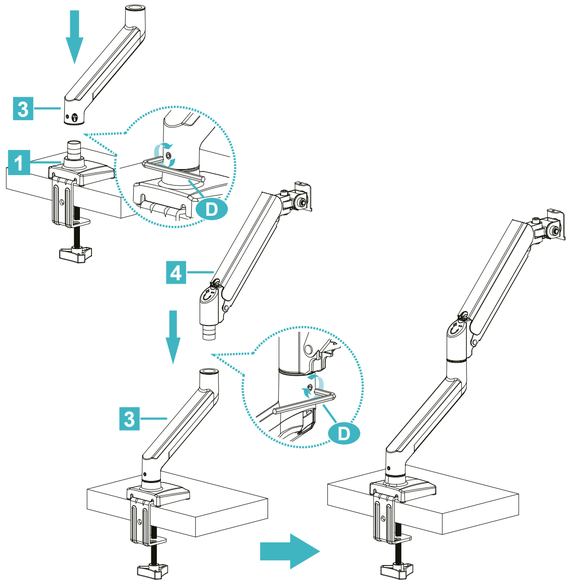



**Note:** Remove the pre-assembled security bolt from the arm (4). Slide the monitor onto the head or upper arm (4), install the security bolt.

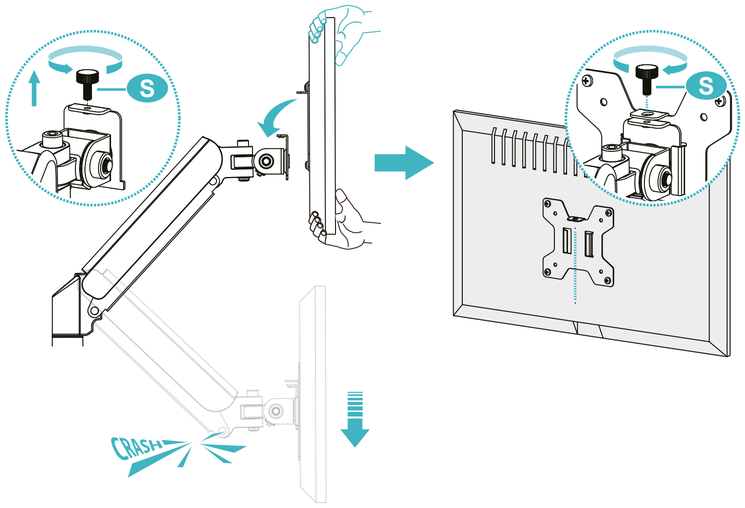


# Adjustements

**Note:** Loosen the tilting bolt. Then adjust monitor adjust monitor to your desired tilt angle. Finally retighten the tilting bolt.

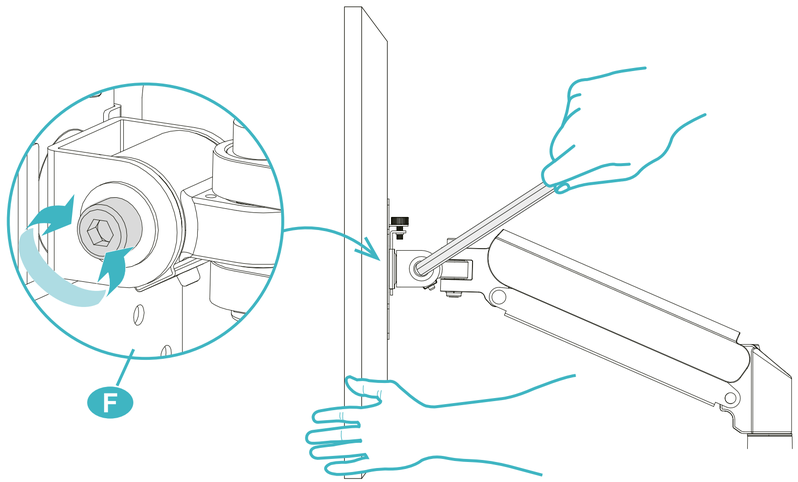




**Note:** The gas srping is pre-set to minimum tension. Depending on the weight of your actual monitor, you may need to adjust the tension of arm with 6mm Allen key.

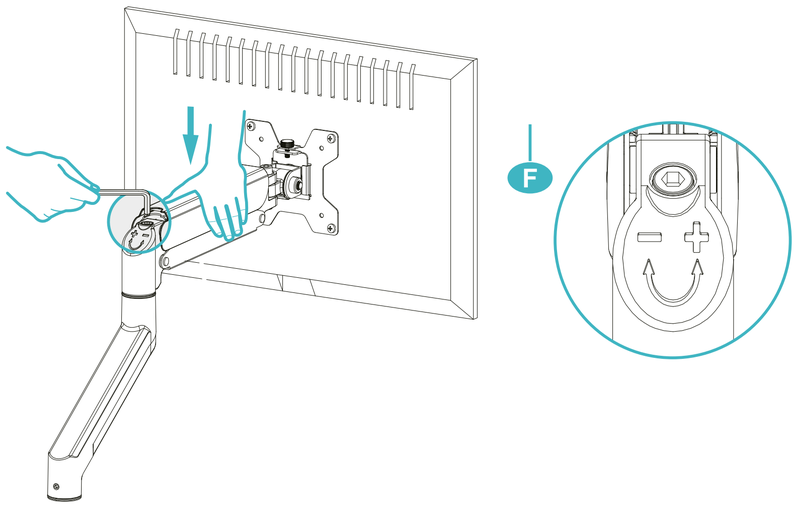

# Adjustements

**Note:** Please attach the monitor first, then hold the sides of it with both hands, and rotate vigorously. If that doesn't work out, please do not hesitate to ask for our help.

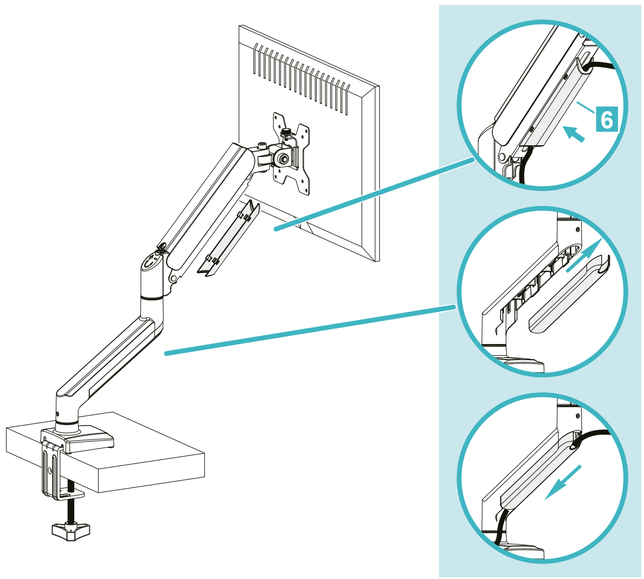

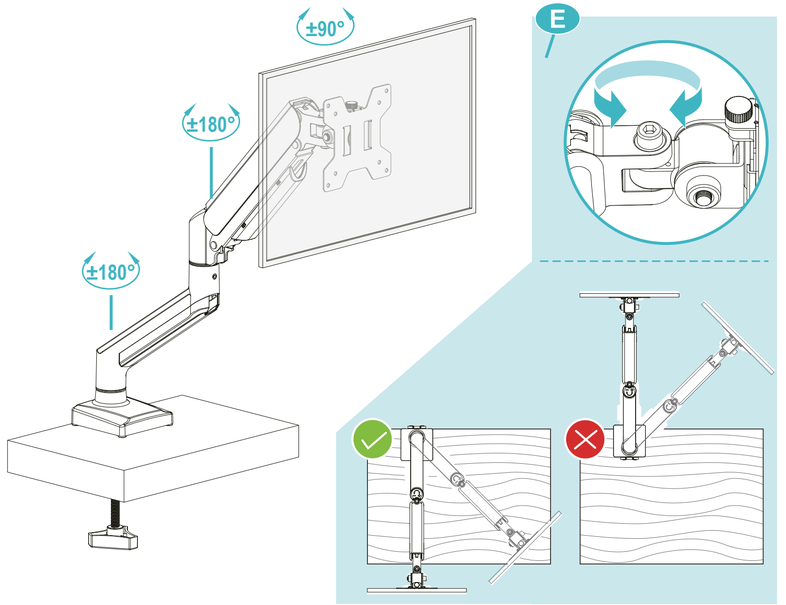
4b

EN

# Safety cautions



## Before assembly

- Please check and make sure all necessary accessories are included and undamaged.
- Please read and understand this manual carefully before installation.

## Warning

- This product contains small items that could be a choking hazard if swallowed. KEEP AWAY FROM CHILDREN UNDER 3 YEARS OLD. ADULT SUPERVISION IS REQUIRED.
- Improper installation, such as using the product for monitors over its load capacity or for capacity or for any purpose not explicity specified, may cause damage or serious injury. We would not be liable for any damage or injury caused by improper mounting or inappropiate use.

## Caution and maintenance

- Never allow children to climb, stand, hang or play on any part of monitor or stand.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
- Check that the bracket is secure and safe to use at regular intervals (at least every three months).

# Find out about all our news!

Follow us on social media

©2025 by TooQ Technology, S.L.
All Rights Reserved.
tooq.com