



# F9 PWM PST CO

## PWM PST Case Fan for Continuous Operation

- Japanese brand dual ball bearing provides a longer life span
- Ideal for continuous operation with exceptional stability
- Patented PWM Sharing Technology (PST)
- Extremely quiet with low noise impeller
- High airflow and static pressure



# F9 PWM PST CO

## PWM PST Case Fan for Continuous Operation

The **F9 PWM PST CO** fans aim to offer superior durability and cooling performance for demanding and continuous-operating PCs. With the patented PWM Sharing Technology (PST), the **F9 PWM PST CO** fans regulate the fan speed based on the actual needs with optimal cooling performance and noise control at all times.

### Specifications

Fan	92 mm, 550–1 800 RPM (Controlled by PWM)*
Airflow	43 CFM/73.1m³/h
Bearing	Dual Ball Bearing
Noise Level	0.4 Sone
Voltage/Current	0.16 A/12 V DC
Dimensions	92(L) x 92(W) x 25(H) mm
Weight	85 g


\*The minimum speed is tested based on a duty cycle of 20 %




### Airflow Directions





### PWM Plug Set (PST)



### Japanese Dual Ball Bearing



### Optimized for Continuous Operation

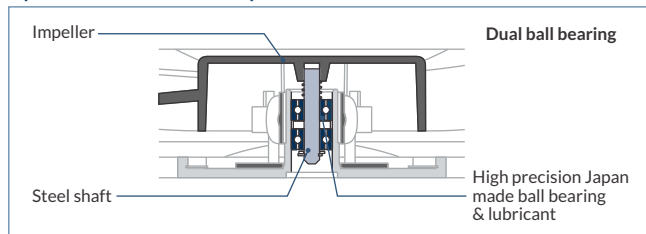

The PST ensures all PWM-controlled devices run at optimized speed (and hence lower noise level) based on actual CPU cooling demand.