


Yealink MeetingDisplay Datasheet

Display for unified MTR system

The MeetingDisplay is designed explicitly for the Yealink MTR system and can be paired with the MTR bar, UVC Camera, and MCore to provide the complete Yealink Meeting Solution. The MeetingDisplay is available in 55", 65", 75", and 86" sizes, meeting the needs of small, medium, and large meeting rooms. The MeetingDisplay and MTR devices can be deployed, managed, and integrated in a unified manner. You can mount these MTR system devices on the MeetingDisplay without drilling or damaging the walls. The installation process will also be simple and convenient based on our uniquely designed structure. Moreover, the meeting solution, led by the MTR system, can be centrally managed via YMCS/YDMP. Finally, this solution allows MeetingDisplay and MTR devices to work in sync, including sleep/wake-up, power on/off, and digital signage mode.

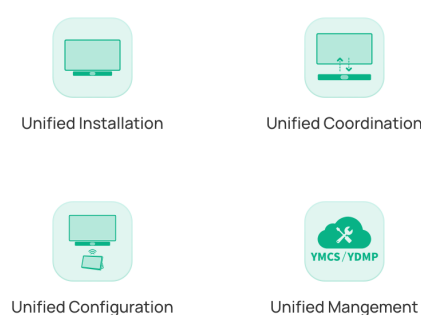

Key Features and Benefits

- Unified installation, the customised structure makes installation easy.
- Unified coordination supports digital signage, sleep, and wake-up functions.
- Unified management, manage MeetingDisplay and MTR device on one platform (YMCS or YDMP).
- Unified configuration, one-touch console is enough.

Unified Installation

Customized mounting brackets are designed to be embedded into the back of the MeetingDisplay, allowing the Yealink MeetingBar, UVC Camera, and MCore to be directly attached without wall drilling. The installation and deployment process is simple and convenient, requiring only the devices to be slotted into the pre-designed mounting structure. Each device can be installed in under 5 minutes. Additionally, the MeetingDisplay can also provide network connectivity to the Yealink MeetingBar and MCore.

Unified Coordination

This solution enhances user experience and efficiency by enabling seamless coordination between MeetingDisplay and MTR devices, ensuring automatic sleep/wake-up, power synchronization, and intelligent digital signage switching. It also reduces energy consumption, optimizes device utilization, and minimizes manual operations, providing a smarter and more cost-effective meeting environment.

Unified Configuration

You can configure the MTR device and MeetingDisplay uniformly through a touch console, including basic settings, brightness, audio, etc.

Unified Management

All meeting devices are managed through a unified platform, eliminating the hassle of managing multiple terminals and platforms. Devices like MeetingDisplay, MeetingBar, UVC Camera, and so on can all be managed through YMCS or YDMP, allowing customers to oversee various devices on a single platform. Also, as an accessory of the MTR system, the MeetingDisplay can be managed by the Yealink MTR Device regardless of whether it is connected to the network. All device status information is synchronized to the device management platform.

Technical Specifications

Parameter	Description
Display	- Screen Size - MeetingDisplay 55: 55 inch - MeetingDisplay 65: 65 inch - MeetingDisplay 75: 75 inch - MeetingDisplay 86: 86 inch - Display Type: IPS - Surface Treatment: Anti-glare Coating - Refresh Rate: 60 Hz - Grayscale Response Time: 8ms - Color Gamut: 72% NTSC - Colour Depth: 1.07G (10-bit) - Viewing Angle: 178°(H)/178°(V) - Contrast Ratio: 1200: 1 - Resolution: 3840 × 2160 - Brightness: 500 cd/m² - Haze: 25% - Operation Time: - MeetingDisplay 55: 7*24 h - MeetingDisplay 65: 7*18 h - MeetingDisplay 75: 7*18 h - MeetingDisplay 86: 7*18 h
Audio	Speaker: 12W × 2
Content sharing	- Wired screen sharing: - HDMI In - Wireless screen sharing: - AirPlay - Miracast - Wireless Presentation Pod (unavailable in the United States)
Hardware Interfaces	- Video: HDMI In 2.1 × 3 - Audio: 3.5mm Stereo Mini Jack (Output) - USB: USB-A 2.0 × 2, USB-B 2.0 × 1 - LAN: 2 × RJ45 10/100/1000M network ports - Control: RS232 × 1, IP Control (Via LAN) - Others: Reset × 1
Wireless	- WiFi: Wi-Fi 6 2.4G & 5G dual-band, 802.11a/b/g/n/ac/ax - Bluetooth: Bluetooth 5.1 - IR: Supported

Installation Methods	• Wall-mounted Installation • Floor-stand Installation
Packaging	• 1 × MeetingDisplay • 1 × Cable Pack • 1 × 3m AC power cable • 1 × 3m CAT5E network cable • 1 × Quick Start Guide • Cable ties • 1 × Remote Controller (IR) • 2 × AAA Batteries • 1 × MCore bracket (Compatible with MCore 4, MCore 4 is sold separately)
Optional Accessories	Mounting Accessories for MeetingDisplay: • Wall Mount Bracket ◦ MD-WallMount (Suitable for 55", 65", 75", and 86" MeetingDisplay) • Wall Stand Bracket ◦ MB-WallStand-650W (Suitable for 55" and 65" MeetingDisplay) ◦ MB-WallStand-860W (Suitable for 75" and 65" MeetingDisplay) • Floor Stand ◦ MB-FS-VESA (Suitable for 55", 65", 75", and 86" MeetingDisplay) 💡 When you purchase MeetingDisplay 55 and select MB-FS-VESA: 1. The cart cannot be used to mount MeetingDisplay 55 + MCore 4; 2. Please use the 8 mm washers from the MeetingDisplay 55 accessory kit to secure the rear VESA mounting holes to the cart's vertical brackets. • Motorized Mobile Stand: MB-FS-Lift Mounting Accessories for MVC Series & MeetingBar: • Mounting Bracket: ◦ MD-AVBracket- S: Compatible with MeetingBar A25, MeetingBar A40, SmartVision 40, MSpeaker Pro ◦ MD-AVBracket- L: Compatible with MeetingBar A50 ◦ MD-PTZBracket: Compatible with UVC86 Casting Accessories: • Wireless Presentation Pod (unavailable in the United States)
System Overview	• Operating System: Android 13 • Storage ◦ Memory: 4 G ◦ Flash: 32 G
Power	• Power Adapter: 100-240 V~50/60 Hz • Power Consumption ◦ MeetingDisplay 55 ■ Max: 138 W ■ Typical: 82 W ■ Off mode: less than 0.5 W ◦ MeetingDisplay 65 ■ Max: 210 W

	■ Typical: 183 W ■ Off mode: less than 0.5 W ○ MeetingDisplay 75 ■ Max: 215 W ■ Typical: 186 W ■ Off mode: less than 0.5 W ○ MeetingDisplay 86 ■ Max: 323 W ■ Typical: 268 W ■ Off mode: less than 0.5 W
Environmental Factors	• Operating Temperature: 0~40°C • Storage Temperature: -20~60°C • Operating Humidity: 10~95%
Warranty	• 3-year

Bracket Compatibility

Bracket	Device			
MD-WallMount (Needed to be purchased separately)	MeetingDisplay 55	MeetingDisplay 65	MeetingDisplay 75	MeetingDisplay 86
MD-AVBracket-S (Needed to be purchased separately)	MeetingBar A25	MeetingBar A40	SmartVision 40	MSpeaker Pro
MD-AVBracket-L (Needed to be purchased separately)	MeetingBar A50	S50		
MD-PTZBracket (Needed to be purchased separately)	UVC86	SmartVision 80		
MCore bracket (Included in the package)	MCore 4			

Suggested Bundle

Content	Optional Bracket
MeetingDisplay 55 + MeetingBar A25	• Wall-mounted Installation ○ MD-WallMount ○ MD-AVBracket-S • Mobile Stand Installation ○ MB-FS-Lift / MB-FS-VESA ○ MD-AVBracket-S
MeetingDisplay 55/65/75 + MeetingBar A40	• Wall-mounted Installation ○ MD-WallMount ○ MD-AVBracket-S • Mobile Stand Installation ○ MB-FS-Lift / MB-

	FS-VESA • MD-AVBracket-S
MeetingDisplay 55/65/75 + MVC S40	• Wall-mounted Installation • MD-WallMount • MD-AVBracket-S • MCore bracket (Included in the package) • Mobile Stand Installation • MB-FS-Lift / MB-FS-VESA[1] • MD-AVBracket-S • MCore bracket (Included in the package)  [1] MB-FS-VESA is not suitable for MeetingDisplay 55 + MVC S40.
MeetingDisplay 75/86 + MeetingBar A50	• Wall-mounted Installation • MD-WallMount • MD-AVBracket-L • Mobile Stand Installation • MB-FS-Lift / MB-FS-VESA • MD-AVBracket-L
MeetingDisplay 75/86 + MVC S50	• Wall-mounted Installation • MD-WallMount • MD-AVBracket-L • MCore bracket (Included in the package) • Mobile Stand Installation • MB-FS-Lift / MB-FS-VESA • MD-AVBracket-L • MCore bracket (Included in the package)
MeetingDisplay 86 + MVC S80/MVC 860	• Wall-mounted Installation • MD-WallMount

	◦ MD-PTZBracket ◦ MCore bracket (Included in the package) • Mobile Stand Installation ◦ MB-FS-Lift / MB-FS-VESA ◦ MD-PTZBracket ◦ MCore bracket (Included in the package)
MeetingDisplay 86 + MVC S80/MVC 860 + MSpeaker Pro	• Wall-mounted Installation ◦ MD-WallMount ◦ MD-PTZBracket or MD-AVBracket-S (MeetingDisplay is compatible with only one bracket) ◦ MCore bracket (Included in the package) • Mobile Stand Installation ◦ MB-FS-Lift / MB-FS-VESA ◦ MD-PTZBracket or MD-AVBracket-S (MeetingDisplay is compatible with only one bracket) ◦ MCore bracket (Included in the package)

Main Unit Dimensions and Weight

Parameter	MeetingDisplay 55	MeetingDisplay 65	MeetingDisplay 75	MeetingDisplay 86
Bare Device Dimensions (W × D × H)	1237 × 56 × 717 mm	1456 × 58 × 834 mm	1680 × 57 × 959 mm	1927 × 61 × 1099 mm
Packaging Dimensions (W × D × H)	1340 × 185 × 790 mm	1590 × 185 × 925 mm	1815 × 185 × 1055 mm	2065 × 215 × 1155 mm
In-Wall Depth (with MD-WallMount)	94 mm	94 mm	94 mm	97 mm
Net Weight	15.6 kg (34.39 lbs)	19.9 kg (43.9 lbs)	28.4 kg (62.6 lbs)	45.2 kg (99.6 lbs)

Gross Weight	21.6 kg (47.62 lbs)	28.2 kg (62.2 lbs)	38.7 kg (85.3 lbs)	58.7 kg (129.4 lbs)
VESA Hole Specs	400 × 400 mm	400 × 400 mm	600 × 400 mm	600 × 400 mm
VESA Mount Screw	M6	M8	M8	M8
Bezel Width	11.9/11.9/11.9/12.5 (L/R/U/D)	11.8/11.8/11.8/12.5 (L/R/U/D)	13/13/13/13.5 (L/R/U/D)	13/13/13/13.5 (L/R/U/D)
Quantity	1 unit/box	1 unit/box	1 unit/box	1 unit/box