


190x95mmmm



ITHUCHDPDCR2U3UC

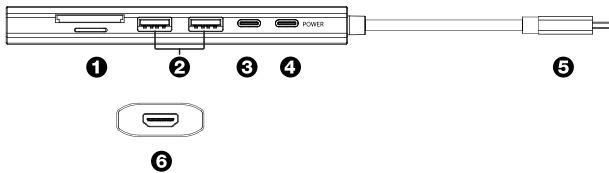

| Port | Description                                                                                                                                                                                          |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | SD Card / microSD Card<br>Insert an SD or microSD card into the respective port to access your photos, video and other media                                                                         |
| 2    | 2 x USB-A 3.0 Data Ports<br>Connect USB-A devices including keyboard/mouse, flash drives, a web cam, a printer or external storage devices to these high speed USB-A 3.0 ports at speeds up to 5Gbps |
| 3    | USB-C 3.0 Data & Charge<br>Connect USB-C devices including flash drives, a web cam or external storage devices to this high speed USB-C 5Gbps port                                                   |
| 4    | USB-C Power Port<br>Connect your laptop's USB-C power supply to this port to supply up to 90W of power pass through to your laptop                                                                   |
| 5    | USB-C Male<br>Connect this cable to a USB-C port on your laptop. The USB-C port must support DisplayPort Alternate Mode to display video and must support USB-C Power Delivery to charge your laptop |
| 6    | HDMI Port<br>Connect your HDMI monitor to this port. Maximum resolution is 3840 x 2160 @60Hz<br>• Computer's USB-C port must support DisplayPort 1.4                                                 |

#### Operation

It is recommended to use the USB-C multiport adapter with your computer's power supply connected to the USB-C Power Port. This will provide power to the multiport adapter while also providing power to charge your computer.

Connect the multiport adapter to your computer by plugging the USB-C male cable into a USB-C port on your computer. Connect your computer's power supply to the USB-C Power Port. This multiport adapter supports up to 90W of power pass through to the laptop and 5W for the adapter.

Connect your HDMI monitor to the HDMI Port. The maximum resolution supported is 3840 x 2160 @60Hz. This multiport adapter supports the following external display modes.

Duplicate or Extended mode in Windows  
Mirror or Extended mode in macOS  
Mirror or Unified Desktop mode in ChromeOs

Connect your USB-A and USB-C devices to the USB-A or USB-C data ports such as keyboard/mouse, USB flash drives, external storage devices, webcams or other USB peripherals. The maximum data transfer rate is 5Gbps.

You can also use the USB-A ports to charge your phone or other devices. The maximum power output of each USB port is 5V/1.5A (7.5W). The maximum total output of all USB ports is 13.5W shared. To charge a phone or large external storage device that consumes a large amount of power, the laptop's power supply must be connected to the multiport adapter.

#### Trouble Shooting

##### Monitor Not Working

This multiport adapter uses a technology called DisplayPort Alternate Mode (often referred to as DP Alt-Mode) to send video signals to connected monitors via USB-C. If the monitor connected to the multiport adapter is not working, the USB-C port on your computer may not support DP Alt-Mode.

Please check the specifications of your computer to see if it supports DP Alt-Mode via USB-C.

Even though all USB-C ports may look the same, computer manufacturers will usually label their USB-C ports to indicate if they support DP Alt-Mode. If the USB-C ports on your computer are not labelled, refer to the manual or the manufacturer's website for more information on whether your computer supports DP Alt-Mode.

##### Connection Issues

If you are experiencing connection problems, unplug and replug the USB-C multiport adapter or unplug and replug the connection that is experiencing problems.

If you are using one of the USB-A ports to charge your phone, or connect a large external storage device (or another USB device that consumes a large amount of power), you must connect your computer's power supply to the multiport adapter.

If the power supply is disconnected during use, all device connections will be lost for a few seconds before reconnecting. During this time, data can be lost.

Do not disconnect the power while transferring data to avoid data loss or corruption.

##### Multiport Adapter Temperature

During operation, the USB-C multiport adapter may become hot. This is a normal and should not be cause for concern.

To minimise heat, please use the multiport adapter on a desk or table in a well ventilated area.

