


CS1262

2-Port PS/2 DVI KVM Switch



Diagram

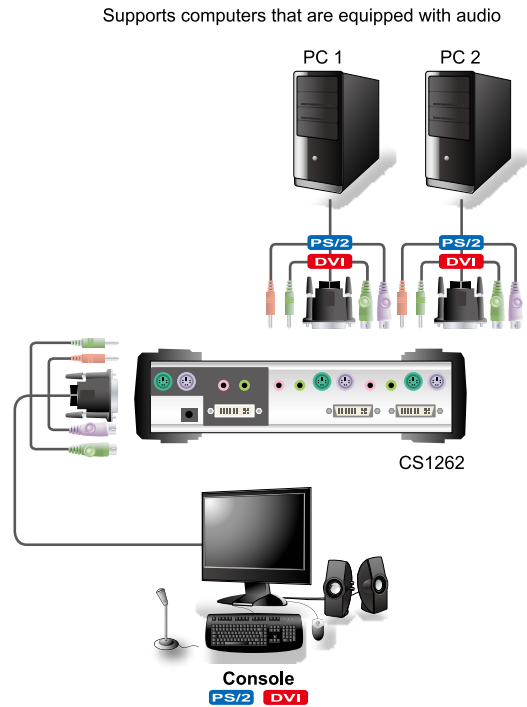

Features

- One PS/2 console controls 2 DVI computers
- Fully compliant with DVI-Digital and DVI-Analog specifications
- With speaker and microphone support
- Independent switching of KVM and audio focus
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality – 1920 x 1200; DDC2B
- Supports Microsoft IntelliMouse (Pro), Explorer, and Optical PS/2 mice
- Keyboard and mouse emulation for error-free booting
- Display Emulation Technology - stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution
- HDCP Compliant
- Auto Scan function to monitor computer operation

Specifications

Function		CS1262	
Computer Connections		2	
Port Selection		Hotkey, Pushbutton	
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x DVI Female (White)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
		Speaker	1 x Mini Stereo Jack Female (Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
		Keyboard	2 x 6-pin Mini-DIN Female (Purple)
	KVM Ports	Video	2 x DVI Female (White)
		Mouse	2 x 6-pin Mini-DIN Female (Green)
		Speaker	2 x Mini Stereo Jack Female (Green)
		Microphone	2 x Mini Stereo Jack Female (Pink)
	Power	1 x DC Jack	
	Switches	Port	2 x Pushbutton
		On Line	2 (Orange)
LEDs	Selected	2 (Green)	
	Emulation	Keyboard/ Mouse	PS/2
Video		1920 x 1200; DDC2B	
Scan Interval		1-99 Seconds	
Power Consumption		DC5.3V, 1.78W	
Environment	Operating Temp.	0-50°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	0.70 kg	
	Dimensions (L x W x H)	21.00 x 8.50 x 5.50 cm	

* The specifications and pictures are subject to change without notice.