




PHILIPS





Coreline Batten

BN124C

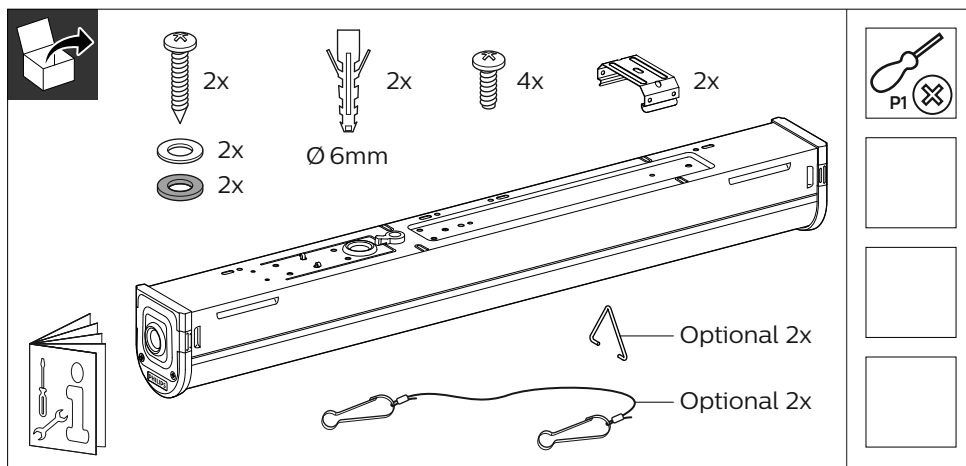


	P (W)	A(mm)	
BN124C LED21S/840 PSU TW1 L600	19	575	0.70
BN124C LED19S/830 PSU TW1 L600			
BN124C LED41S/840 PSU TW1 L1200	38	1175	1.45
BN124C LED38S/830 PSU TW1 L1200			
BN124C LED64S/840 PSU TW1 L1500	60	1475	1.70
BN124C LED60S/830 PSU TW1 L1500			

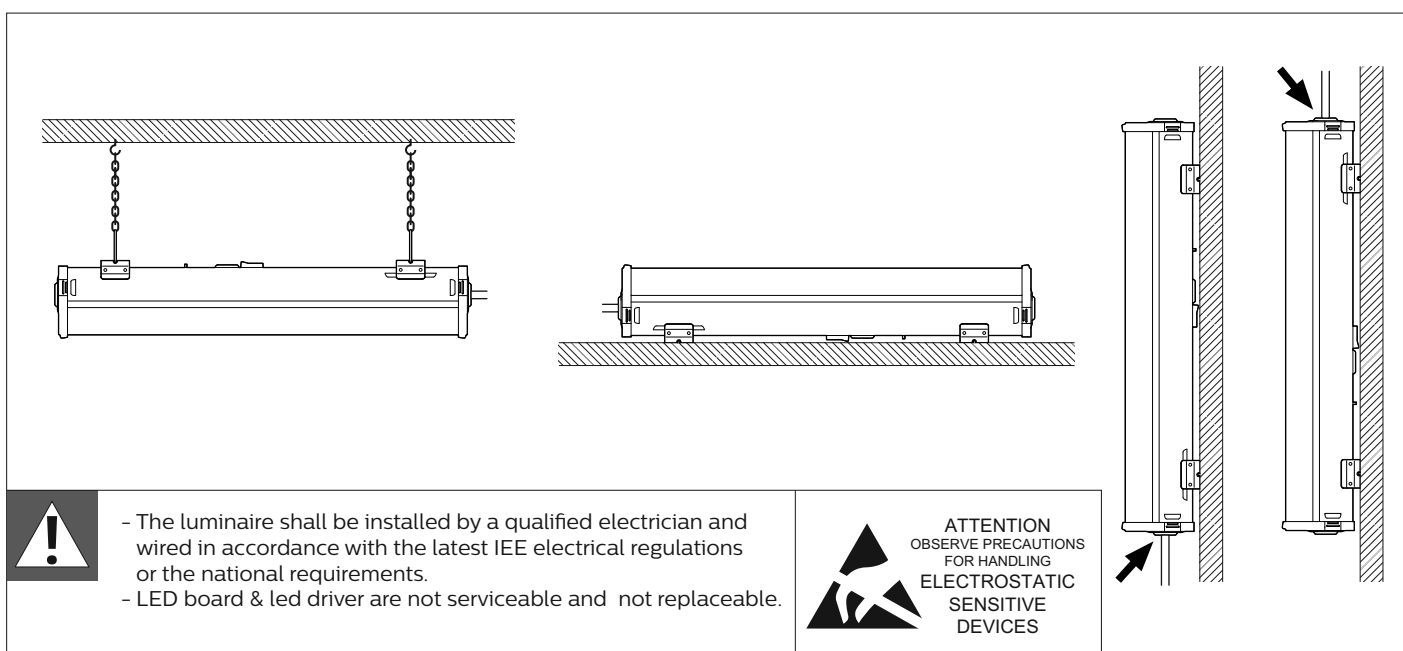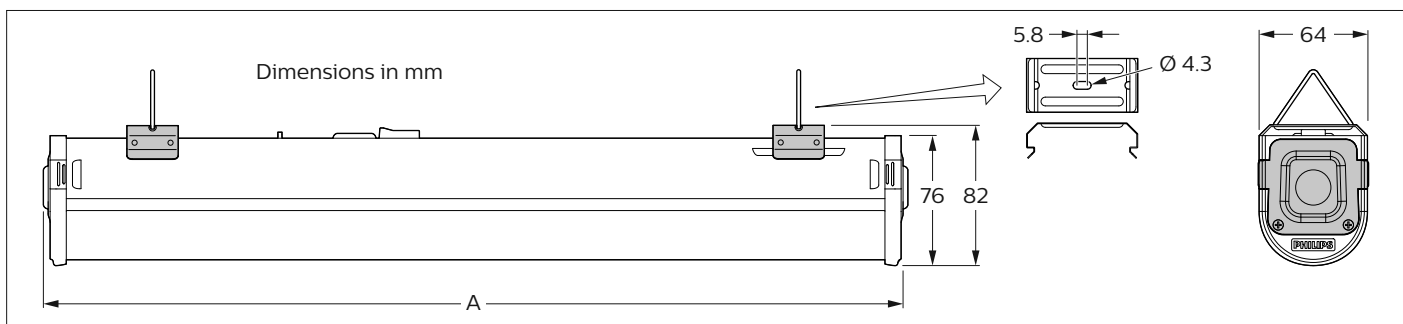

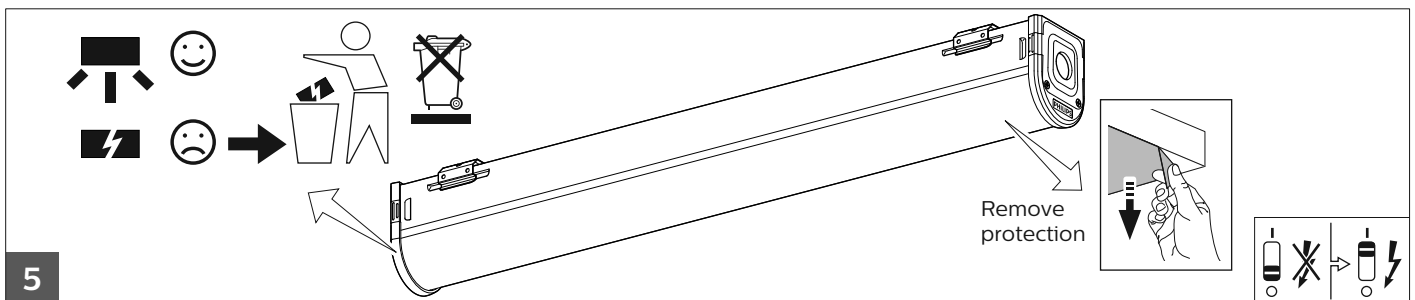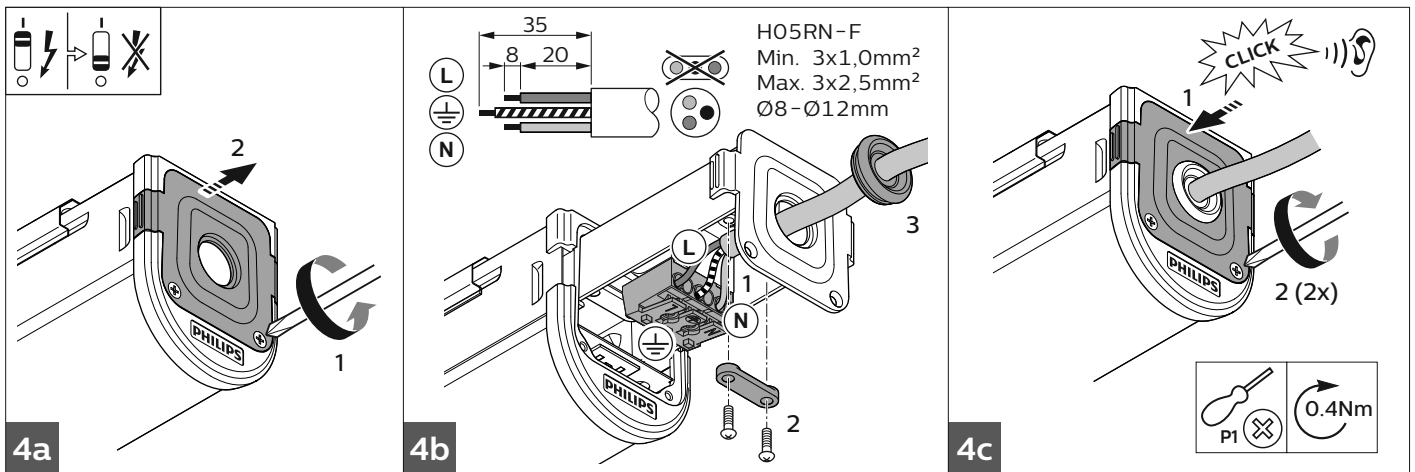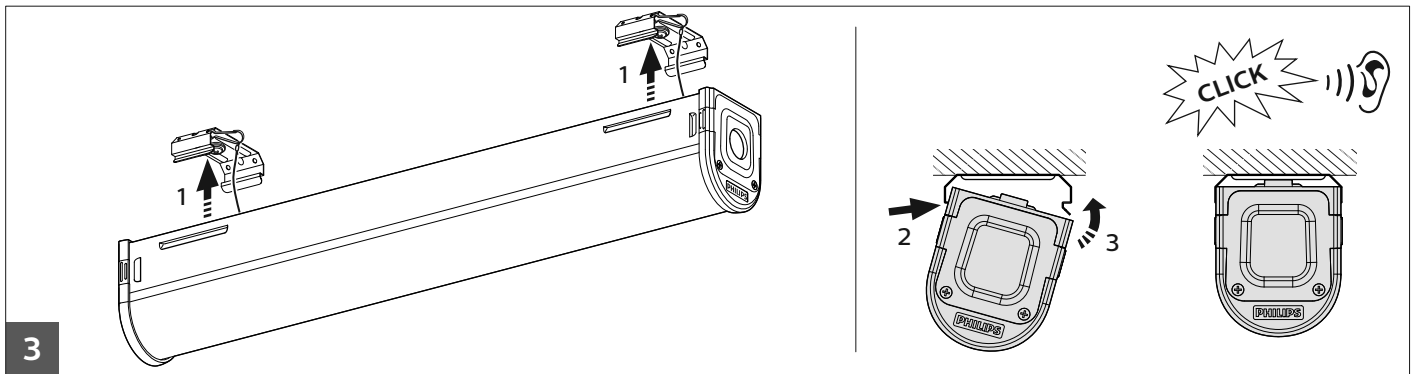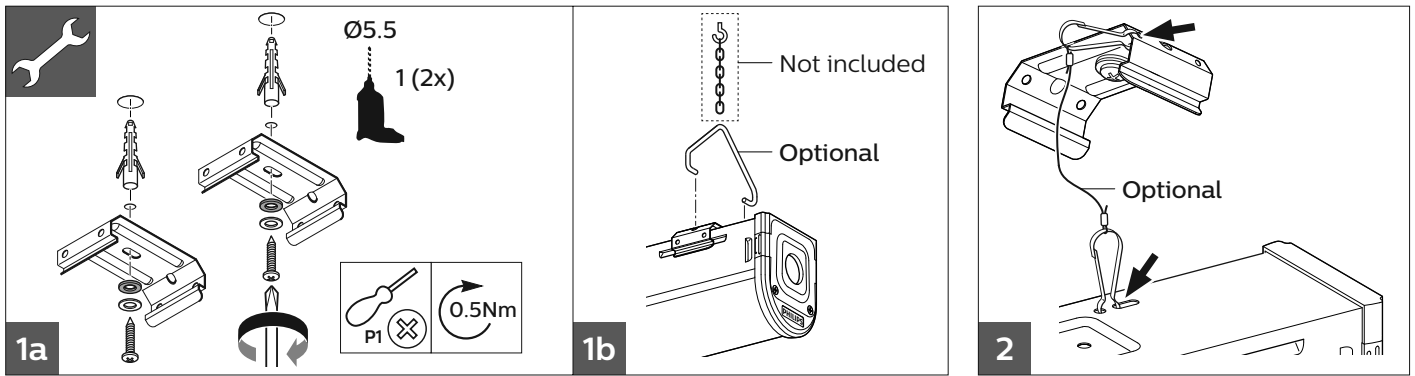

Inrush current

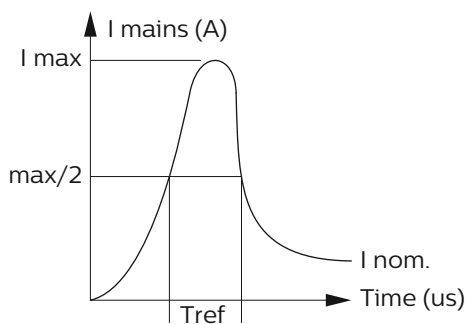

	LED20S L600	LED38S L1200	LED60S L1500
Electrical characteristics			
Inom (mA)	290	290	370
Imax (A)	8	8	8
Tref (µs)	60	60	60
MCB	Max. number of connected Luminaires		
B-10 A	15	15	15
B-16 A	24	24	24
C-10 A	24	24	24
C-16 A	40	40	40