

Dell G7 17 7700

Setup and Specifications



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Set up your Dell G7 17 7700	4
Chapter 2: Views of Dell G7 17 7700	6
Right.....	6
Left.....	6
Back.....	7
Base.....	8
Display.....	9
Bottom.....	10
Chapter 3: Specifications of Dell G7 17 7700	11
Dimensions and weight.....	11
Processor.....	11
Chipset.....	12
Operating system.....	12
Memory.....	12
External ports.....	13
Internal slots.....	13
Communications.....	14
Audio.....	14
Storage.....	15
Intel Optane memory.....	16
Media-card reader.....	16
Keyboard.....	17
Camera.....	17
Touchpad.....	18
Power adapter.....	18
Battery.....	19
Display.....	19
Fingerprint reader (optional).....	20
GPU—Integrated.....	20
GPU—Discrete.....	21
Operating and storage environment.....	21
Chapter 4: Keyboard shortcuts	22
Chapter 5: Getting help and contacting Dell	25

Set up your Dell G7 17 7700

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.

2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps


Resources	Description
	My Dell Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.
	SupportAssist Proactively checks the health of your computer's hardware and software. The SupportAssist OS Recovery tool troubleshoots issues with the operating system. For more information, see the SupportAssist documentation at www.dell.com/support .

Table 1. Locate Dell apps (continued)

Resources	Description
	 NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.
	Dell Update Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article SLN305843 at www.dell.com/support .
	Dell Digital Delivery Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article 153764 at www.dell.com/support .

Views of Dell G7 17 7700

Right

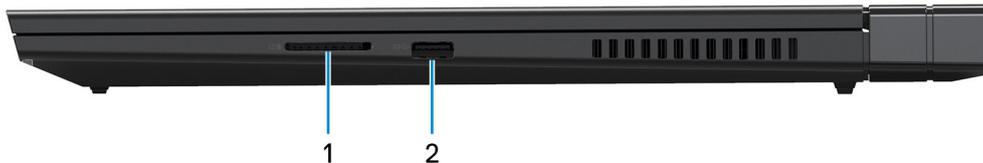

1. SD-card slot

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

Left



1. Power-adaptor port

Connect a power adapter to provide power to your computer and charge the battery.

2. Power and battery-status light/hard-drive activity light

Indicates the battery-charge status or the hard-drive activity.

i **NOTE:** Press Fn+H to toggle between the power and battery-status light, and hard-drive activity light.

Hard-drive activity light (for computers shipped with a hard drive)

Turns on when the computer reads from or writes to the hard drive.

Power and battery-status light

Indicates the power and battery-charge status.

Solid white — Power adapter is connected and the battery has more than 5% charge.

Amber — Computer is running on battery and the battery has less than 5% charge.

Off

- Power adapter is connected and the battery is fully charged.
- Computer is running on battery and the battery has more than 5% charge.

- Computer is in sleep state, hibernation, or turned off.

3. USB 3.2 Gen 1 port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

NOTE: If your computer is turned off or in hibernate state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.


NOTE: Certain USB devices may not charge when the computer is turned off or in sleep state. In such cases, turn on the computer to charge the device.

4. Headset port

Connect headphones or a headset (headphone and microphone combo).

Back

Computers shipped with NVIDIA GeForce GTX 1650 Ti

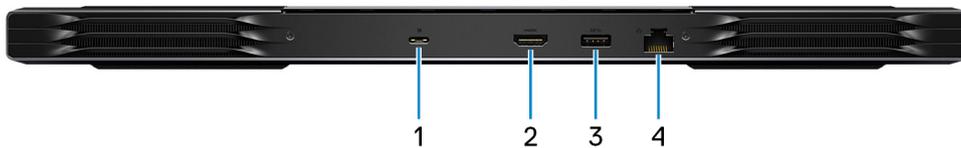

1. USB 3.2 Gen 2 Type-C port with DisplayPort

Connect peripherals such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports DisplayPort 1.4 and also enables you to connect an external display using a USB Type-C to DisplayPort adapter.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

2. HDMI port

Connect to a TV or another HDMI-in enabled device. Provides video and audio output.


3. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

Computers shipped with NVIDIA GeForce GTX 1660 Ti, RTX 2060, RTX 2070, or RTX 2070 Super

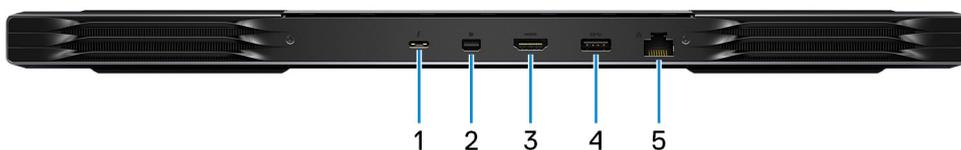

1. Thunderbolt 3 USB Type-C port

Connect peripherals such as external storage devices, printers, and external displays. Provides data transfer rate of up to 40 Gbps.

Supports DisplayPort 1.4 and also enables you to connect an external display using a USB Type-C to DisplayPort adapter.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

2. Mini DisplayPort

Connect to a TV or another DisplayPort-in enabled device. Provides video and audio output.

3. HDMI port

Connect to a TV or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

5. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

Base



1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two finger tap to right-click.

2. Left-click area

Press to left-click.

3. Right-click area

Press to right-click.

4. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

Display



1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Camera

Enables you to video chat, capture photos, and record videos.

3. Camera-status light

Turns on when the camera is in use.

4. Right microphone

Provides digital sound input for audio recording and voice calls.

5. Dynamic chassis light

Dynamic lighting that can be controlled using the Alienware Command Center.

Bottom



1. Left speaker

Provides audio output.

2. Right speaker

Provides audio output.

3. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

Specifications of Dell G7 17 7700

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell G7 17 7700.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	19.30 mm (0.76 in.)
Rear height	20.70 mm (0.81 in.)
Width	398.20 mm (15.68 in.)
Depth	290 mm (11.42 in.)
Weight (maximum)	3.29 kg (7.25 lb)  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.

Processor

The following table lists the details of the processors supported by your Dell G7 17 7700.

Table 3. Processor

Description	Option one	Option two	Option three
Processor type	10 th Generation Intel Core i5-10300H	10 th Generation Intel Core i7-10750H	10 th Generation Intel Core i9-10885H
Processor wattage	45 W	45 W	45 W
Processor core count	4	6	8
Processor thread count	8	12	16
Processor speed	Up to 4.5 GHz	Up to 5 GHz	Up to 5.3 GHz
Processor cache	8 MB	12 MB	16 MB
Integrated graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics

Chipset

The following table lists the details of the chipset supported by your Dell G7 17 7700.

Table 4. Chipset

Description	Values
Chipset	HM470
Processor	10 th Generation Intel Core i5/i7/i9
DRAM bus width	64-bit
Flash EPROM	24 MB
PCIe bus	Up to Gen3

Operating system

Your Dell G7 17 7700 supports the following operating systems:

- Windows 10 Home, 64-bit
- Windows 10 Professional, 64-bit

Memory

The following table lists the memory specifications of your Dell G7 17 7700.

Table 5. Memory specifications

Description	Values
Memory slots	Two SODIMM slots
Memory type	Dual-channel DDR4
Memory speed	2933 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	8 GB
Memory size per slot	4 GB, 8 GB, 16 GB
Memory configurations supported	<ul style="list-style-type: none">• 8 GB, 2 x 4 GB, DDR4, 2933 MHz, SODIMM, dual-channel• 16 GB, 2 x 8 GB, DDR4, 2933 MHz, SODIMM, dual-channel• 32 GB, 2 x 16 GB, DDR4, 2933 MHz, SODIMM, dual-channel

External ports

The following table lists the external ports of your Dell G7 17 7700.

Table 6. External ports

Description	Values
Network port	One RJ45 port
USB ports	<ul style="list-style-type: none"> One USB 3.2 Gen 1 port with PowerShare Two USB 3.2 Gen 1 ports One USB 3.2 Gen 2 Type-C port with Power Delivery and DisplayPort (only in computers shipped with NVIDIA GeForce GTX 1650Ti graphics card) One Thunderbolt 3 Type-C port (only in computers shipped with NVIDIA GeForce GTX 1660Ti, RTX 2060, RTX 2070, or RTX 2070 Super graphics card) <p>NOTE: Your computer supports either one USB 3.2 Gen 2 (Type-C) port with Power Delivery and DisplayPort or one Thunderbolt 3 port.</p>
Audio port	One headset (headphone and microphone combo) port
Video port	<ul style="list-style-type: none"> One HDMI 2.0 port One Mini DisplayPort 1.4 (only in computers shipped with NVIDIA GeForce GTX 1660Ti, RTX 2060, RTX 2070, or RTX 2070 Super graphics card)
Media-card reader	One SD-card slot
Docking port	Supported through USB Type-C port
Power-adaptor port	One 7.4 mm x 5.1 mm power-adaptor port
Security	Not supported

Internal slots

The following table lists the internal slots of your Dell G7 17 7700.

Table 7. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> One M.2 2230 slot for WiFi and Bluetooth combo card One M.2 2230/2280 slot for solid-state drive/Intel Optane memory <p>NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article SLN301626 at www.dell.com/support.</p>

Communications

Ethernet

Table 8. Ethernet specifications

Description	Values
Model number	<ul style="list-style-type: none"> Realtek RTL8111H Gigabit ethernet controller (only in computers shipped with NVIDIA GeForce GTX 1650Ti graphics card) Killer E2500V2 PCI-e Gigabit ethernet controller (only in computers shipped with NVIDIA GeForce GTX 1660Ti, RTX 2060, RTX 2070, or RTX 2070 Super graphics card)
Transfer rate	10/100/1000 Mbps

Wireless module

Table 9. Wireless module specifications

Description	Options			
Model number	Killer 1650i	Intel AX201	Intel 9560	Qualcomm QCA61x4A (DW1820)
Transfer rate	Up to 2400 Mbps	Up to 2400 Mbps	Up to 1733 Mbps	Up to 867 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP
Bluetooth	Bluetooth 5.1	Bluetooth 5.1	Bluetooth 5.0	Bluetooth 5.0

Audio

The following table lists the audio specifications of your Dell G7 17 7700.

Table 10. Audio specifications

Description	Values
Audio controller	Realtek ALC3281 with Nahimic 3D Audio for Gamers
Stereo conversion	Supported

Table 10. Audio specifications (continued)

Description		Values
Internal audio interface		Intel High-Definition Audio (HDA) via HDMI
External audio interface		Headset combo connector/Digital-array microphone input on camera module
Number of speakers		Two
Internal-speaker amplifier		Supported (audio codec built-in amplifier)
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output		Not supported
Microphone		Dual-array microphones

Storage

This section lists the storage options on your Dell G7 17 7700.

Your Dell G7 17 7700 supports various storage configurations, depending on the computer configuration ordered.

- If your computer is shipped with NVIDIA GeForce GTX 1650Ti graphics card, it has one of the following storage options:
 - One 2.5-inch hard drive (for computers shipped with 3-cell, 56 WHr battery)
 - One 2.5-inch hard drive and one Intel Optane Memory M10 (for computers shipped with 3-cell, 56 WHr battery)
 - One M.2 2230 or M.2 2280 solid-state drive (for computers shipped with 3-cell, 56 WHr or 6-cell, 97 WHr battery)

i NOTE: The solid-state drive is secured to the system board by a solid-state drive bracket that is specific to the form factor of the solid-state drive. If you are replacing a solid-state drive, ensure that the new solid-state drive has the same form factor. For example, replace an M.2 2280 solid-state drive with an M.2 2280 solid-state drive.
- If your computer is shipped with NVIDIA GeForce GTX 1660Ti, RTX 2060, RTX 2070, or RTX 2070 Super graphics card, it has one of the following storage options:
 - Up to two M.2 2230 solid-state drives
 - Up to two M.2 2280 solid-state drives
 - One M.2 2230 solid-state drive and one M.2 2280 solid-state drive

i NOTE: The solid-state drive is secured to the system board by a solid-state drive bracket that is specific to the form factor of the solid-state drive. If you are replacing a solid-state drive, ensure that the new solid-state drive has the same form factor. For example, replace an M.2 2280 solid-state drive with an M.2 2280 solid-state drive.

i NOTE: If you have ordered only one solid-state drive, it can be upgraded to the solid-state drive of the same form factor but an additional solid-state drive is not supported. If you have ordered two solid-state drives, they can be upgraded to the solid-state drives of the same form factor respectively.

The primary drive of your Dell G7 17 7700 varies with the storage configuration. For computers:

- with an M.2 solid-state drive, the M.2 solid-state drive is the primary drive
- without an M.2 solid-state drive, the 2.5-inch hard drive is the primary drive

Table 11. Storage specifications

Storage type	Interface type	Capacity
2.5-inch hard drive i NOTE: Applies only to computers shipped with NVIDIA GeForce GTX 1650Ti graphics card and 3-cell, 56 Wh battery)	SATA AHCI, up to 6 Gbps	Up to 2 TB
M.2 2230/2280 solid-state drive	PCIe Gen3 x4 NVMe	Up to 1 TB (M.2 2230) and 2 TB (M.2 2280)
M.2 2280 Intel Optane memory	PCIe Gen3 x2 NVMe	Up to 32 GB

Intel Optane memory

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

- i** **NOTE:** Intel Optane memory is supported on computers that meet the following requirements:
- 7th Generation or higher Intel Core i3/i5/i7 processor
 - Windows 10 64-bit version or higher (Anniversary Update)
 - Latest version of Intel Rapid Storage Technology driver

Table 12. Intel Optane memory

Description	Values
Type	Storage accelerator
Interface	PCIe 3.0x2
Connector	M.2 2280
Configurations supported	32 GB
Capacity	32 GB

Media-card reader

The following table lists the media cards supported by your Dell G7 17 7700.

Table 13. Media-card reader specifications

Description	Values
Media-card type	One SD card
Media-cards supported	<ul style="list-style-type: none"> • Secure Digital (SD) • Secure Digital High Capacity (SDHC) • Secure Digital Extended Capacity (SDXC)
i NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Keyboard

The following table lists the keyboard specifications of your Dell G7 17 7700.

Table 14. Keyboard specifications

Description	Values
Keyboard type	Four-zone RGB backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none">• United States and Canada: 103 keys• United Kingdom: 104 keys• Japan: 107 keys
Keyboard size	X=19.05 mm key pitch Y=19.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press the fn key and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p>

Camera

The following table lists the camera specifications of your Dell G7 17 7700.

Table 15. Camera specifications

Description	Values
Number of cameras	One
Camera type	HD RGB camera
Camera location	Front
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	74.9 degrees

Touchpad

The following table lists the touchpad specifications of your Dell G7 17 7700.

Table 16. Touchpad specifications

Description		Values
Touchpad resolution:		
	Horizontal	1349
	Vertical	929
Touchpad dimensions:		
	Horizontal	115 mm (4.53 in.)
	Vertical	80 mm (3.15 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows 10, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Dell G7 17 7700.

Table 17. Power adapter specifications

Description	Option one	Option two
Type	E4 130 W	E4 240 W
Connector dimensions:		
	External diameter	7.40 mm
	Internal diameter	5.10 mm
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)	<ul style="list-style-type: none"> • 1.80 A • 2.50 A 	3.50 A
Output current (continuous)	6.70 A	12.31 A
Rated output voltage	19.50 VDC	19.50 VDC
Temperature range:		
	Operating	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Dell G7 17 7700.

Table 18. Battery specifications

Description		Option one	Option two
Battery type		3-cell (56 Wh) "smart" lithium-ion	6-cell (97 Wh) "smart" lithium-ion
Battery voltage		11.40 VDC	11.40 VDC
Battery weight (maximum)		0.24 kg (0.53 lb)	0.34 kg (0.75 lb)
Battery dimensions:			
	Height	7.20 mm (0.28 in.)	7.20 mm (0.28 in.)
	Width	71.80 mm (2.83 in.)	71.80 mm (2.83 in.)
	Depth	223.20 mm (8.79 in.)	330.50 mm (13.01 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) <i>i</i> NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		<ul style="list-style-type: none"> 4 hours (when the computer is off) 2 hours (ExpressCharge) 	4 hours (when the computer is off)
Coin-cell battery		CR2032	CR2032

Display

The following table lists the display specifications of your Dell G7 17 7700.

Table 19. Display specifications

Description		Option one	Option two
Display type		Full High Definition (FHD)	Full High Definition (FHD)
Display-panel technology		Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)
Display-panel dimensions (active area):			
	Height	214.81 mm (8.46 in.)	214.81 mm (8.46 in.)
	Width	381.99 mm (15.04 in.)	381.99 mm (15.04 in.)

Table 19. Display specifications (continued)

Description		Option one	Option two
	Diagonal	438.16 mm (17.25 in.)	438.16 mm (17.25 in.)
Display-panel native resolution		1920 x 1080	1920 x 1080
Luminance (typical)		300 nits	300 nits
Megapixels		2.07	2.07
Color gamut		72% NTSC (Typical)	72% NTSC (Typical)
Pixels Per Inch (PPI)		127	127
Contrast ratio (min)		600 : 1	600 : 1
Response time (typ)		25 ms	19 ms
Refresh rate		60 Hz	144 Hz
Horizontal view angle		+/- 85 degrees	+/- 85 degrees
Vertical view angle		+/- 85 degrees	+/- 85 degrees
Pixel pitch		0.1989 mm	0.1989 mm
Power consumption (maximum)		8 W	8.50 W
Anti-glare vs glossy finish		Anti-glare	Anti-glare
Touch options		No	No

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell G7 17 7700.

Table 20. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	80 x 64

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell G7 17 7700.

Table 21. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel UHD Graphics	HDMI 1.4 port	Shared system memory	10 th Generation Intel Core i5/i7/i9

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Dell G7 17 7700.

Table 22. GPU—Discrete

Controller	External display support	Memory size	Memory type
NVIDIA GeForce GTX 1650 Ti	HDMI 2.0 port	4 GB	GDDR5
NVIDIA GeForce GTX 1660 Ti	<ul style="list-style-type: none"> HDMI 2.0 port Mini DisplayPort 1.4 port 	6 GB	GDDR6
NVIDIA GeForce RTX 2060	<ul style="list-style-type: none"> HDMI 2.0 port Mini DisplayPort 1.4 port 	6 GB	GDDR6
NVIDIA GeForce RTX 2070	<ul style="list-style-type: none"> HDMI 2.0 port Mini DisplayPort 1.4 port 	8 GB	GDDR6
NVIDIA GeForce RTX 2070 Super	<ul style="list-style-type: none"> HDMI 2.0 port Mini DisplayPort 1.4 port 	8 GB	GDDR6

Operating and storage environment

This table lists the operating and storage specifications of your Dell G7 17 7700.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 23. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3,048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

Function keys

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press **Shift** and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys **F1** to **F12** at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing **F3** mutes the audio (refer to the table below).

However, if the function keys **F1** to **F12** are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F3**.

NOTE: You can also define the primary behavior of the function keys (**F1** to **F12**) by changing **Function Key Behavior** in the BIOS setup program.

Table 24. List of keyboard shortcuts

Function key	Redefined key (for multimedia control)	Behavior
 F2	fn +  F2	Toggle between enabling and disabling wireless connection
 F3	fn +  F3	Toggle between muting and unmuting audio
 F4	fn +  F4	Decrease volume
 F5	fn +  F5	Increase volume
 F6	fn +  F6	Toggle between enabling and disabling the Windows key
 F7	fn +  F7	Toggle between turning keyboard backlight on and off
 F8	fn +  F8	Switch to external display
 F9	fn +  F9	Decrease brightness
 F10	fn +  F10	Increase brightness

Table 24. List of keyboard shortcuts (continued)

Function key	Redefined key (for multimedia control)	Behavior
	 + 	Toggle between enabling and disabling the touchpad

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 25. List of keyboard shortcuts

Function key	Behavior
 + 	Print screen
 + 	Insert
 + 	Toggle between power and battery-status light/hard-drive activity light
 + 	Toggle between scroll lock on and scroll lock off
 + 	Toggle between Break and Pause
 + 	Initiate system request
 + 	Open application menu
 + 	Toggle between locking and unlocking the fn key
 + 	Open the Emoji window

G key

Table 26. G key

Function key	Behavior
	Toggle between Windows power settings and the thermal setting for optimal gaming performance.

Macro keys

Macro keys can be configured to execute different gaming tasks.

Table 27. List of macro keys

Keys	Description
	<p data-bbox="807 423 932 450">Macro keys</p> <p data-bbox="807 454 1489 517">NOTE: You can configure modes and assign multiple tasks to the macro keys on the keyboard.</p>
	
	
	

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 28. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag for your Dell Laptop .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.