



ProDVX GM-75

Instruction manual

PRO DVX

www.prodvx.com

ProDVX GM-75


Glass Mount

Thank you for choosing the ProDVX GM-75 Glass Mount. This is a step-by-step instruction manual to successfully install the ProDVX GM-75 Glass Mount for your 10" display. The ProDVX GM-75 Glass Mount contains the following parts:



- 1 x Glass Mount Cover Sticker
- 1 x ProDVX GM-75 Mount frame
- 2 x adhesive strips
- 4 x short VESA screws
- 2 x safety screws

Please contact support@prodvx.com if you need additional support.

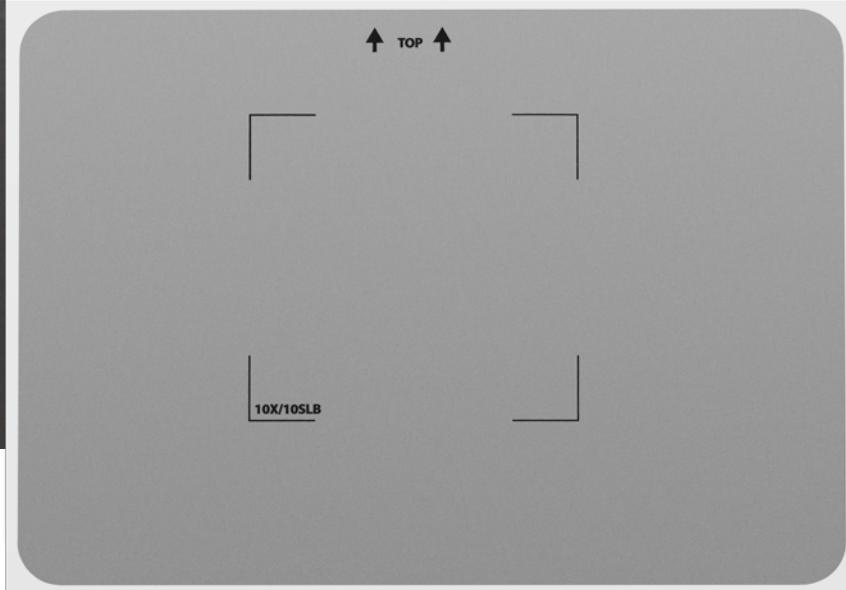


Applying the Glass Mount Cover Sticker

1. Clean the surface, preferably with Pro-Screen Cleaner spray.
2. Affix the Glass Mount Cover Sticker to the glass where the tablet will be placed.
3. Use a solid straight item to even out the Glass Mount Cover Sticker.
4. Even out big bubbles with the straight item (little bubbles will disappear in time).
5. Gently pull down the paper from the front side.
6. Clean the Glass Mount Cover Sticker with Pro-Screen Cleaner spray and let it dry for three minutes.



Mounting your device

7. Add the two adhesive strips **horizontally** to the **backside** of the ProDVX GM-75 Mount frame and remove the yellow paper from the two adhesive strips.
8. Firmly press the ProDVX GM-75 Mount frame onto the Glass Mount Cover Sticker and hold for ten seconds. Let the adhesive tape bond for 2-3 hours*.
9. Screw the four VESA screws into your 10" display's VESA holes. Tighten the screws by hand as they should stick out a few mm for affixing into the keyholes.
10. Align the screws on the back of the tablet with the four large keyholes on the ProDVX GM-75 Mount frame and slide from left to right until you hear a click!
11. Insert the two included safety screws into the top of the mounting plate. This will lock the mounting screws into place.

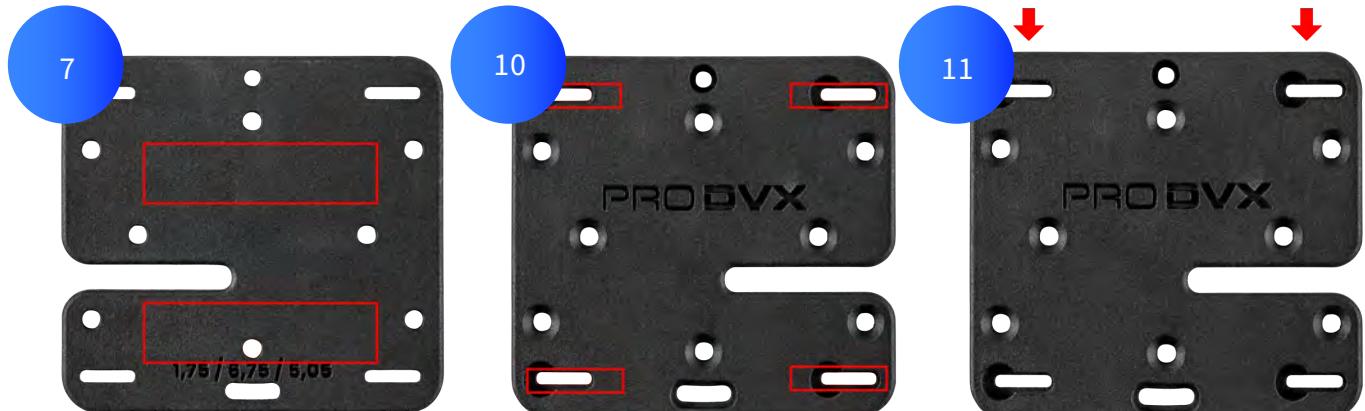

*At room temperature it takes at least 20 minutes before 50% of the total strength has been reached. After 24 hours, the strength should be around 90% and it will take approx. 72 hours before 100% strength is reached. We recommend to wait at least a couple of hours before mounting the display. (Best is to wait a day.)