



HP LaserJet Pro 3002dw Printer

Get fast printing speeds and easy management tools with LaserJet Pro.

This printer is built for powerful productivity with fast speeds and reliable hardware, delivering effortless everyday use from wherever work happens so you can focus more on your business.



This printer is intended to work only with cartridges that have a new or reused HP chip, and it uses dynamic security measures to block cartridges using a non-HP chip. Periodic firmware updates will maintain the effectiveness of these measures and block cartridges that previously worked. A reused HP chip enables the use of reused, remanufactured, and refilled cartridges. More at: <http://www.hp.com/learn/ds>

Основни теми

- Fast print speed (33 ppm A4)
- High monthly duty cycle (50,000 pages)
- Automatic two-sided printing standard
- HP Smart app
- HP Wolf Pro security
- Dual-band WiFi®, Bluetooth® LE, WiFi® Direct



2-sided printing



Ethernet

Powerful productivity

- Support your small workteams with this laser printer, designed for up to 7 users.
- Print more efficiently. You can save time, paper, and costs with duplex speeds at 35 ppm.¹
- Get productivity in the palm of your hand. Print and save time with Shortcuts from HP Smart.²

Seamless management

- Centralise your print management. HP Web Jetadmin makes it easy with its suite of features.³
- Set up your printers quickly. Streamlined setup makes it easy to set up and get back to business.
- Avoid interruptions with Wi-Fi® that intelligently looks for the best connection to stay on-line.⁴

HP Wolf Pro Security

- Get printer security out of the box. Preconfigured settings mean it's ready when you are.
- Add a layer of security. PIN/pull option authenticates your print jobs only when you're present.
- Set configuration policies and validate settings universally with HP JetAdvantage Security Manager.⁵


Sustainable printing

- Save up to 20% energy. EcoSmart toner with JetIntelligence balances premium quality with sustainability.⁶
- Start saving paper right out of the box. The default duplex setting prints on both sides to cut usage in half.
- Meet the industry standard for efficiency with Energy Star rating.⁶
- Reduce your footprint. HP Auto-On/Auto-Off technology optimizes printer energy usage and costs.⁷

Преглед на продукта

HP LaserJet Pro 3002dw Printer shown

- 1. Fast printing, up to 33 ppm, 250-sheet standard paper capacity
- 2. Built for the small workteams of up to 7 users
- 3. Automatic 2-sided printing
- 4. Pre-configured security settings
- 5. High-speed USB ports, built-in fast Ethernet
- 6. Cassette type input tray

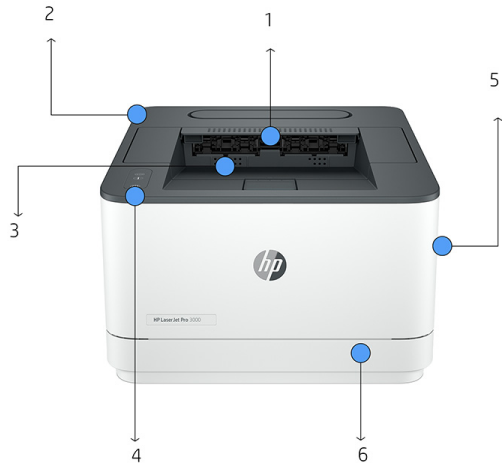

Принадлежности, консумативи and поддръжка

Консумативи	W1390A HP 139A Black Original LaserJet Toner Cartridge (Average cartridge yields 1,500 standard pages. Declared yield value in accordance with ISO/IEC 19752.)
	W1390X HP 139X High Yield Black Original LaserJet Toner Cartridge (Average cartridge yields 4,000 standard pages. Declared yield value in accordance with ISO/IEC 19752.)
Акcesoари	
Сервиз и поддръжка	UH761E 3 years Advanced Exchange (All EMEA countries Except Adriatic, Africa, CIS, EEM, Israel, Middle East, Russia, South Africa, Turkey)
	UH757E 3 years Next Business Day exchange (available in Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Spain, Sweden, Switzerland, UK)
	UH764E 3 years Return to Depot (available in Adriatic, Africa, CIS, EEM, Israel, Middle East, Russia, South Africa, Turkey)

Технически спецификации

Модел	HP LaserJet Pro 3002dw Printer
Номер на продукт	3G652F
Функции	Print
Контролен панел	4 Buttons (ON, Wireless, Info, Cancel/Resume); 3 Indicator LEDs (Paper, Attention, Toner).
Печат	
Технология на печат	Laser
Скорост на печат ¹	черно (A4, нормален режим): Up to 33 ppm ; черно (A4, двустранно): Up to 20 ipm
Разпечатване на първа страница ²	Черно (A4, готово): As fast as 7.0 sec ; черно (A4, режим Sleep): As fast as 8.7 sec
Разделителна способност при печат	Черно (най-добро качество): Up to 1200 x 1200 dpi ; Технология: 600dpi with Resolution Enhancement technology (RET); HP ProRes 1200
Месечно натоварване	Up to 50,000 A4; Препоръчителен месечен обем страници: 350 to 2500 pages
Интелигентни софтуерни функции на принтер	Automatic duplex, Easy OOBЕ, Smart security, Print always work, Print anywhere
Стандартни езици на печат	PCL5c; PCL6; PS; PCLmS; PDF; URF; PWG; PCLm
Шрифтове и начини на изобразяване	84 scalable TrueType fonts
Печатаема площ	полета на печат горно: 4.23 mm, Долно: 4.23 mm, ляво: 4.23 mm, дясно: 4.23 mm; Максимална област за печат : 207 x 348 mm
Двустранно печатане	Automatic (standard)
Скорост на процесора	800 MHz
Свързване	
Стандартни	Hi-Speed USB device (compatible with USB 2.0 specifications); 10/100Mbps Ethernet; Wireless 802.11b/g/n, Dual band 2.4GHz/5GHz; BLE.
Способност за мобилен печат	HP Smart App; Apple AirPrint™; Mopria™ Certified; Wi-Fi® Direct printing
Поддържани мрежови протоколи	TCP/IP; IPv4; IPv6; IP Direct Mode; LPD; SLP; Bonjour; WS-Discovery; BOOTP/ DHCP/ AutolP; WINS; SNMP v 1/2/3; and HTTP/HTTPS
Мрежови възможности	10/100Mbps Ethernet; Wireless 802.11b/g/n, Dual band 2.4GHz/5GHz.
Памет	Стандартни: 256 MB ;Максимална: 256 MB
Третиране на носителите	
Брой тави за хартия	Стандартни: 1 ;Максимална: 1 Main Tray
Видове носители	Paper (Cut sheets, plain, glossy film, labels), envelopes, card stock, postcards
Размер на носителя	По избор (см): Width 76 to 216 mm ; Length 127 to 356mm Поддържани (см): A4, A5, A5-R, A6, B5(JIS); B6(JIS); Oficio (216x340); 16K (195 x 270 mm); 16K (195 x 270 mm); 16K (197 x 273 mm); L 9x13 cm; 10x15cm; Japanese Postcard; Double Japan Postcard Rotated; Japanese Envelope Chou #3; Japanese Envelope Chou #4; Envelope B5; Envelope C5; Envelope C6; Envelope DL

Модел	HP LaserJet Pro 3002dw Printer
Номер на продукт	3G652F
Третиране на носителите	Стандартен вход: 1 main tray; 250 sheets or 10 envelopes Стандартен изход: 150-sheet output tray
Тегло на носителя	60 to 163 g/m ²
Входен капацитет	Тава 1: Sheets: up to 250; Envelopes: up to 10 Максимална: Up to 250 sheets
Изходен капацитет	Стандартни: Up to 150 sheets Пликове: Up to 10 Максимална: Up to 150 sheets
Съвместими операционни системи	Microsoft® Windows® 11, 10, 7 SP1: 32-bit or 64-bit, 2 GB available hard disk space, Internet connection, Microsoft® Internet Explorer or Edge. Apple® macOS v10.15 Catalina, macOS v11 Big Sur, macOS v12 Monterey;; 2 GB HD; Internet required; Linux (For more information, see https://developers.hp.com/hp-linux-imaging-and-printing)
Съвместими мрежови операционни системи	Windows Server 2008 R2 64-bit, Windows Server 2008 R2 64-bit (SP1), Windows Server 2012 64-bit, Windows Server 2012 R2 64-bit, Windows Server 2016 64-bit, Linux- For more information see http://developers.hp.com/hp-linux-imaging-and-printing .
Минимални системни изисквания	Windows: Microsoft® Windows® 11, 10, 7 SP1: 32-bit or 64-bit, 2 GB available hard disk space, Internet connection, Microsoft® Internet Explorer or Edge. Mac: Apple® macOS v10.15 Catalina, macOS v11 Big Sur, macOS v12 Monterey; 2 GB HD; Internet required
Включен софтуер	No CD in box; Downloadable Software from http://www.hp.com , http://www.hp.com , http://www.hpsmart.com/setup , in-OS app stores.
Управление на сигурността	Password-protected network embedded Web server; enable/disable Network ports; SNMPv1 community password change; 802.1x authentication
Управление на принтера	HP Smart, HPSM, Web JetAdmin, admin.hpsmart.com
Размери и тегло	
Размери на принтер (Ш x Д x В)	Минимум 367.0 x 398.2 x 216.2 mm; Максимална: 367.0 x 758.8 x 366.1 mm
Тегло на принтер	7.5 Kg
Операционна среда	Температура: 15 to 32.5°C Влажност: 30 to 70% RH
Условия на съхранение	Температура: -20 to 60°C
Акустика	Излъчвана акустична мощност: 6.5 B(A) (printing at 33ppm) Емисии на акустично налягане: 53 dB(A)
Захранване	Изисквания: 110-volt input voltage: 110 to 127 VAC (+/- 10%), 60 Hz/50 Hz; 220-volt input voltage: 220 to 240 VAC (+/- 10%), 60 Hz/50 Hz; Консумация: 484 watts (active printing), 2.93 watts (ready), 1.06 watts (sleep), 0.06 watts (Manual off), 0.06 watts (Auto Off/Manual On), 0.9 watts (Auto Off/Wake on LAN); Тип захранване: Internal (Built-in) power supply
Сертификати	RCM (Australia), TUV and GS Mark (Germany), BSMI (Taiwan), CCC (China), BIS (India), KC (South Korea), SIRIM (Malaysia), Cambodia, Ukraine, EAC, Eastern European approvals, CE Marking, FCC, Energy Star, UL, Paraguay, Chile, Argentina, Indonesia, Singapore, Philippines, etc. Стандарт за електромагнитно излъчване: CISPR32:2012 & CISPR32:2015 /EN55032:2012 & EN55032:2015+AC:2016 - Class B; EN 61000-3-2:2014; EN 61000-3-3:2013; EN 55035:2017; FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 6 Съвместим с Blue Angel Yes, Blue Angel DE-UZ 219—only ensured when using Original HP supplies Съвместимост с телекомуникации: Wireless: EU RED 2014/53/EU; EN 301 489-1 V2.2.3 / EN 301 489-17: V3.2.0; EN 300 328: V2.1.1 / EN301 893 V2.1.1; FCC Title 47 CFR, Part 15 Subpart C & E / RSS 247 Issue 1, 2015 & RSS 102 Issue 5, 2015; IEC 62311:2007 / EN62311:2008.
Спецификации на устойчивото въздействие	Mercury free
Страна на произход	Made in Vietnam
Какво има в кутията ³	3G652F HP LaserJet Pro 3002dw Printer; HP Black LaserJet Toner Introductory Cartridge (yield ~1000 pages); Setup Guide; Reference Guide; Regulatory Flyer; Warranty Guide; Power cord
Гаранция	One year limited warranty. Warranty and support options vary by product, country and local legal requirements.

Бележки под линия

¹ Measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity.

² Requires HP app download available at www.hp.com/go/mobileprinting. Certain features are available in English language only, and may vary by printer model/country, and between desktop/mobile applications. HP reserves the right to introduce charges for use of functionality facilitated by the HP app. Internet access required and may not be available in all countries. HP account required for full functionality. Fax capabilities are for sending a fax only. List of supported operating systems available in app stores. See details at www.hpsmart.com.

³ HP Web Jetadmin is available for download at no additional charge at hp.com/go/webjetadmin.

⁴ Internet access required and must be purchased separately. Wireless operations are compatible with 2.4 GHz and 5.0 GHz operations only. Supports both 5.0 GHz and 2.4 GHz using up to 12 non-overlapping channels vs. only 3 non-overlapping channels for 2.4 GHz only. Supports 5.0 GHz band (up to 150 mbps) v. 2.4 GHz band (up to 72.2 mbps). Learn more at: www.hp.com/go/mobileprinting

⁵ HP JetAdvantage Security Manager must be purchased separately. To learn more, please visit hp.com/go/securitymanager.

⁶ HP calculations based on ENERGY STAR® normalized TEC data comparing HP LaserJet 200-500 series printers at launch. See hp.com/ecosmart

⁷ HP Auto-On/Auto-Off Technology capabilities subject to printer and settings; may require a firmware upgrade.

Откази от отговорност относно техническите спецификации

¹ Measured using ISO/IEC 24734, excludes first set of test documents. For more information see <http://www.hp.com/go/printerclaims>. Exact speed varies depending on the system configuration, software application, driver, and document complexity.

² Measured using ISO/IEC 17629. For more information see <http://www.hp.com/go/printerclaims>. Exact speed varies depending on the system configuration, software application, driver, and document complexity.

³ For yield information on the cartridge included with your printer, see <http://www.hp.com/go/toneryield>. Yield values measured in accordance with ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors.



www.blauer-engel.de/uz219



© Copyright 2024 г. HP Development Company, L.P. Информацията в настоящия документ може да бъде променяна без предизвестие. Единствените гаранции за продуктите и услугите на HP са указани изрично в съответните придружаващи ги документи за гаранция. Нищо, съдържащо се в този документ, не следва да се тълкува като допълнителна гаранция. HP не носи отговорност за технически или редакционни грешки или пропуски в съдържанието на настоящия документ.

bg-bg Юли 2024

