


## 10.2" to 10.5" Secure iPad® Enclosure with Surface Mount

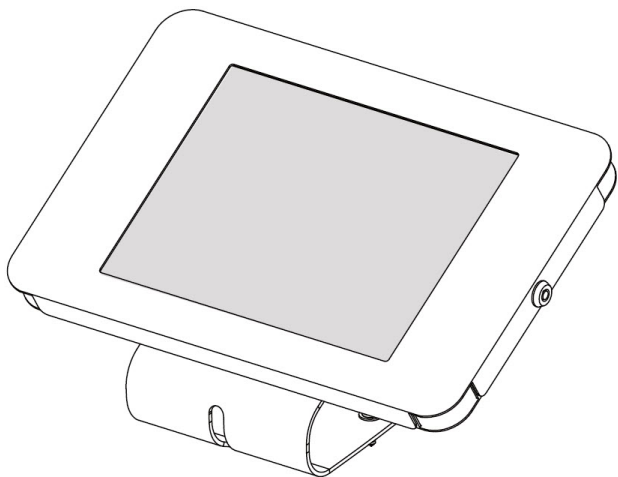

*\*Actual product may vary from photos*

### User Manual

SKU: SECTBLTPOS2

## Compliance Statements

### **Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols**

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

Apple and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

# Safety Statements

## Safety Measures

- Product installation and/or mounting should be completed by a certified professional as per the local safety and building code guidelines.

## Mesures de sécurité

- L'installation et/ou le montage du produit doit être réalisé par un professionnel certifié et dans le respect des normes locales et du code de construction local.

## 安全対策

- 製品の設置やマウントは、使用地域の安全ガイドラインおよび建築基準に従い、有資格の専門業者が行うようにしてください。

## Misure di sicurezza

- L'installazione e/o il montaggio dei prodotti devono essere eseguiti da un tecnico professionale certificato che conosca le linee guida locali sulle norme edilizie e sulla sicurezza.

## Säkerhetsåtgärder

- Installation och/eller montering får endast göras av behöriga yrkespersoner och enligt gällande lokala förordningar för säkerhet och byggnormer.

## Warning Statements

- Assemble this product according to the instructions.
- Read the entire manual and ensure the instructions are fully understood before assembling and/or using this product.
- This product is intended for indoor use only and should not be used outdoors.
- Do not over-tighten the screws. If any resistance is encountered, stop tightening.
- Pinch hazard! Keep your fingers clear from moving components.

## Varningsmeddelanden

- Se till att du monterar produkten i enlighet med instruktionerna.
- Läs hela manualen och se till att du förstår instruktionerna innan du börjar montera och använda produkten.
- Produkten är endast avsedd för användning inomhus och ska inte användas utomhus.
- Dra inte åt skruvarna för hårt när du monterar produkten. Om du måste ta i när du skruvar åt kan du sluta skruva åt.
- Klämrisk! Håll fingrarna borta från rörliga komponenter.

## Waarschuwingen

- Zorg dat u dit product volgens de instructies in elkaar zet.
- Lees de gehele handleiding en zorg dat u de instructies begrijpt voordat u dit product in elkaar zet en gebruikt.
- Dit product is alleen bedoeld voor binnengebruik en mag niet buiten worden gebruikt.
- Draai de schroeven niet te strak vast wanneer u dit product in elkaar zet. Als u weerstand voelt tijdens het vastdraaien van de schroeven, stop dan.
- Gevaar voor beknelling! Houd uw vingers weg van de bewegende onderdelen als u.

## 注意

- 必ず取扱説明書に従って本製品の組み立てを行って下さい。
- 最初に取扱説明書を最後まで読み、本製品の組み立て方をすべて理解してから組み立て作業を始めて下さい。
- 本製品は、室内での使用を想定しています。戸外では使用しないで下さい。

- 本製品を組み立てる際、ネジを締めすぎないようにして下さい。ネジを締めているうちに手応えを感じたら、締めるのを止めてください。
- 危険! 可動部品に近づかないでください。

## Dichiarazioni di avvertenza

- Assicurarsi di Assemblare il prodotto secondo le istruzioni.
- Leggere l'intero manuale e assicurarsi di aver compreso tutte le istruzioni prima di iniziare ad assemblare e a utilizzare questo prodotto.
- Il prodotto è destinato all'uso in ambienti interni. Se ne sconsiglia l'impiego in ambienti esterni.
- Durante l'assemblaggio del prodotto, non stringere troppo le viti. Se si incontra resistenza mentre si stringono le viti, interrompere l'operazione.
- Pericolo di Schiacciamento! Tenere lontane le dita da parti in movimento.

## Avertissements

- Assemblez ce produit conformément aux instructions.
- Lisez tout le manuel et assurez-vous que vous comprenez les instructions avant de commencer à assembler et utiliser ce produit.
- Ce produit est uniquement destiné à une utilisation en intérieur et ne doit pas être utilisé à l'extérieur.
- Ne serrez pas trop les vis lors de l'assemblage de ce produit. Si vous rencontrez une résistance lors du serrage des vis, cessez de serrer.
- Risque de pincement ! Ne pas approcher les doigts des composants mobiles.

## Mensagens de aviso

- Certifique-se de que monta este produto de acordo com as instruções.
- Leia todo o manual e certifique-se de que entende as instruções antes de começar a montar e a utilizar este produto.
- Este produto destina-se apenas a uma utilização no interior e não deve ser utilizado no exterior.
- Quando montar este produto, não aperte demasiado os parafusos. Se encontrar resistência enquanto aperta os parafusos, pare de apertar.
- Risco de dedos trilhados! Mantenha os dedos afastados dos componentes em movimento.

## Advertencias de uso

- Asegúrese de ensamblar este producto según las instrucciones.
- Lea todo el manual y asegúrese de haber comprendido bien las instrucciones antes de proceder con el ensamblaje y el uso de este producto.
- El uso de este producto es solo para interiores y no debe utilizarse en exteriores.
- Cuando ensamble este producto, no apriete los tornillos más de lo debido. Si al apretar los tornillos siente resistencia, no los apriete más.
- ¡Peligro de Aplastamiento! Mantenga sus dedos alejados de las partes móviles.

## Warnhinweise

- Beachten Sie bei der Montage dieses Produkts die Montageanweisungen.
- Bevor Sie dieses Produkt montieren und verwenden, lesen Sie das gesamte Handbuch und vergewissern Sie sich, dass Sie die Anweisungen verstanden haben.
- Dieses Produkt ist nur zum Gebrauch in Innenräumen vorgesehen und sollte nicht im Freien verwendet werden.
- Achten Sie bei der Montage des Produkts darauf, die Schrauben nicht zu fest anzuziehen. Sobald Sie beim Anziehen der Schrauben auf Widerstand stoßen, stellen Sie das Anziehen ein.
- Einklemmgefahr! Halten Sie Ihre Finger fern von beweglichen Teilen.

# Table of Contents

Compliance Statements .....	i
Safety Statements .....	ii
Warning Statements .....	iii
Product Diagram .....	1
Front View .....	1
Product Dimensions .....	2
Front View .....	2
Rear View .....	2
Bottom View.....	2
Edge View.....	2
Side View .....	3
Product Information .....	3
Requirements .....	3
Package Contents .....	4
Installation .....	6
Add the iPad to the Tablet Enclosure Assembly.....	6
Unlock the Tablet Enclosure Assembly .....	6
Add the Felt Tape to the Front Plate.....	7
Add the Foam Blocks to the Rear Plate .....	7
Insert the iPad into the Tablet Enclosure Assembly.....	8
Mounting the Angled Bracket .....	9
Mounting Option #1 - Tabletop- Fixed.....	9


---

Mounting Option #2 - Tabletop - Rotating .....	10
Mounting Option #3 - Wall Mount.....	11
Attach the Tablet Enclosure Assembly to the Angled Bracket.....	12
<b>Warranty .....</b>	<b>13</b>



# Product Diagram


## Front View

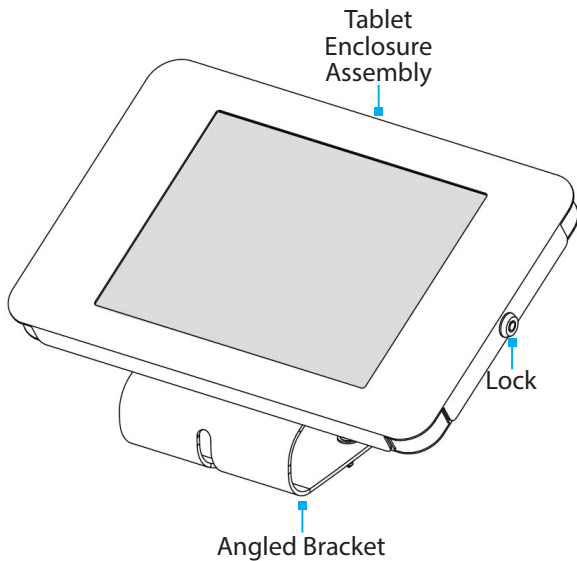


## Product Dimensions

**Note:** All measurements are in millimeters.


### Front View

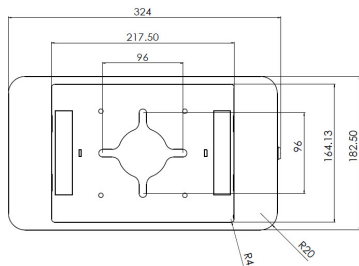


### Rear View




### Bottom View

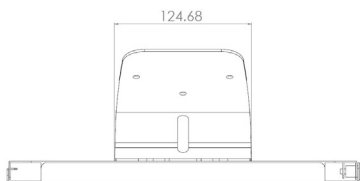

### Edge View



## Side View



## Product Information













### Requirements

For the latest manuals, product information, technical specifications, and Declarations of Conformance, please visit: [www.StarTech.com/SECTBLTPOS2](http://www.StarTech.com/SECTBLTPOS2)

- Phillips Head Screwdriver
- Electric Drill
- Pencil

## Package Contents

**Note:** The following images are not to scale.

 <p>Tablet Enclosure Assembly Qty: 1</p>	 <p>Angled Bracket Qty: 1</p>	 <p>Keys Qty: 2</p>	 <p>200 x 5 mm Felt Tape Qty: 2</p>
 <p>150 x 10 mm Felt Tape Qty: 2</p>	 <p>20 x 15 x 3 mm EVA Pads Qty: 4</p>	 <p>45 x 15 x 2 mm EVA Pads Qty: 2</p>	 <p>100 x 25 x 20 mm Foam Blocks Qty: 2</p>
 <p>100 x 15 x 12 mm Foam Blocks Qty: 2</p>	 <p>M4 x 8 mm Screws Qty: 4</p>	 <p>M2.5 Hex Key Qty: 1</p>	 <p>Rubber Pads Qty: 4</p>




5 x 20 mm Self  
Tapping Screws

Qty: 3



Small Washers

Qty: 3



Large Washers

Qty: 2



User Manual

Qty: 1

## Installation

**Note:** Do not overtighten any of the screws.

**Pinch hazards!** Keep hands away from any pinch points created by the mechanical components. Failure to do so may result in serious personal injury.

### Add the iPad to the Tablet Enclosure Assembly

### Unlock the Tablet Enclosure Assembly

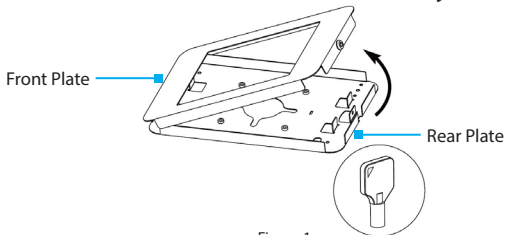


Figure 1

1. Insert the **Key** into the **Lock**, located on the side of the **Tablet Enclosure Assembly**, and turn counterclockwise to unlock. (Figure 1)
2. Remove the **Front Plate** from the **Rear Plate**.

## Add the Felt Tape to the Front Plate

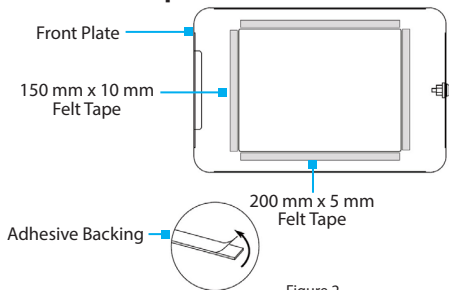


Figure 2

1. Remove the **Adhesive Backing** from the **200 x 5 mm Felt Tape** (x 2) and affix to the long edges of the inside of the **Display Frame**, located on the **Front Plate**. (Figure 2)
2. Remove the **Adhesive Backing** from the **150 x 10 mm Felt Tape** (x 2) and affix to the short edges of the inside of the **Display Frame**, located on the **Front Plate**.

## Add the Foam Blocks to the Rear Plate

20 x 15 mm x 3 mm  
EVA Pads




Figure 3

100 x 25 mm  
x 20 mm EVA  
Pads






Figure 4

1. Remove the **Adhesive Backing** from the **20 x 15 x 3 mm EVA Pads** (x 4) and affix to the inside edge of the **Tabs** (x 4), located on the inside of the **Rear Plate**. (Figure 3)

2. (Optional) Remove the **Adhesive Backing** from the **100 x 25 x 20 mm Foam Blocks** (x 2) and affix next to the **Tabs**, towards the center of the **Rear Plate**.
3. (Optional) Remove the **Adhesive Backing** from the **100 x 15 x 12 mm Foam Blocks** (x 2) and affix along the inside edge on the top and bottom of the **Rear Plate**. (Figure 4)

## Insert the iPad into the Tablet Enclosure Assembly



1. Insert the **Power/Data Cable** through one of the openings, located in the rear/sides of the **Rear Plate**, and into the **iPad**. (Figure 5)
2. Place the **iPad** into the **Tablet Enclosure Assembly**, routing the **Power/Data Cable** around the **EVA Pads**. Ensure the **Power/Data Cable** is routed without any sharp bends.
3. Attach the **Front Plate** to the **Rear Plate** and **Lock** the **Tablet Enclosure Assembly**, using the **Key**. (Figure 6)



## Mounting the Angled Bracket

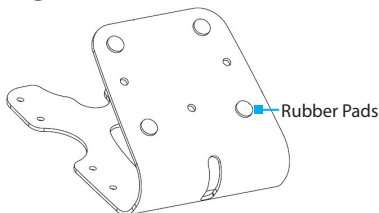


Figure 7

- Remove the **Adhesive Backing** from the **Rubber Pads** (x 4) and affix to the base of the **Angled Bracket**. (Figure 7)

## Mounting Option #1 - Tabletop - Fixed

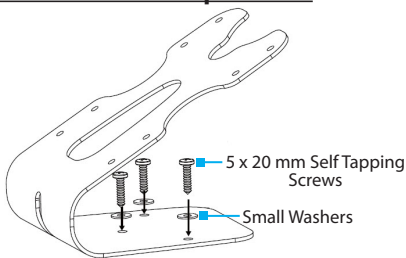


Figure 8

1. Place the **Angled Bracket** in the intended mounting location, on a **Tabletop**.
2. Mark the location of the **Screw Holes** (x 3), using a **Pencil**.
3. Remove the **Angled Bracket** and drill appropriately sized **Pilot Holes** (x 3) to an appropriate depth in the **Tabletop**, using an **Electric Drill**.

4. Thread the **Small Washers** (x 3) over the **5 x 20 mm Self Tapping Screws** (x 3) to complete the **Screw Assemblies**.
5. Align the mounting holes, located on the **Angled Bracket**, with the **Pilot Holes**, located in the **Tabletop**.
6. Insert the **Screw Assemblies** (x 3) through the **Angled Bracket** and into the **Tabletop** and tighten, using a **Phillips Head Screwdriver**. (Figure 8)

## Mounting Option #2 - Tabletop - Rotating

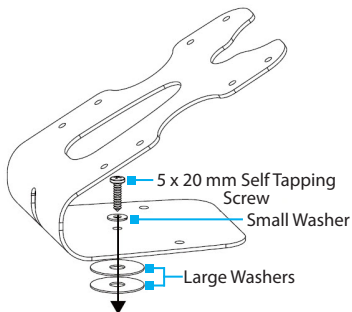


Figure 9

1. Place the **Angled Bracket** onto the intended mounting location, on a **Tabletop**.
2. Mark the location of the **Screw Hole**, located closest to the front of the **Angled Bracket**, using a **Pencil**.
3. Remove the **Angled Bracket** and drill an appropriately sized **Pilot Hole** in the **Tabletop**, using an **Electric Drill**.
4. Thread a **Small Washer** over a **5 x 20 mm Self Tapping Screw** to complete the **Screw Assembly**.

5. Align the **Large Washers** (x 2) over the **Pilot Hole**. (Figure 9)
6. Align the hole, located towards the front of the **Angled Bracket**, with the hole, located in the **Large Washers**.
7. Insert the **Screw Assembly** through the **Angled Bracket**, the **Large Washers**, and into the **Tabletop** and partially tighten, using a **Phillips Head Screwdriver**.
8. Adjust the tension of the **Screw Assembly** to adjust the ease of rotation.

### Mounting Option #3 - Wall Mount

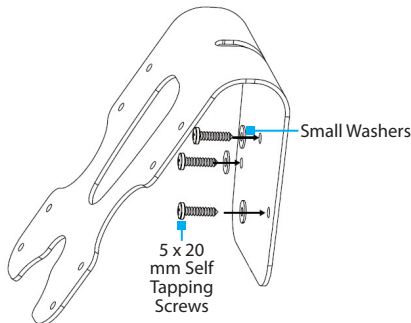


Figure 10

1. Place the **Angled Bracket** onto the intended mounting location, on a **Wall**.
2. Mark the location of the **Screw Holes** (x 3), using a **Pencil**.
3. Remove the **Angled Bracket** and drill appropriately sized **Pilot Holes** (x 3) in the **Wall**, using an **Electric Drill**.

4. Thread the **Small Washers** (x 3) over the **5 x 20 mm Self Tapping Screws** (x 3) to complete the **Screw Assemblies**.
5. Align the **Angled Bracket** with **Pilot Holes**, located in the **Wall**.
6. Insert the **Screw Assemblies** (x 3) through the **Angled Bracket** and into the **Wall** and tighten, using a **Phillips Head Screwdriver**. (Figure 10)

## Attach the Tablet Enclosure Assembly to the Angled Bracket

1. Align the holes, located on the **Rear Plate** of the **Tablet Enclosure Assembly**, with the holes, located in the **Angled Bracket**.
2. Insert the **M4 x 8 mm Screws** (x 4) through the **Angled Bracket** and into the rear of the **Tablet Enclosure Assembly** and tighten, using the **M2.5 Hex Key**.
3. Attach the **Power/Data Cable** to an available **Power Source**.

## Warranty Information

This product is backed by a five-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product.

Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit [www.startech.com](http://www.startech.com) for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

### Reviews

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.

#### StarTech.com Ltd.

45 Artisans Crescent  
London, Ontario  
N5V 5E9  
Canada

#### StarTech.com LLP

4490 South  
Hamilton Road  
Groveport, Ohio  
43125  
U.S.A.

#### StarTech.com Ltd.

Unit B, Pinnacle 15  
Gowerton Road  
Brackmills,  
Northampton  
NN4 7BW  
United Kingdom

#### StarTech.com Ltd.

Siriusdreef 17-27  
2132 WT  
Hoofddorp  
The Netherlands

FR: [fr.startech.com](http://fr.startech.com)

DE: [de.startech.com](http://de.startech.com)

ES: [es.startech.com](http://es.startech.com)

NL: [nl.startech.com](http://nl.startech.com)

IT: [it.startech.com](http://it.startech.com)

JP: [jp.startech.com](http://jp.startech.com)