



Refrigerator

User manual

RH56J69*

SEUK Free Standing Appliance

SAMSUNG

Contents

Safety information	3
Important safety symbols	4
Severe warning signs for transportation and site	5
Severe warning signs for installation	6
Caution signs for installation	8
Severe warning signs for using	9
Caution signs for using	12
Caution signs for cleaning and maintenance	13
Severe warning signs for disposal	14
Additional tips for proper usage	15
Setting up	18
Getting ready to install the refrigerator	18
Required tools	20
Removing the refrigerator doors	20
Reattaching the refrigerator doors	25
Levelling the refrigerator	28
Checking the water dispenser line (optional)	31
Using the ice maker	31
Installing the water dispenser line (for exterior model)	34
Operating	38
Initial settings	38
Controlling the temperature	40
Using the ice and cold water dispenser	41
Parts and features	42
Removing the freezer accessories	44
Removing the fridge accessories	46
Cleaning the refrigerator	47
Replacing the interior light	47
Changing the water filter	47
Troubleshooting	50

Safety information

- Before operating the appliance, please read this manual thoroughly and retain it at a safe place near the appliance for your future reference.
- Use this appliance only for its intended purpose as described in this instruction manual. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- Warnings and Important Safety Instructions in this manual do not cover all possible conditions and situations that may occur.
It is your responsibility to use common sense, caution, and care when installing, maintaining, and operating your appliance.
- Because these following operating instructions cover various models, the characteristics of your refrigerator may differ slightly from those described in this manual and not all warning signs may be applicable. If you have any questions or concerns, contact your nearest service center or find help and information online at www.samsung.com.

Safety information

Important safety symbols

WARNING

Hazards or unsafe practices that may result in **severe personal injury or death**.

CAUTION

Hazards or unsafe practices that may result in **minor personal injury or property damage**.

NOTE

-  Do NOT attempt.
-  Do NOT disassemble.
-  Do NOT touch.
-  Follow directions carefully.
-  Unplug the power plug from the wall socket.
-  Make sure the machine is grounded to prevent electric shock.
-  Call the contact center for help.

These warning signs are here to prevent injury to you and others.

Please follow them carefully.

After reading this section, keep it in a safe place for future reference.

CE Notice

This product has been determined to be in compliance with the Low Voltage Directive (2006/95/EC), the Electromagnetic Compatibility Directive (2004/108/EC), RoHS Directive (2011/65/EU), Commission Delegated Regulation (EU) No 1060/2010 and the Eco-Design Directive(2009/125/EC) implemented by Regulation (EC) No 643/2009 of the European Union. (For products sold in European Countries only)

Severe warning signs for transportation and site

WARNING

-  When transporting and installing the appliance, care should be taken to ensure that no parts of the refrigerating circuit are damaged.

- Refrigerant leaking from the pipe work could ignite or cause an eye injury.

If a leak is detected, avoid any naked flames or potential sources of ignition and air the room in which the appliance is standing for several minutes.

- In order to avoid the creation of a flammable gas-air mixture if a leak in the refrigerating circuit occurs, the size of the room in which the appliance may be sited depends on the amount of refrigerant used.
- Never start up an appliance showing any signs of damage.

If in doubt, consult your dealer. The room where the refrigerator will be sited must be 1 m³ in size for every 8 g of R-600a refrigerant inside the appliance.

The amount of refrigerant in your particular appliance is shown on the identification plate inside the appliance.

Safety information

Severe warning signs for installation

WARNING

- Do not install the refrigerator in a damp place or place where it may come in contact with water.
- Deteriorated insulation of electrical parts may cause an electric shock or fire.
- Do not place this refrigerator in direct sunlight or expose to the heat from stoves, room heaters or other appliance.
- Do not plug several appliances into the same multiple power board. The refrigerator should always be plugged into its own individual electrical which has a voltage rating that matched the rating plate.
- This provides the best performance and also prevents overloading house wiring circuits, which could cause a fire hazard from overheated wires.
- If the wall socket is loose, do not insert the power plug.
- There is a risk of electric shock of fire.
- Do not use a cord that shows cracks or abrasion damage along its length or at either end.
- Do not bend the power cord excessively or place heavy articles on it.
- Do not use aerosols near the refrigerator.
- Aerosols used near the refrigerator may cause an explosion or fire.

-
- ★ • This refrigerator must be properly installed and located in accordance with the manual before it is used.
 - Connect the power plug in proper position with the cord hanging down.
 - If you connect the power plug upside down, wire can get cut off and cause fire or electric shock.
 - Make sure that the power plug is not squashed or damaged by the back of the refrigerator.
 - When moving the refrigerator, be careful not to roll over or damage the power cord.
 - This constitutes a fire hazard.
 - The appliance must be positioned so that the plug is accessible after installation.

-
- ⚡ • The refrigerator must be grounded.
 - You must ground the refrigerator to prevent any power leakages or electric shocks caused by current leakage from the refrigerator.
 - Never use gas pipes, telephone lines or other potential lightening rods as ground.
 - Improper use of the ground plug can result in electric shock.


-
- ✎ • If the power cord is damaged, have it replaced immediately by the manufacturer or its service agent.
 - The fuse on the refrigerator must be changed by a qualified technician or service company.
 - Failing to do so may result in electric shock or personal injury.

Safety information

Caution signs for installation

⚠ CAUTION

- ★ • Keep ventilation opening in the appliance enclosure or mounting structure clear of obstruction.

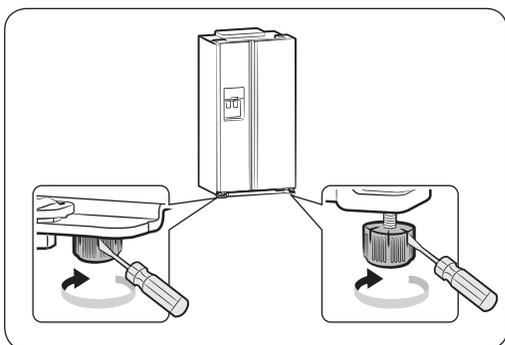

- Allow the appliance to stand for 2 hours after installation.
- When installing the refrigerator, make sure both legs contact the floor for secure installation. Legs are located at the bottom back of each door. Insert a flathead screwdriver and turn it in the direction of the arrow until it is level.
- Always balance the load on each door.
- Overload on any one door may fell the refrigerator, causing physical injury.

Severe warning signs for using

WARNING

-  • Do not insert the power plug with wet hands.
- Do not store articles on the top of the appliance.
- When you open or close the door, the articles may fall and cause personal injury and/or material damage.
- Do not put items filled with water on the refrigerator.
- If spilled, there is a risk of fire or electric shock.
- Do not let children hang on the door.
- Failure to do so may cause serious personal injury.
- Do not leave the doors of the refrigerator open while the refrigerator is unattended and do not let children enter inside of the refrigerator.
- There is a risk of children entrapment and serious personal injury because of low temperature.
- Never put fingers or other objects into the dispenser hole.
- Failure to do so may cause personal injury or material damage.
- Do not store volatile or flammable substances such as benzene, thinner, alcohol, ether or LP gas in the refrigerator.
- The storage of any of such products may cause explosions.

Safety information

- ⊘ • Do not store low temperature-sensitive pharmaceuticals products, scientific materials or other low temperature-sensitive products in the refrigerator.
 - Products that require strict temperature controls must not be stored in the refrigerator.
 - Do not place or use electrical appliance inside the refrigerator, unless they are of a type recommended by the manufacturer.
 - Do not use a hair dryer to dry the inside of the refrigerator. Do not place a lighted candle in the refrigerator for removing bad odors.
 - This may result in electric shock or fire.
 - Do not touch the inside walls of the freezer or products stored in the freezer with wet hands.
 - This may cause frostbite.
 - Do not use mechanical devices or any other means to accelerate the defrosting process, other than those recommended by the manufacturer.
 - Do not damage the refrigerant circuit.
-

- ★ • This product is intended only for the storage of food in a domestic environment.
 - Bottles should be stored tightly together so that they do not fall out.
 - If a gas leak is detected, avoid any naked flames or potential sources of ignition and air the room in which the appliance is standing for several minutes.
 - Use only the LED Lamps provided by manufacturer or service agents.
 - Children should be supervised to ensure that they do not play with and/or climb into the appliance.
-

- ⊘ • Do not disassemble or repair the refrigerator by yourself.
 - You run risk of causing a fire, malfunction and/or personal injury. In case of malfunction, please contact your service agents.

-
- If the appliance generates a strange noise, a burning or smell or smoke, unplug the power plug immediately and contact your nearest service center.
 - Failing to do so may result in electric or fire hazards. Keep ventilation opening in the appliance enclosure or mounting structure clear of obstruction.
 - If you experience difficulty when changing the light, contact service agents.
 - If the products equipped with LED Lamp, do not disassemble Lamp Cover and LED Lamp by yourself.
 - Please contact your service agents.
 - If any dust or water is in refrigerator, pull out power plug and contact your Samsung Electronics service center.
 - There is a risk of fire.

Safety information

Caution signs for using

CAUTION

- ★ • To get best performance of product,
 - Do not place foods too closely in front of the vents at the rear of the appliance as it can obstruct free air circulation in the refrigerator compartment.
 - Wrap the food up properly or place it in airtight containers before put it into the refrigerator.
 - Do not place carbonated or fizzy drinks in the freezer compartment. Do not put bottles or glass containers in the freezer.
 - When the contents freeze, the glass may break and cause personal injury and property damage.
 - Do not change the functionality of or modify the refrigerator.
 - Changes or modifications may result in personal injury and/or property damage.

Any changes or modifications performed by a 3rd party on this completed appliance is neither covered under Samsung warranty service, nor is Samsung responsible for safety issues and damages that result from 3rd party modifications.

- Do not block air holes.
 - If the air holes are blocked, especially with a plastic bag, the refrigerator can be over cooled. If this cooling period lasts too long, the water filter may break and cause water leakage.
 - Do not put any newly introduced food for freezing near to already food.
- Please observe maximum storage times and expiry dates of frozen goods.
- Fill water tank, ice tray, water cubes only with potable water.
- Use only the ice maker provided with the refrigerator.
- The water supply to this refrigerator must only be installed/connected by a suitably qualified person and connect to a potable water supply only.

-
- In order to operate the ice maker properly, water pressure of 138 ~ 862 kPa (19.9 ~ 125.1 psi) is required.

Caution signs for cleaning and maintenance

CAUTION

-  Do not directly spray water inside or outside the refrigerator.
 - There is a risk of fire or electric shock.
 - Do not spray inflammable gas near the refrigerator.
 - There is a risk of explosion or fire.
 - Do not spray cleaning products directly on the display.
 - Printed letters on the display may come off.
 - Remove any foreign matter or dust from the power plug pins.
But do not use a wet or damp cloth when cleaning the plug, remove any foreign material or dust from the power plug pins.
 - Otherwise there is a risk of fire or electric shock.
 - Never put fingers or other objects into the dispenser hole and ice chute.
 - It may cause personal injury or material damage.
-

-  Unplug the refrigerator before cleaning and performing maintenance.

Safety information

Severe warning signs for disposal

WARNING

-  Ensure that none of the pipes on the back of the appliance are damaged prior to disposal.
- R-600a or R-134a is used as a refrigerant.
Check the compressor label on the rear of the appliance or the rating label inside the refrigerator to see which refrigerant is used for your refrigerator.
When this product contains flammable gas (Refrigerant R-600a), contact your local authority in regard to safe disposal of this product.
Cyclopentane is used as a insulation blowing gas.
The gases in insulation material require special disposal procedure.
Please contact your local authorities in regard to the environmentally safe disposal of this product.
Ensure that none of the pipes on the back of the appliances are damaged prior to disposal.
The pipes shall be broke in the open space.
- If the appliance contains iso-butane refrigerant (R-600a), a natural gas with high environmental compatibility that is, however, also combustible.
When transporting and installing the appliance, care should be taken to ensure that no parts of the refrigerating circuit are damaged.
- When disposing of this product or other refrigerators, remove the door/door seals, door latch so that small children or animals cannot become trapped inside.
Leave the shelves in place so that children may not easily climb inside.
Children should be supervised to ensure that they do not play with the old appliance.
- Please dispose of the packaging material for this product in an environmentally friendly manner.

Additional tips for proper usage

NOTE

- In the event of a power failure, call the local office of your Electricity Company and ask how long it is going to last.
- Most power failures that are corrected within an hour or two will not affect your refrigerator temperatures. However, you should minimize the number of door openings while the power is off.
- Should the power failure last more than 2 hours, remove all ice in the Ice Bucket.
- Should the power failure last more than 24 hours, remove all frozen food.
- If keys are provided with the refrigerator, the keys should be kept out of the reach of children and not in vicinity of the appliance.
- The appliance might not operate consistently (possibility of temperature becoming too warm in refrigerator) when sited for an extended period of time below the cold end of the range of temperature for which the refrigerating appliance is designed.
- Do not store food which spoils easily at low temperature, such as bananas, melons.
- Your appliance is frost free, which means there is no need to manually defrost your appliance, as this will be carried out automatically.
- Temperature rising during the defrost can comply with ISO requirement. But if you want to prevent an undue rise in the temperature of the frozen food while defrosting the appliance, please wrap the frozen food in several layers of newspaper.
- Any increase in temperature of frozen food during defrosting can shorten its storage life.
- The temperature of two star section (sections) or compartment (compartments) which have two star symbol () is slightly higher than other freezer compartment (compartments).
The two star section (sections) or compartment (compartments) is (are) based on the instruction and/or the condition as delivered.

Safety information

Saving energy tips

- Install the appliance in a cool, dry room with adequate ventilation. Ensure that it is not exposed to direct sunlight and never put it near a direct source of heat (radiator, for example).
- Never block any vents or grilles on the appliance.
- Allow warm food to cool down before placing it in the appliance.
- Put frozen food in the refrigerator to thaw. You can then use the low temperatures of the frozen products to cool food in the refrigerator.
- Do not keep the door of the appliance open for too long when putting food in or taking food out. The shorter time for which the door is open, the less ice will form in the freezer.
- Clean the rear of the refrigerator regularly. Dust increases energy consumption.
- Do not set temperature colder than necessary.
- Ensure sufficient air exhaust at the refrigerator base and at the back wall of the refrigerator. Do not cover air vent openings.
- Allow clearance to the right, left, back and top when installing. This will help reduce power consumption and keep your energy bills lower.
- For the most efficient use of energy, please keep the all inner fittings such as baskets, drawers, shelves on the position supplied by manufacturer.

This appliance is intended to be used in household and similar applications such as

- staff kitchen areas in shops, offices and other working environments;
- farm houses and by clients in hotels, motels and other residential type environments;
- bed and breakfast type environments;
- catering and similar non-retail applications.


Setting up

Getting ready to install the refrigerator


Congratulations on the purchase of your Samsung Side-By-Side Refrigerator. We hope you will enjoy the many state-of-the-art features and efficiencies that this new appliance has to offer.


Selecting the best location for the refrigerator

- Select a location with easy access to the water supply.
- Select a location without direct exposure to sunlight.
- Select a location with level (or nearly level) flooring.
- Select a location with enough space for the refrigerator doors to open easily.
- Overall space required in use. Refer to drawing and dimension as below.
- Please ensure that appliance can be moved freely in the event of maintenance & service.

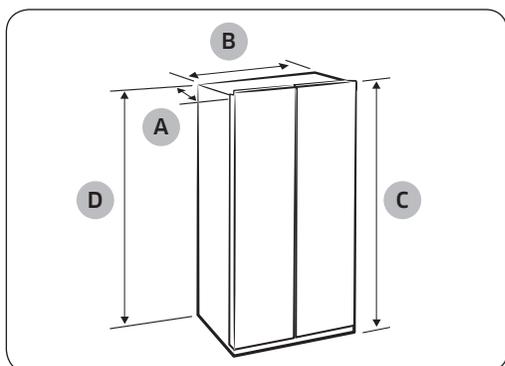

Depth "A"	708 mm
Width "B"	912 mm
Height "C"	1775 mm
Overall Height "D"	1794 mm

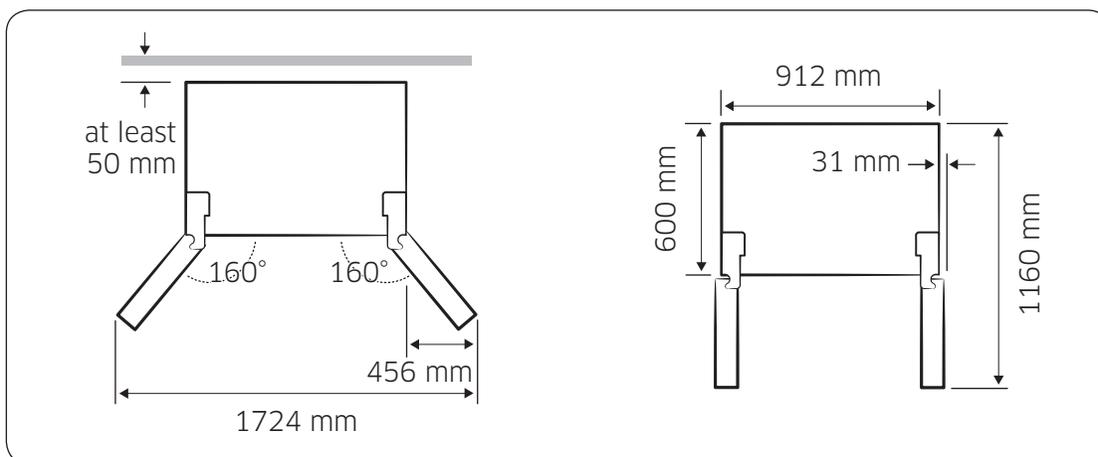

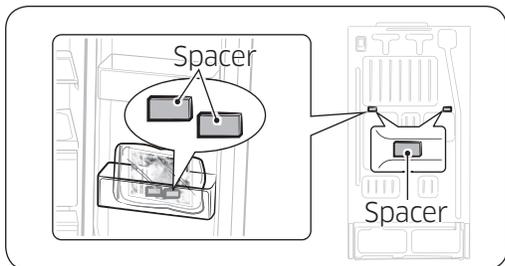


NOTE

Spacer(gray block) installation
 For better performance, please certainly fix the spacer on the rear of unit when installing the refrigerator. It is improving refrigerator performance.


Assembly method

Take out packed spacer from the lowest guard of the fridge.
 Check assembly location at the rear of Refrigerator like picture.
 Locate spacer assembly location and put spacer on the rear plate of Refrigerator.

When moving your refrigerator

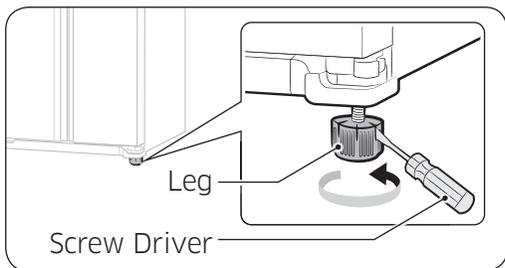

To prevent floor damage be sure the front levelling legs are in the up position (above the floor).
 Refer to 'Levelling the refrigerator' in the manual (at page 28).
 To protect the finish of the flooring, place the protection sheet such as packing carton under the refrigerator.

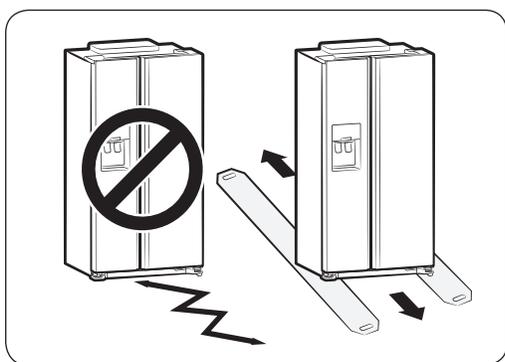


CAUTION

When installing, servicing or cleaning behind the refrigerator, be sure to pull the unit straight out and push back in straight after finishing.

Setting up

Required tools

Required Tools (Not provided)



Philips screwdriver (+)



Flat-blade screw driver (-)



Socket wrench 10 mm



Pliers




Allen wrench 5 mm

Removing the refrigerator doors

If your entrance won't allow the refrigerator to pass easily through it, you can remove the doors.


Removing the front leg cover

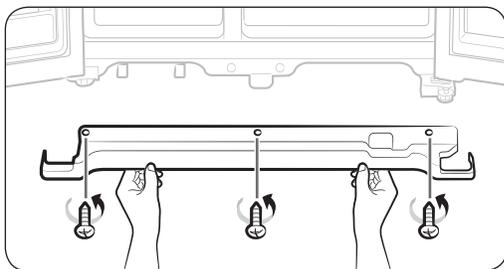

First, open both the freezer and refrigerator doors, and then take off the front leg cover by removing the three screws counter-clockwise.

Separating the water supply line from the refrigerator

If your entrance won't allow the refrigerator to pass easily through it, you can remove the doors.

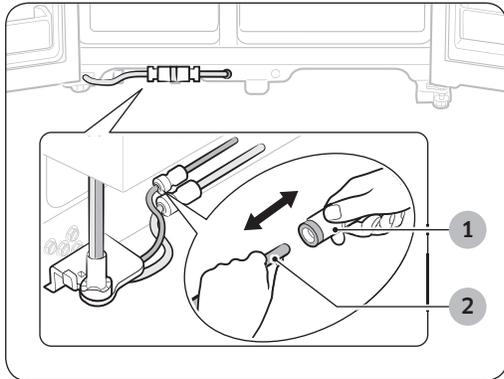

1. Remove the water line by pressing the coupler (1) and pulling the water line (2) away.

⚠ CAUTION


Be careful that the water tube match same colour.

Setting up


Removing the freezer door

A few things to mention first.


- Make sure that you lift the door straight up so the hinges are not bent or broken.
- Be careful not to pinch the water tubing and wire harness on the door.
- Place doors on a protected surface to prevent scratching or damage.

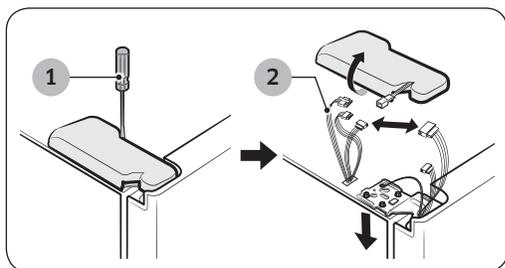

1. With the Freezer door closed, remove the upper hinge cover (1) using a screwdriver, and then disconnect the wires by gently pulling them apart (2).

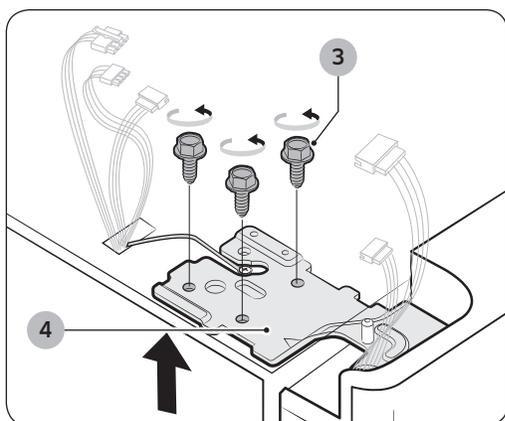

2. Remove hinge screws (3) by turning counter-clockwise, and take off the upper hinge (4). Be careful that the door does not fall on you as you are removing it.

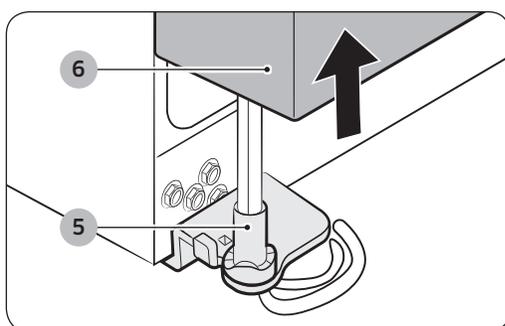


3. Next, remove the door from the lower hinge (5) by carefully lifting the door straight up (6).


CAUTION

Be careful not to pinch the water tubing and wire harness on the door.


Removing the fridge door

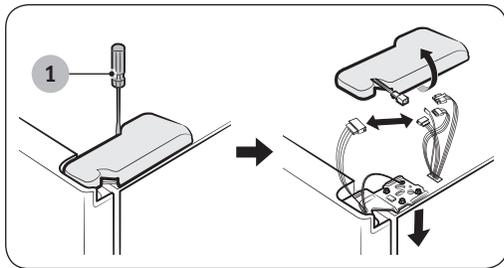

1. With the door closed, remove the upper hinge cover (1) using a screwdriver.

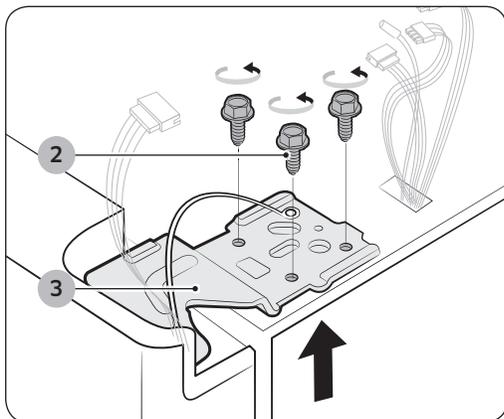


2. Remove hinge screws (2) by turning counter-clockwise, and take off the upper hinge (3).
Be careful that the door does not fall on you as you are removing it

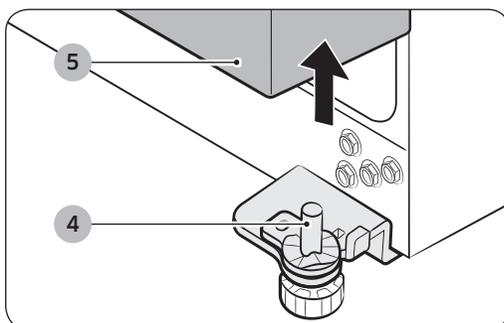


3. Remove the door from the lower hinge (4) by lifting the door straight up (5).

Setting up


Disassemble the cold compartment show case door

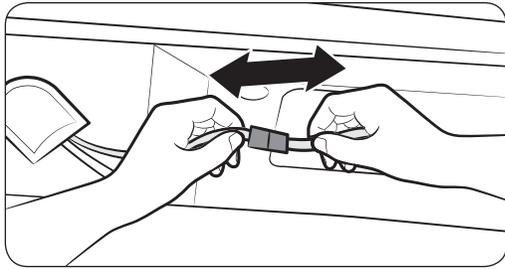

1. Disassemble the housing connector.

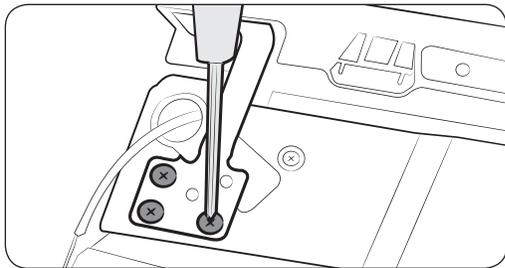

2. Disassemble the three fastening screws on the top hinge of the show case.

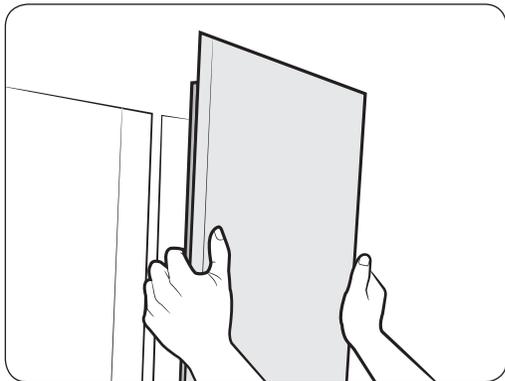


3. Remove the show case door.


Reattaching the refrigerator doors

Once you have safely placed your refrigerator where you plan for it to stay, it is time to put the doors back on.


Reattaching the Freezer Door

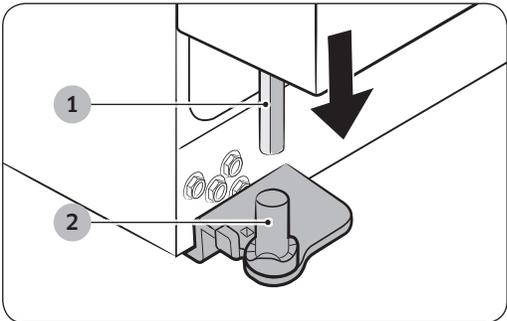

1. Replace the freezer door by inserting the water line (1) back into the lower corner of the door and then into the hole on the lower hinge (2). Gently pull the water line back down so that it runs straight, with no kinks or bends.

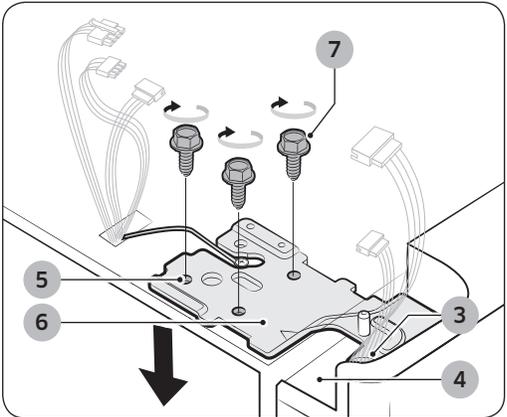


2. Insert the upper hinge shaft (3) into the hole on the corner of the freezer door (4). Make sure the hinge is level between the upper hinge hole (5) and the hole of the cabinet (6) and reattach the hinge screws (7) by turning in a clockwise direction. Reconnect the wires.

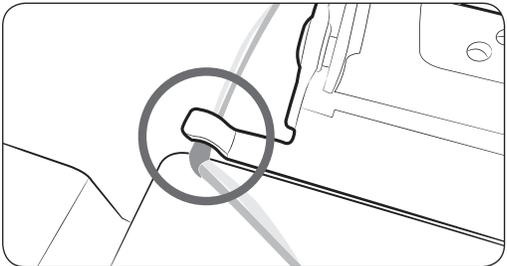


⚠ CAUTION
Fix the wire on the Hinge Hook to prevent the damage on the wire when reassembling.

Setting up

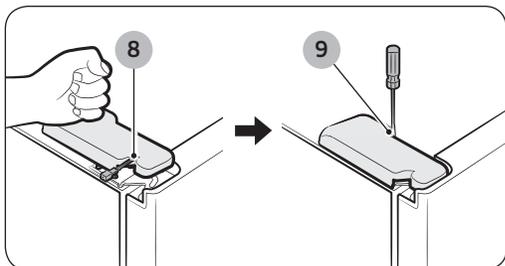


3. Place the front part of the upper hinge cover (8) on the front of the upper hinge (9) and reattach with the screw.


Reattaching the fridge door

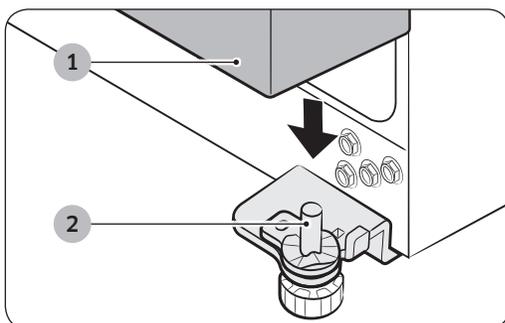

1. Fit the hole in the corner of the fridge door (1) over the lower hinge (2).

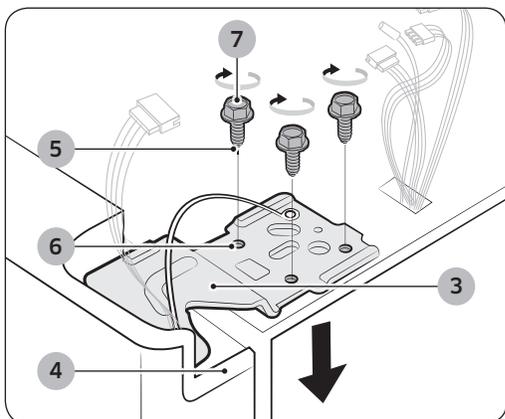


2. Insert the upper hinge shaft (3) into the hole on the hinge (4). Make sure the hinge is level between the upper hinge hole (5) and the hole on the top of the cabinet (6). Then, reattach hinge screws (7) by turning it in a clock wise direction.

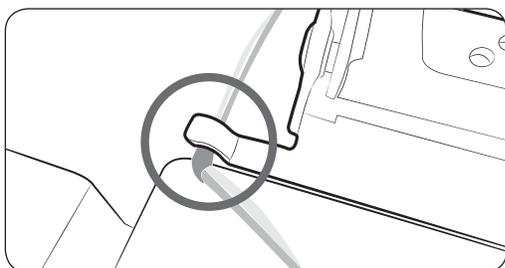


CAUTION

Fix the wire on the Hinge Hook to prevent the damage on the wire when reassembling.

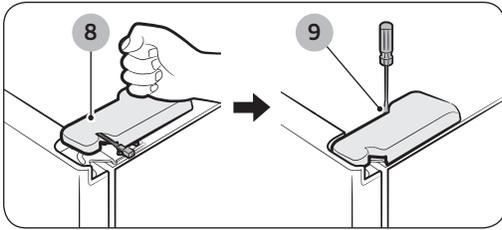


3. Place the front part of the upper hinge cover (8) on the front of the upper hinge (9) and reattach it with the screw.

Reattaching the water supply line

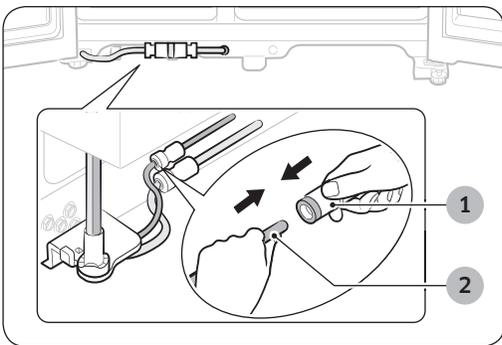

1. Insert the water line (2) into the coupler (1).

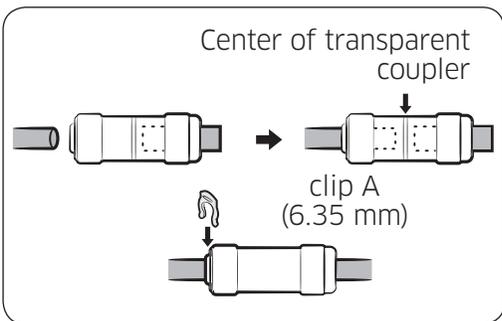

2. The Water Line must be fully Inserted to the center of transparent coupler to prevent water leakage from the dispenser.
3. Insert the 2 clips in the install pack and check that each clip holds the line firmly.

NOTE

Do not cut the water line.
Gently separate it from the coupler.

Setting up

Reattaching the front leg cover

NOTE

Before attaching the cover, check water connector for leakage.
Replace the front leg cover by turning the three screws clockwise, as shown in the figure.


Levelling the refrigerator

Now that the doors are back on the refrigerator, you will want to make sure the refrigerator is level so you can then make final adjustments. If the refrigerator is not level, it will not be possible to get the doors perfectly even.

NOTE


The front of the refrigerator is also adjustable.

When the freezer door is lower than the fridge

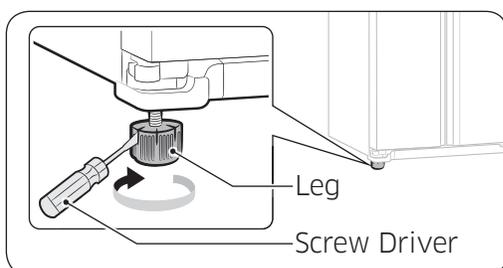

Insert a flat-blade screwdriver into a notch on the Leg, turn it clockwise or counter clockwise to level the freezer.

When the Freezer door is higher than the fridge

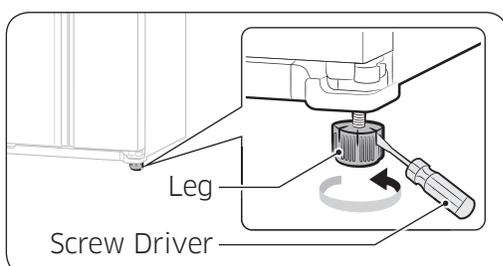




Insert a flat-blade screwdriver into a notch on the Leg, turn it clockwise or counter clockwise to level the fridge.

NOTE

Refer to the next section for the best way to make very minor adjustments to the doors.

How to adjust the door height


If one door is lower than the other:

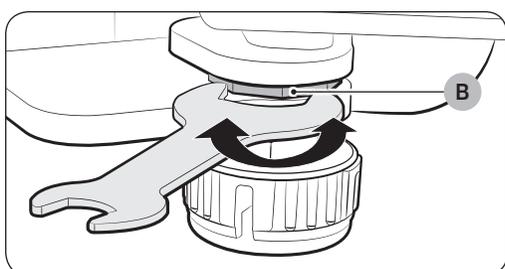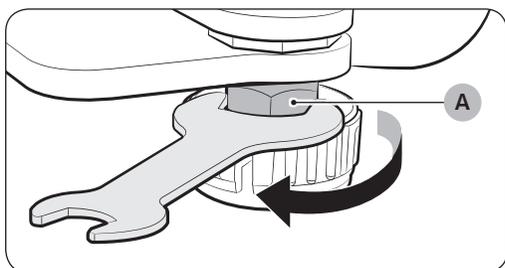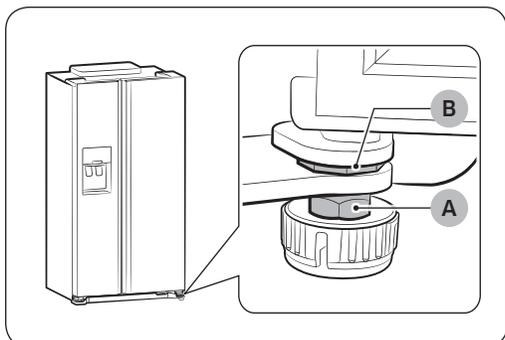

- The refrigerator door height can be adjusted using the adjustment nuts located at the bottom of each door.
- Raising the door too high can cause the door to interfere with the hinge cover when it is opened or closed.

1. Open the door that needs to be adjusted and loosen the clamping nut (A) at the bottom of the door by turning it clockwise (↻) using the spanner included in the product package. (Raise the lower of the two doors first.)
 2. Adjust the height of the door by turning the adjustment nut (B) counterclockwise (↺) with a spanner. (Turn it counterclockwise (↺) to increase the height of the door and clockwise (↻) to decrease it.)
- Open the door and adjust it from the inside.

Setting up

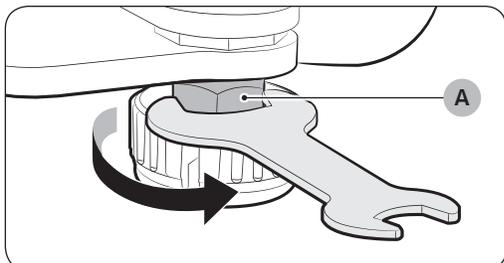


3. Once the doors are level, turn the clamping nut (A) counterclockwise (↺) to tighten it.

NOTE


Adjusting the level when the refrigerator is empty can result in the refrigerator becoming uneven again once items have been placed inside. If this occurs, adjust the level again.

How to adjust the gap between the refrigerator door and the refrigerator body


If the gap between the refrigerator door and the refrigerator is uneven :

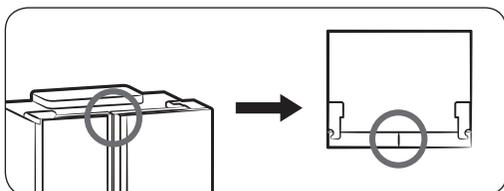

- Use the adjusters located at the top edge of the refrigerator, inside each door.

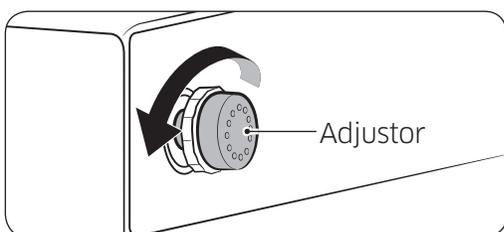

1. Open the door where the gap with the refrigerator is narrower and then turn the adjustor counterclockwise (↺) until the gap is even.

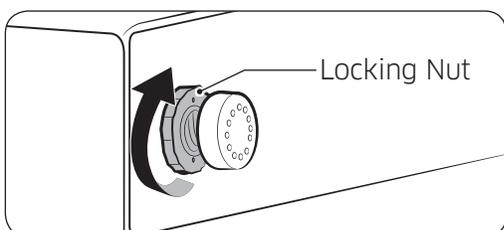

2. Once the gap between the door and the refrigerator has been adjusted, turn the adjustor nut clockwise (↻) to lock the adjustor in place.

Checking the water dispenser line (optional)

A water dispenser is just one of the helpful features on your new Samsung refrigerator. To help promote better health, the Samsung water filter removes unwanted particles from your water. However, it does not sterilize or destroy microorganisms. You will need to purchase a water purifying system to do that. In order for the icemaker to operate properly, water pressure of 138 ~862 kPa is required. Under normal conditions, a 170 cc paper cup can be filled in 10 seconds. If the refrigerator is installed in an area with low water pressure (below 138 kPa), you can install a booster pump to compensate for the low pressure. Make sure the water storage tank inside the refrigerator is properly filled. To do this, press the water dispenser lever until the water runs from the water outlet. When using the Water Dispenser, Slight noises can be generated from supplying water.

NOTE

Water Line installation Kits are included. You can find it in one of the freezer drawers.

Using the ice maker

To remove the ice bucket

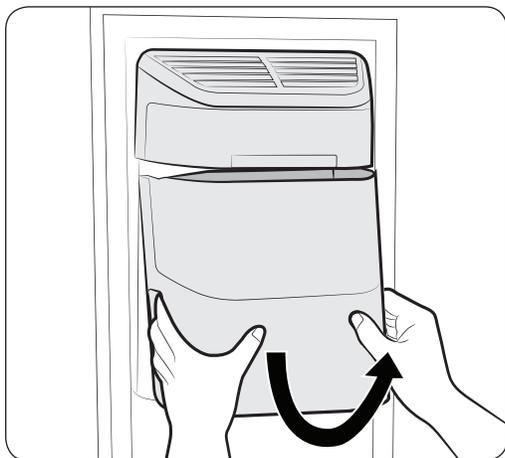


Figure1

- Hold the handle as shown in figure1.
- Slightly pull up the bottom part.
- Take out the ice bucket slowly.

Setting up

To refit the ice bucket


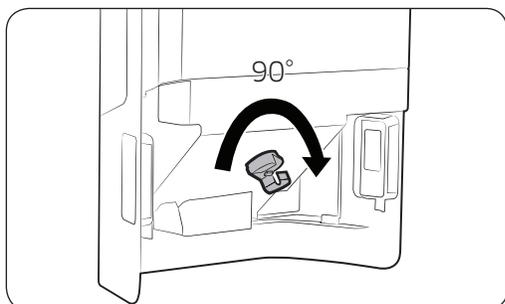


Figure2

- Assemble it in the reverse order of disassembly.
- Push the bucket in firmly until you hear a clicking sound.
- When the bucket does not fit into its place, turn the gear handle on its back by 90 degrees and reinstall it again as shown in figure 2.

Normal operation

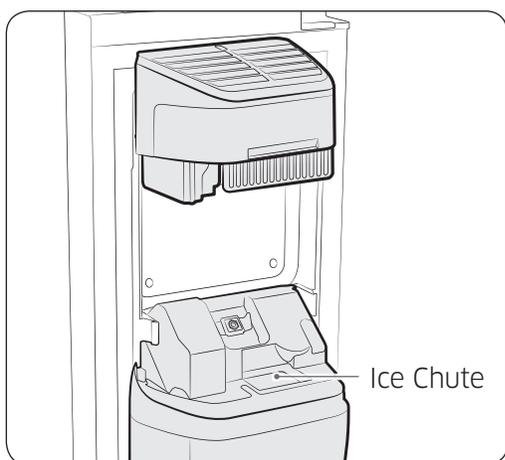

- Any sounds you hear when the ice maker dumps ice into the bucket are part of normal operation.
- Not dispensing ice for long periods may cause ice clumps in the ice bucket. Remove the remaining ice and empty the bucket.
- When ice does not come out, Check for any ice stuck in the chute and remove it.
- The first batch of ice cubes may be small due to air in the pipe after connection, any air will be purged during normal use.

 **CAUTION**

- When ICE OFF blinks on the display panel, reinsert the bucket and/or make sure it's installed properly.
- When the door is open, the Ice and water dispenser do not work.
- If you close the door hard, it may cause water spilling over the ice maker.
- To prevent dropping the ice bucket, use both hands when removing it.
- To prevent injury, be sure to clean up any ice or water that may have dropped on the floor.
- Do not let children hang on the ice dispenser or on the bucket.
They may get hurt.
- Be sure not to put your hand or any object into the ice chute.
- It may cause personal injury or damage mechanical parts.

Setting up

Installing the water dispenser line (for exterior model)


Parts for water line installation




Water line fixer and screws



Pipe connector



Water line



Purifier lock-clip



Purifier

Connecting to the water supply line

Connect the water pipe with coupler and tap.

1. Close the main water tap.
2. Connect coupler (A) to the tap.

CAUTION

The water line must be connected to the cold water pipe. If it is connected to the hot water pipe, it may cause the purifier to malfunction.


WARRANTY INFORMATION

This water line installation is not covered by the refrigerator or ice maker manufacturer's warranty. Follow these instructions carefully to minimise the risk of expensive water damage.


NOTE

If the coupler does not fit on the current tap, go the nearest authorized service dealer and purchase the right couplers fittings.


select the location where the purifier is to install. (Model with the purifier)

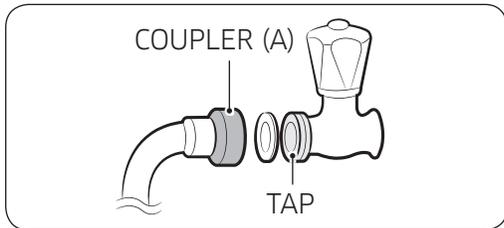

- If you wish to reassemble the water inlet and outlet sides of the purifier during purifier installation, see the reference illustration.

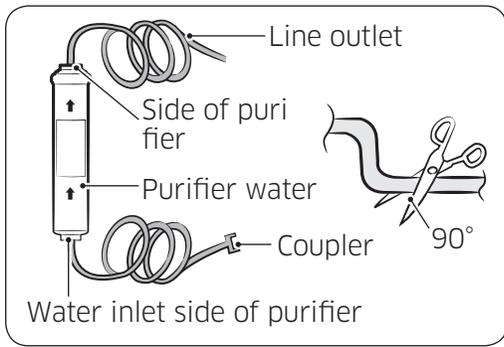


- Cut the water line attached to the purifier to the appropriate place after measuring the distance between the purifier and the cold water tap.

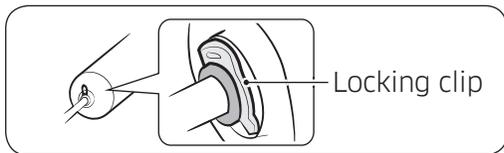

CAUTION
Insert Locking Clip After tube seated

Remove any residual matter inside the purifier (model with the purifier)

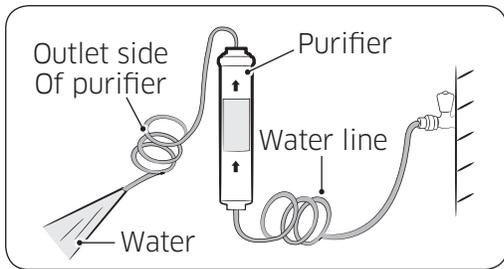


- Open the main water tap to check whether water is running through the water tube on the water inlet side of the purifier.
- If water does not come out through the line, check whether the tap is open.
- Leave the tap open until clean water is running out and any residual matter that built up during manufacturing has been removed.

NOTE
The initial dark discoloration of water and ice is normal.

Setting up

Attach the purifier lock-clip.

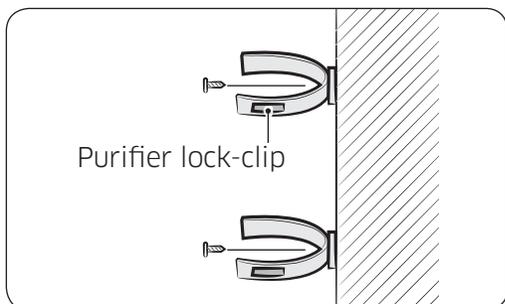


- Hold the purifier lock-clip in the appropriate position (under the sink for example) and fix it tightly into place where to screw.

CAUTION


Do not fix the purifier on the refrigerator or rear of refrigerator, it may cause material damage.

Secure the purifier in position.

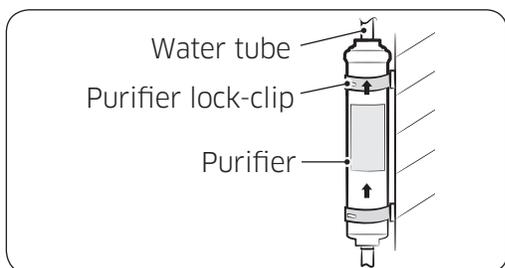


- Fix the purifier in position, as shown in the figure on the right.

Connect the water line to the refrigerator.

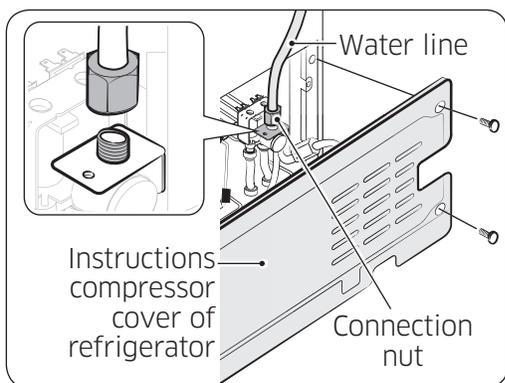

- Remove the compressor cover of the refrigerator.
- Connect the water line to the valve, as shown in the figure.
- When connected, check if there is any leakage.
- If any, repeat the connection.
- Reattach the compressor cover of the refrigerator.

Secure the water line.

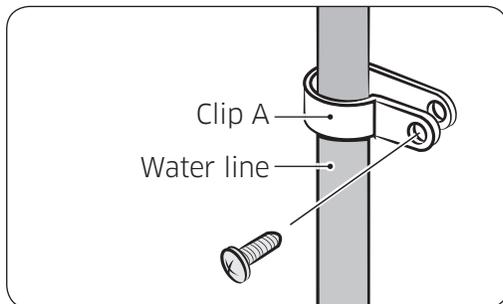

- Using clip (A), fix the water line to the wall (the back of refrigerator).
- When the water line is secure, make sure whether the water line is not excessively bent, pinched or squashed.

Removing any residual matter inside the water supply line after installing filter.


1. Turn ON the main water supply & turn OFF the valve to the water supply line.
2. Run water through the dispenser until the water runs clear (approximate 3 liter). This will clean the water supply system and remove air from the lines.
3. Additional flushing may be required in some households.
4. Open the refrigerator door and make sure there are no water leaks coming from the water filter.

NOTE

A newly installed water filter cartridge may cause water to briefly spurt from the water dispenser. This is due to air getting into the line. It should pose no problem to operation.

Operating

Initial settings

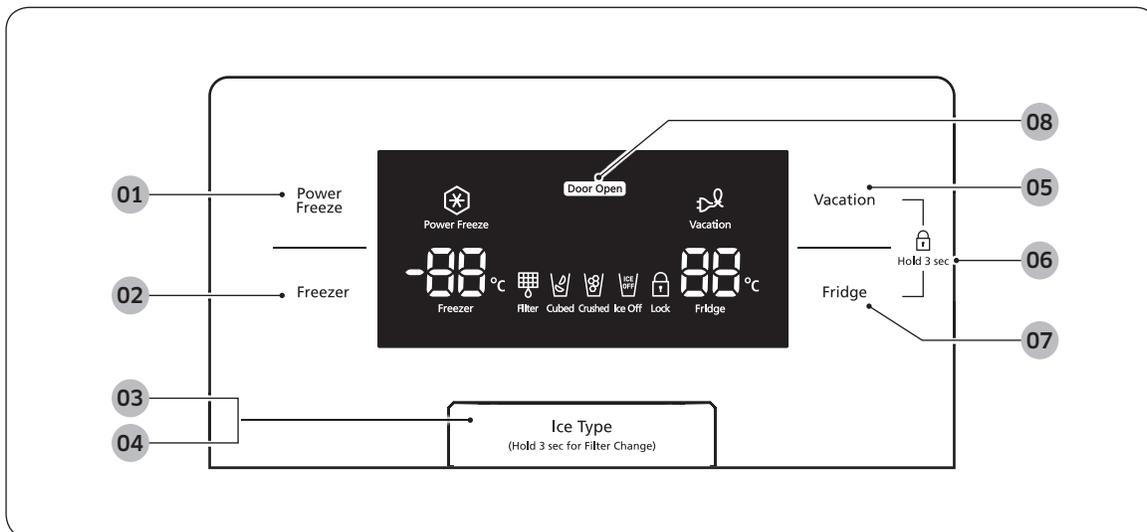

<p>01 Power freeze button</p>	<p>Speeds up the time needed to freeze products in the freezer. This can be helpful if you need to quickly freeze items that spoil easily or if the temperature in the freezer has warmed dramatically (For example, if the door was left open).</p>
<p>02 Freezer button</p>	<p>Press the Freezer button to set the freezer to your desired temperature, You can set the temperature between -15 °C and -23 °C.</p>
<p>03 Ice Type button</p>	<p>Use this button to choose Cubed, Crushed or to turn the Ice feature off.</p>
<p>04 Filter change button</p>	<p>When you change the filter, press this button for 3 seconds to reset the filter schedule.</p>
<p>05 Vacation button</p>	<p>If you are going on vacation or business trip or you do not need to use the refrigerator, press the Vacation button. When you select vacation button for fridge compartment off, display LED of Vacation will be on.</p> <p>⚠ CAUTION</p> <p>It is strongly requested to remove foods in the fresh-food compartment and do not leave the door open when you select Vacation function.</p>

06 Child lock function	By pressing the Vacation button and the Fridge button simultaneously for 3 seconds, all buttons will be locked. The Water dispenser lever and the Ice lever will not work either. To cancel this function, Press these two buttons for 3 seconds again.
07 Fridge button	Press the Fridge button to set the fridge to your desired temperature. You can set temperature between 1 °C and 7 °C.
08 Door open function	If the fridge or the freezer door is open, the Door Open icon is lit. If the condition that generates a door alarm is satisfied because the fridge or the freezer door is open, the Door Open icon blinks.
Cooling OFF Mode	Cooling Off mode (also called Shop mode), is designed for use by retailers when they are displaying refrigerators on the shop floor. In Cooling Off mode, the refrigerator's fan motor and lights work normally, but the compressors do not run, and the refrigerator and freezer do not get cold. To start Cooling Off mode, touch and hold the Power Freeze button and the Freezer button and the Vacation button for 5 seconds during normal operation. The refrigerator chime sounds and the temperature display flashes OFF. To cancel Cooling Off mode, touch and hold the Power Freeze and the Freezer and the Vacation buttons again for 5 seconds.

 **NOTE**

When you use Power Freeze the energy consumption of the refrigerator will increase. Remember to turn it off when you don't need it and return the freezer to your original temperature setting.

If you need to freeze large amount of food stuff, activate Power Freeze function at least 20 hours before.

Operating

Display Off Function

To energy conservation the Panel Display turns off automatically under the following conditions:

When no button has been pressed, when no doors are open, or when no Dispenser Lever has been pushed.

However, the icon indicating your Vacation or Cubed / Crushed / Ice Off, will stay on.

When you press a button, open a door, or push Dispenser Lever, the Panel Display will turn on again.

Except for the Ice Type button, all function buttons will become operational after you remove your finger from the button you are currently pressing.

Controlling the temperature

Controlling the Freezer temperature

The freezer temperature can be set between -15 °C and -23 °C to suit your particular needs. Press the Freezer button repeatedly until the desired temperature is shown in the temperature display. Keep in mind that foods like ice cream may melt at -16 °C.

The temperature display will move sequentially from -15 °C and -23 °C. When the display reaches -23 °C, it will begin again at -15 °C.

Five seconds after the new temperature is set the display will again show the actual current freezer temperature. However, this number will change as the Freezer adjusts to the new temperature.

NOTE

Bottom drawer in freezer is two star section.

The Bottom door guard and Middle door guard in their freezer are two star section. So, the Temperature in the two star sections are slightly higher than other freezer compartment.

Controlling the fridge temperature

The refrigerator temperature can be set between 7 °C and 1 °C to suit your particular needs. Press the Fridge button repeatedly until the desired temperature is shown in the temperature display.

The temperature control process for the Fridge works just like the Freezer process. Press the Fridge button to set your desired temperature.

After a few seconds, the Fridge will begin tracking towards the newly set temperature.

This will be reflected in the digital display.

NOTE

The temperature of the freezer or the refrigerator may rise from opening the doors too frequently, or if a large amount of warm or hot food is placed in either side.


This may cause the digital display to blink. Once the freezer and refrigerator return to their normal set temperatures the blinking will stop.

If the blinking continues, you may need to “reset” the refrigerator.

Try unplugging the appliance, wait about 10 minutes and then plug back in.

Using the ice and cold water dispenser

Press the Ice Type button to select the type of ice you want

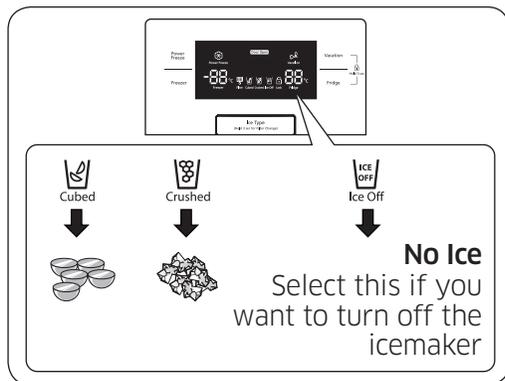

NOTE

Ice is made in cubes. When you select **Crushed**, the icemaker grinds the ice cubes into crushed ice.

Dispensing ice

Place your glass underneath the ice outlet and push gently against the ice dispenser lever with your glass. Make sure the glass is in line with the dispenser to prevent the ice from bouncing out.

Using the Water Dispenser

Place a glass underneath the water outlet and push gently against the water dispenser lever with your glass. Make sure the glass is in line with the dispenser to prevent the water from splashing out.

WARNING

- Do not put your fingers, hands or any other unsuitable objects in the chute or ice-maker bucket.
- It may result in personal injury or material damage.
- Never put finger or any other objects in the dispenser opening.
- It may cause injury.
- Use only the ice maker provided with the refrigerator.

- The water supply to this refrigerator must only be installed/connected by a suitably qualified person and connect to a potable water supply only.
- In order to operate the ice maker properly, water pressure of 138 ~ 862 kPa is required.

CAUTION

- If you have a long vacation or business trip and won't use water or ice dispensers, close the water valve.
- Otherwise, water leakage may occur.
- Wipe excess moisture from the inside and leave the doors open.
- Otherwise, odor and mold may develop.

Operating


Parts and features




<p>01 Ice maker bucket</p>	<p>Designed to store lots of easily.</p> <p>⚠ WARNING Do not put your fingers, hands or any other objects in the ice chute or the ice maker bucket. This may result in personal injury or material damage.</p>
<p>02 Multipurpose Freezer Compartments</p>	<p>Features tall freezer compartments for more efficient food storage. Do not use these compartments for ice cream or items you intend to store for a long time.</p>
<p>03 Freezer shelves</p>	<p>Use for storing meat, fish, frozen dumplings, ice cream and other types of frozen food.</p>

04 Drawers	Best used to store meats or dry foods. Stored food should be wrapped securely using foil or other suitable wrapping materials or containers.
05 Refrigerator shelves	Use for storing general types of food that require refrigeration.
06 Door bins	Designed to handle large, bulky items such as gallons of milk or other large bottles and containers.
07 Fruit & vegetable drawer	Used to preserve the freshness of your stored vegetables and fruits. It has been specifically designed to control the level of humidity within the drawer.

Operating

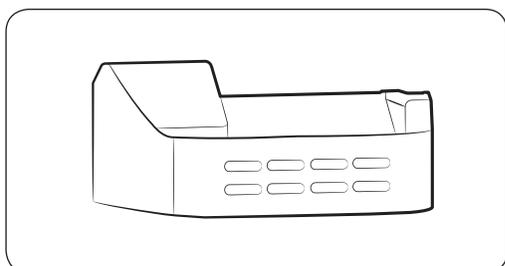

GUARD FRE-UPP (Optional)

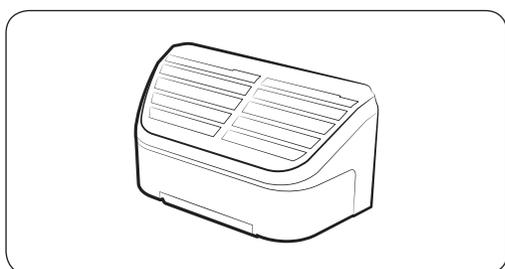


COVER-ICE MAKER

NOTE


For more space, you can store food with Guard FRE-UPP instead of the ice bucket, and remove the COVER-ICE MAKER. If you remove the ice bucket, ICE OFF will blink on the display panel. Furthermore, you can remove the freezer Upper drawer since it does not affect thermal and mechanical characteristics. A declared storage volume of frozen food storage compartment is calculated with “Guard FRE-UPP” positioned and “COVER-ICE MAKER”, “Upper Drawer” removed.

Removing the freezer accessories

Cleaning and rearranging the interior of the freezer is simple.

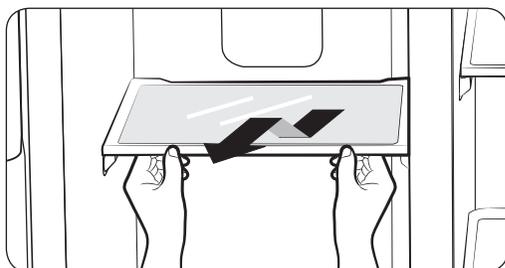


1. Remove the Glass shelf by pulling the shelf out as far as it will go. Then, gently lift it up and remove it.

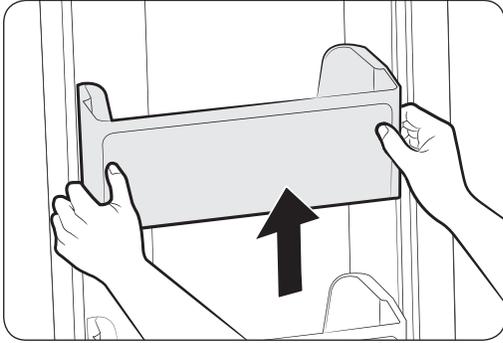

2. Remove the door bin by holding the door bin with both hands and then gently lift it up.



3. Remove the Plastic drawer by pulling it out and slightly lifting it up.

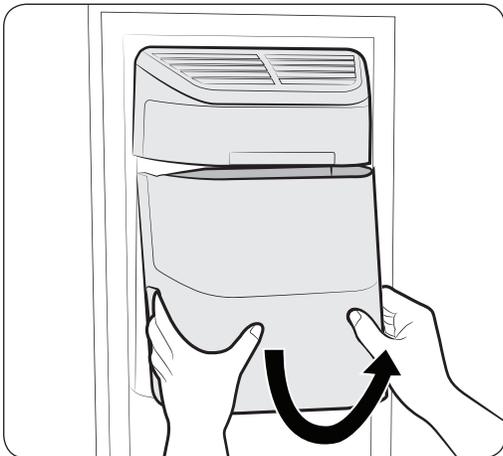

4. Ice bucket (freezer)
Remove the Icemaker Bucket by lifting up and pulling it out slowly.
 - Grip the handle as shown in the figure
 - Lift the low part slightly
 - Take the ice bucket out slowly.


 **NOTE**

Do not use excessive force when removing the cover.


Otherwise, the cover may break and cause injury.

Operating

Removing the fridge accessories

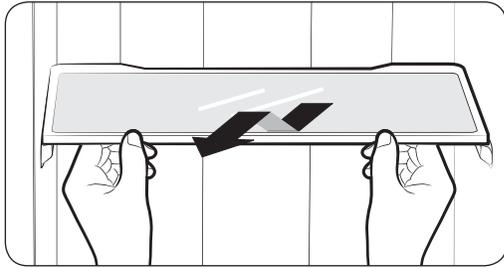


1. Remove the spill Proof Glass Shelf by pulling the shelf out as far as it will go. Then, gently lift it up and gently remove it.

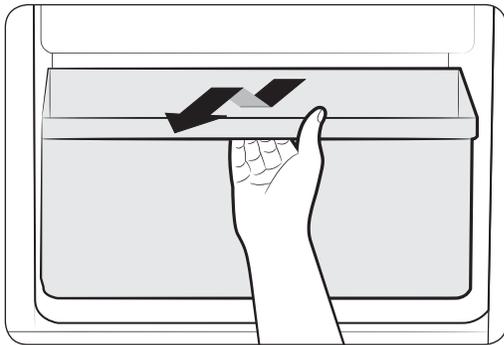

2. Remove the Vegetable & Fruit Drawer by pressing on the indentations found on the inside left and right sides of the Veggie Box/Dry Box cover and remove by pulling forward.

Holding the drawer with one hand, lift it up a little bit while pulling it forward and take it out of the refrigerator.

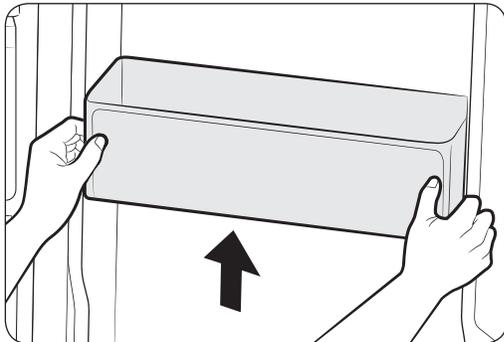

3. Remove the Gallon Door Bin by holding the bin with both hands and gently lifting it up.

NOTE

Before removing any accessories, make sure that no food is in the way. When possible, remove the food altogether to reduce the risk of accidents.

Cleaning the refrigerator

WARNING

Do not use Benzene, Thinner or Clorox™ for cleaning. They may damage the surface of the appliance and can create a risk of fire.

CAUTION

Do not spray the refrigerator with water while it is plugged in, as it may cause an electric shock.

Do not clean the refrigerator with benzene, thinner or car detergent for risk of fire.

Replacing the interior light

NOTE

For LED lamp, please contact service engineer to replace it.

Changing the water filter

WARNING

To reduce risk of water damage to your property DO NOT use generic brands of water filters in your SAMSUNG Refrigerator. USE ONLY SAMSUNG BRAND WATER FILTERS. SAMSUNG will not be legally responsible for any damage, including, but not limited to property damage caused by water leakage from use of a generic water filter. SAMSUNG Refrigerators are designed to work ONLY WITH SAMSUNG Water Filter.

The “Filter Indicator” light lets you know when it is time to change your water filter cartridge.

When the filter indicator light changes to red, it is time to change the filter.


To give you some time to get a new filter, the light will come on up just before the capacity of the current filter runs out.

Changing the filter on time provides you with the freshest, cleanest water from your fridge.

Operating

NOTE

For Exterior model



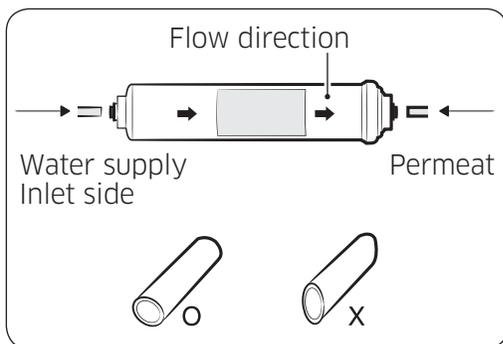


1. Shut off water supply.
2. Note the Flow direction on the filter.
3. Insert water supply tube into the inlet side of the filter until the tube stop.


NOTE

You must also ensure that the cut is square and not at any sort of angle as this could cause a leak

4. After inserting tube, put together the clip strongly. The Clip fix the tube.

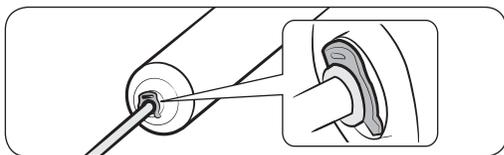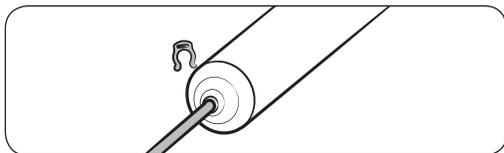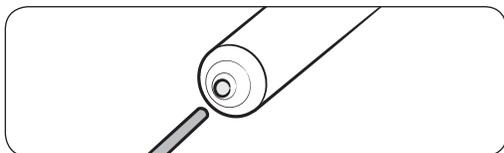

5. Turn on the water and check for leaks. If leaks occur, repeat step 1,2,3,4. If leaks persist, discontinue use and call your supporting dealer.
6. Once you have completed this process, hold the Ice Type button for 3 seconds to reset the filter schedule.

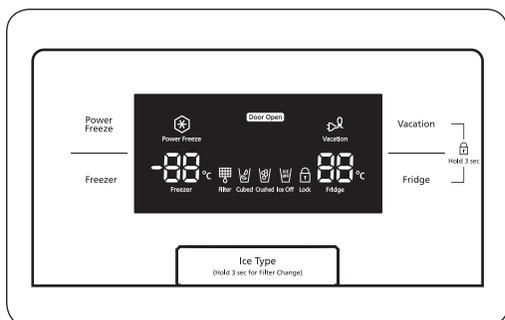

7. Lastly, Dispense 1 L of water through water dispenser and throw away. Make sure that water flows clearly again before drinking.

NOTE

A newly installed water filter cartridge may cause water to briefly spurt from the water dispenser. This is due to air getting into the line. It should pose no problem to operation.

Ordering replacement filters

To order more water filter cartridges, contact your authorized Samsung dealer.

- External Filter - HAFEX/EXP

Troubleshooting


Problem	Action
The refrigerator does not work at all or it does not chill sufficiently.	<ul style="list-style-type: none"> • Check that the power plug is properly connected. • Is the temperature control on the display panel set to the correct temperature? Try setting it to a lower temperature. • Is the refrigerator in direct sunlight or located too near a heat source? If so, it may not be able to cool sufficiently. Install it in a location that is out of direct sunlight and not near a heat source. • Is the back of the refrigerator too close to the wall, preventing proper ventilation? If so, it may not be able to cool sufficiently. Keep it an appropriate distance from the wall. • Is there too much food inside so that the food is blocking the outlet vent? To keep the refrigerator at a suitable temperature, do not fill the refrigerator with too much food.
The food in the fridge is frozen.	<ul style="list-style-type: none"> • Is the temperature control on the display panel set to the correct temperature? Try setting it to a warmer temperature. • Is the temperature in the room very low? • Did you store the food with a high water content in the coldest part of the fridge? Try moving those items into the body of the fridge instead of keeping them in the CoolSelect Zone™ drawer.
You hear unusual noises or sounds.	<ul style="list-style-type: none"> • Check that the refrigerator is level and stable. • Is the back of the refrigerator too close to the wall and therefore keeping air from circulating? • Was anything dropped behind or under the refrigerator? • A “ticking” sound is heard from inside the refrigerator. This is normal and occurs because various accessories are contracting or expanding in relation to the temperature of the refrigerator interior.
The front corners of the appliance are hot and condensation is occurring.	<ul style="list-style-type: none"> • Some heat is normal as anti-condensators are installed in the front corners of the refrigerator to prevent condensation. • Is the refrigerator door ajar? Condensation can occur when you leave the door open for a long time.

Problem	Action
Ice is not dispensing.	<ul style="list-style-type: none"> • Did you wait for 12 hours after installation of the water supply line before making ice? It may take longer to make ice if it is not sufficiently cool, such as when first installed. • Is the water line connected and the shut-off valve open? • Did you manually stop the ice making function? Make sure Ice Type is set to Cubed or Crushed. • Is there any ice blocked within the ice maker bucket? • Is the freezer temperature too warm? Try setting the freezer temperature lower.
You can hear water bubbling in the refrigerator.	<ul style="list-style-type: none"> • This is normal. The bubbling comes from the refrigerant coolant liquid circulating through the refrigerator.
There is a bad smell in the refrigerator.	<ul style="list-style-type: none"> • Has a food item spoiled? • Make sure that strong smelling food (for example, fish) is wrapped so that it is airtight. • Clean out your freezer periodically and throw away any spoiled food. When cleaning the inside of the fridge, store food elsewhere and unplug the appliance. Wipe with a dry dishcloth after 2-3 hours and then circulate air inside the refrigerator.
Frost forms on the walls of the freezer.	<ul style="list-style-type: none"> • Is the air vent blocked? Remove any obstructions so air can circulate freely. • Allow sufficient space between the foods stored for efficient air circulation. • Is the freezer drawer closed properly? If the freezer drawer is not completely closed or is blocked, humidity from outside may enter and cause severe frost to form.

Troubleshooting

Problem	Action
Water dispenser is not functioning.	<ul style="list-style-type: none">• Is the water line connected and the shut-off valve open?• Has the water supply line tubing been crushed or kinked? Make sure the tubing is free and clear of any obstruction.• Is the water tank frozen because the refrigerator temperature is too low? Try selecting a warmer setting on the main display panel.• Check if the filter is properly installed. If it is not properly installed, the water dispenser may not work.

Circuit diagram

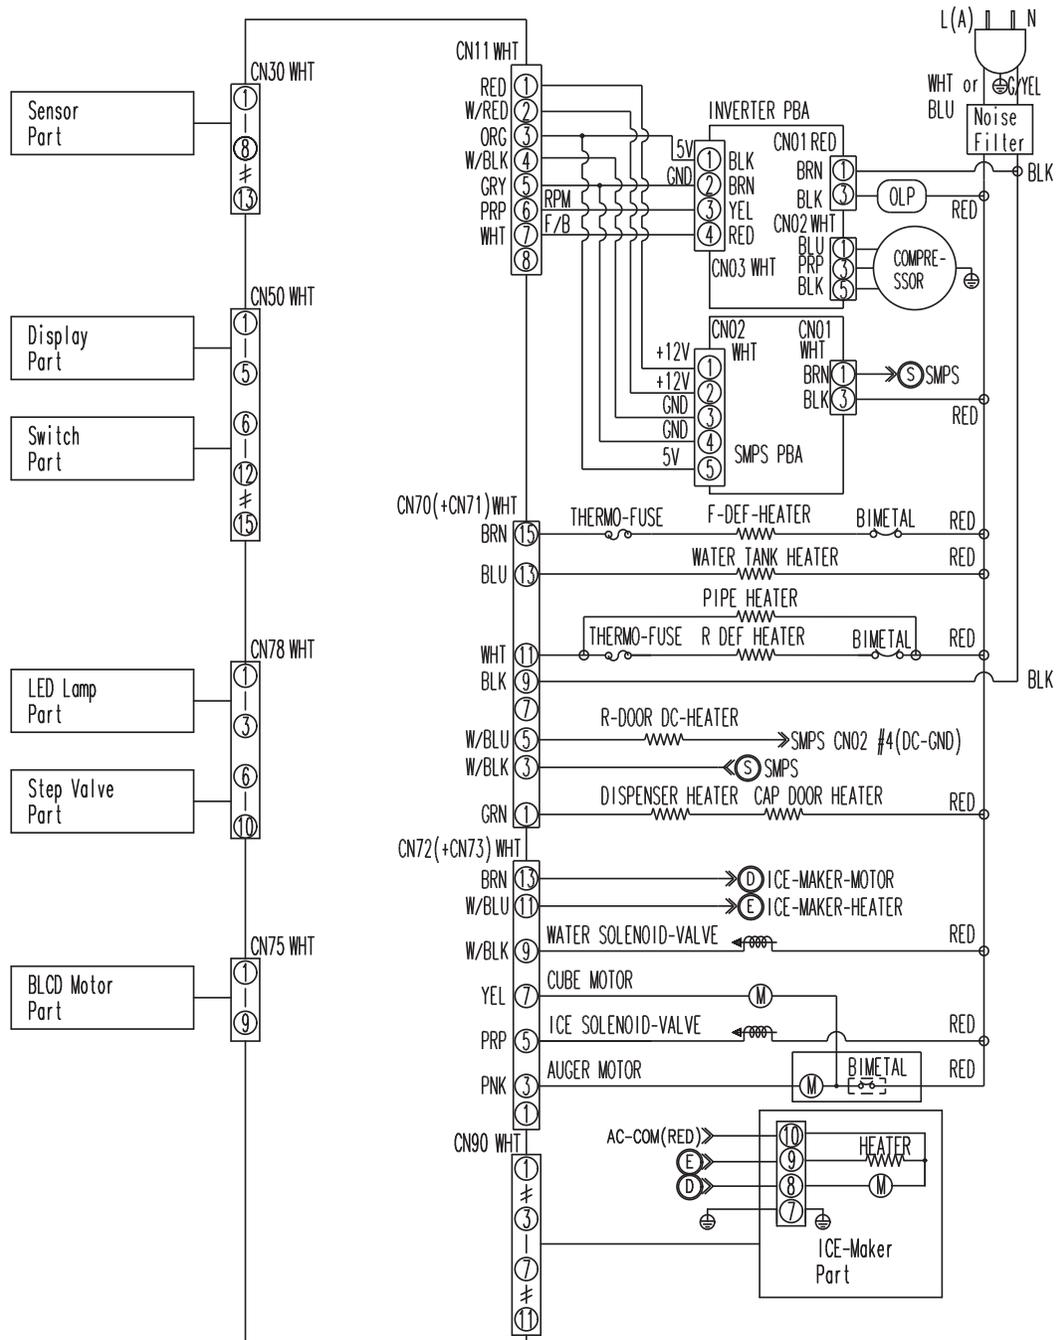

Memo

Ambient Room Temperature Limits

This refrigerator is designed to operate in ambient temperatures specified by its temperature class marked on the rating plate.

Class	Symbol	Ambient Temperature range (°C)	
		IEC 62552 (ISO 15502)	ISO 8561
Extended Temperate	SN	+10 to +32	+10 to +32
Temperate	N	+16 to +32	+16 to +32
Subtropical	ST	+16 to +38	+18 to +38
Tropical	T	+16 to +43	+18 to +43

-  Internal temperatures may be affected by such factors as the location of the fridge/freezer, ambient temperature and the frequency with which you open the door. Adjust the temperature as required to compensate for these factors.

Correct Disposal of This Product (Waste Electrical & Electronic Equipment)

(Applicable in countries with separate collection systems)

English



This marking on the product, accessories or literature indicates that the product and its electronic accessories (e.g. charger, headset, USB cable) should not be disposed of with other household waste at the end of their working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take these items for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product and its electronic accessories should not be mixed with other commercial wastes for disposal.



Contact SAMSUNG WORLD WIDE

If you have any questions or comments relating to Samsung products, please contact the SAMSUNG customer care center.

COUNTRY	CALL	OR VISIT US ONLINE AT
AUSTRIA	0800 - SAMSUNG (0800 - 7267864)	www.samsung.com/at/support
COLOMBIA	Bogotá 600 12 72 Gratis desde cualquier parte del país 01 8000 112 112 ó desde su celular #SAM(726)	www.samsung.com/co/support
EIRE	0818 717100	www.samsung.com/ie/support
MALAYSIA	1800-88-9999	www.samsung.com/my/support
NEW ZEALAND	0800 SAMSUNG (0800 726 786)	www.samsung.com/nz/support
PANAMA	800-7267 800-0101	www.samsung.com/latin/support (Spanish) www.samsung.com/latin_en/support (English)
PHILIPPINES	1-800-10-7267864 [PLDT] 1-800-8-7267864 [Globe landline and Mobile] 02-4222111 [Other landline]	www.samsung.com/ph/support
SINGAPORE	1800-SAMSUNG(726-7864)	www.samsung.com/sg/support
SOUTH AFRICA	0860-SAMSUNG (726-7864)	www.samsung.com/support
U.K	0330 SAMSUNG (7267864)	www.samsung.com/uk/support



DA68-03176A-00