


Hardware Maintenance Manual

Lenovo
LEGION

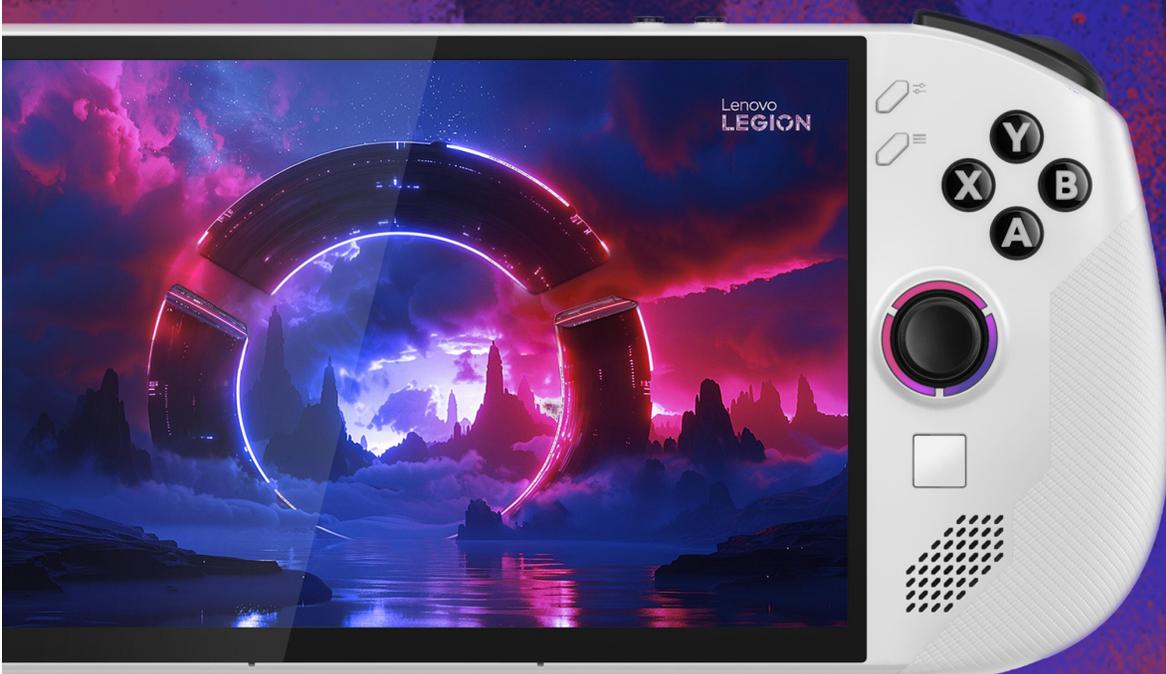

Lenovo

Lenovo Legion Go S (8", 1)

Second Edition (April 2025)

© Copyright Lenovo 2025.

Contents

About this manualiii	Remove the deco cover.	28
Chapter 1. Safety information.	1	Remove the bumper buttons.	29
General safety	1	Remove the B cover	29
Electrical safety	1	Remove the battery pack	31
Safety inspection guide	2	Remove the fan	32
Handling devices that are sensitive to electrostatic discharge	3	Remove the heat sink	33
Grounding requirements	4	Remove the SSD bracket, SSD, and SSD pad	34
Safety notices (multilingual translations)	4	Remove the right trigger button frame	35
Chapter 2. General checkout	19	Remove the right motor and right board	37
What to do first	19	Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button	38
CRU list	20	Remove the ABXY rubber and ABXY buttons	43
Chapter 3. Identifying FRUs (CRUs)	21	Remove the function buttons	44
Locate FRUs and CRUs	21	Remove the touchpad module	45
Chapter 4. Removing a FRU or CRU	25	Remove the RGB lights	46
Service tools	25	Remove the volume button bezel	47
General guidelines.	25	Remove the speakers	49
Handling thermal interface materials	26	Remove the power button.	49
Type, quantity, and areas of thermal interface materials application on the heat sink	26	Remove the EDP cable	50
Areas on the system board where thermal interface materials are applied	27	Remove the WiFi mylar and antennas	51
Disable the built-in battery.	27	Remove the system board, left UB_MB FFC, and right UB_MB FFC	53
Remove the joystick caps	27	Write key product information to a replacement system board.	55
		Remove the LCD module	55
		Appendix A. Label locations.	57
		Trademarkslix

About this manual

This manual contains service and reference information for the following Lenovo products.

Table 1. Product model name and machine type

Model name	Machine type (MT)
<ul style="list-style-type: none">Legion Go S 8ARP1Lenovo Legion Go S 8ARP1 1	83L3
<ul style="list-style-type: none">Legion Go S 8APU1Lenovo Legion Go S 8APU1 1	83N6

Important:

- It is recommended that these products be repaired by trained service technicians. For customers electing to repair their own Lenovo products, please follow all instructions carefully.
- Before servicing a Lenovo product, be sure to read all the information under Chapter 1 “Safety information” on page 1.

Chapter 1. Safety information

This chapter presents the following safety information that you need to be familiar with before you service a Lenovo notebook computer.

General safety

Follow these rules to ensure general safety:

- Observe good housekeeping in the area of the machines during and after maintenance.
- When lifting any heavy object:
 1. Make sure that you can stand safely without slipping.
 2. Distribute the weight of the object equally between your feet.
 3. Use a slow lifting force. Never move suddenly or twist when you attempt to lift.
 4. Lift by standing or by pushing up with your leg muscles; this action removes the strain from the muscles in your back. *Do not attempt to lift any object that weighs more than 16 kg (35 lb) or that you think is too heavy for you.*
- Do not perform any action that causes hazards to the customer, or that makes the equipment unsafe.
- Before you start the machine, make sure that other people are not in a hazardous position.
- Place removed covers and other parts in a safe place, away from all personnel, while you are servicing the machine.
- Keep your tool case away from walk areas so that other people will not trip over it.
- Do not wear loose clothing that can be trapped in the moving parts of a machine. Make sure that your sleeves are fastened or rolled up above your elbows. If your hair is long, fasten it.
- Insert the ends of your necktie or scarf inside clothing or fasten it with a non-conductive clip, about 8 centimeters (3 inches) from the end.
- Do not wear jewelry, chains, metal-frame eyeglasses, or metal fasteners for your clothing.

Attention: Metal objects are good electrical conductors.

- Wear safety glasses when you are hammering, drilling, soldering, cutting wire, attaching springs, using solvents, or working in any other conditions that might be hazardous to your eyes.
- After service, reinstall all safety shields, guards, labels, and ground wires. Replace any safety device that is worn or defective.
- Reinstall all covers correctly before returning the machine to the customer.
- Fan louvers on the machine help to prevent overheating of internal components. Do not obstruct fan louvers or cover them with labels or stickers.

Electrical safety

Observe the following rules when working on electrical equipment.

Important: Use only approved tools and test equipment. Some hand tools have handles covered with a soft material that does not insulate you when working with live electrical currents. Many customers have, near their equipment, rubber floor mats that contain small conductive fibers to decrease electrostatic discharges. Do not use this type of mat to protect yourself from electrical shock.

- Find the room emergency power-off (EPO) switch, disconnecting switch, or electrical outlet. If an electrical accident occurs, you can then operate the switch or unplug the power cord quickly.
- Do not work alone under hazardous conditions or near equipment that has hazardous voltages.
- Disconnect all power before:
 - Performing a mechanical inspection
 - Working near power supplies
 - Removing or installing main units

- Before you start to work on the machine, unplug the power cord. If you cannot unplug it, ask the customer to power-off the wall box that supplies power to the machine, and to lock the wall box in the off position.
- If you need to work on a machine that has *exposed* electrical circuits, observe the following precautions:
 - Ensure that another person, familiar with the power-off controls, is near you.

Attention: Another person must be there to switch off the power, if necessary.

- Use only one hand when working with powered-on electrical equipment; keep the other hand in your pocket or behind your back.

Attention: An electrical shock can occur only when there is a complete circuit. By observing the above rule, you may prevent a current from passing through your body.

- When using testers, set the controls correctly and use the approved probe leads and accessories for that tester.
- Stand on suitable rubber mats (obtained locally, if necessary) to insulate you from grounds such as metal floor strips and machine frames.

Observe the special safety precautions when you work with very high voltages; Instructions for these precautions are in the safety sections of maintenance information. Use extreme care when measuring high voltages.

- Regularly inspect and maintain your electrical hand tools for safe operational condition.
- Do not use worn or broken tools and testers.
- *Never assume* that power has been disconnected from a circuit. First, *check* that it has been powered off.
- Always look carefully for possible hazards in your work area. Examples of these hazards are moist floors, non-grounded power extension cables, power surges, and missing safety grounds.
- Do not touch live electrical circuits with the reflective surface of a plastic dental mirror. The surface is conductive; such touching can cause personal injury and machine damage.
- Do not service the following parts *with the power on* when they are removed from their normal operating places in a machine:
 - Power supply units
 - Pumps
 - Blowers and fans
 - Motor generators
 - Similar units as listed above

This practice ensures correct grounding of the units.

- If an electrical accident occurs:
 - Use caution; do not become a victim yourself.
 - Switch off power.
 - Send another person to get medical aid.

Safety inspection guide

The purpose of this inspection guide is to assist you in identifying potentially unsafe conditions. As each machine was designed and built, required safety items were installed to protect users and service technicians from injury. This guide addresses only those items. You should use good judgment to identify potential safety hazards due to attachment of non-Lenovo features or options not covered by this inspection guide.

If any unsafe conditions are present, you must determine how serious the apparent hazard could be and whether you can continue without first correcting the problem.

Consider these conditions and the safety hazards they present:

- Electrical hazards, especially primary power (primary voltage on the frame can cause serious or fatal electrical shock)
- Explosive hazards, such as a damaged cathode ray tube (CRT) face or a bulging capacitor
- Mechanical hazards, such as loose or missing hardware

To determine whether there are any potentially unsafe conditions, use the following checklist at the beginning of every service task. Begin the checks with the power off, and the power cord disconnected.

Checklist:

1. Check exterior covers for damage (loose, broken, or sharp edges).
2. Power off the computer. Disconnect the power cord.
3. Check the power cord for:
 - a. A third-wire ground connector in good condition. Use a meter to measure third-wire ground continuity for 0.1 ohm or less between the external ground pin and the frame ground.
 - b. The power cord should be the authorized type specified for your computer. Go to: <http://www.lenovo.com/serviceparts-lookup>
 - c. Insulation must not be frayed or worn.
4. Check for cracked or bulging batteries.
5. Remove the cover.
6. Check for any obvious non-Lenovo alterations. Use good judgment as to the safety of any non-Lenovo alterations.
7. Check inside the unit for any obvious unsafe conditions, such as metal filings, contamination, water or other liquids, or signs of fire or smoke damage.
8. Check for worn, frayed, or pinched cables.
9. Check that the power-supply cover fasteners (screws or rivets) have not been removed or tampered with.

Handling devices that are sensitive to electrostatic discharge

Any computer part containing transistors or integrated circuits (ICs) should be considered sensitive to electrostatic discharge (ESD). ESD damage can occur when there is a difference in charge between objects. Protect against ESD damage by equalizing the charge so that the machine, the part, the work mat, and the person handling the part are all at the same charge.

Notes:

1. Use product-specific ESD procedures when they exceed the requirements noted here.
2. Make sure that the ESD protective devices you use have been certified (ISO 9000) as fully effective.

When handling ESD-sensitive parts:

- Keep the parts in protective packages until they are inserted into the product.
- Avoid contact with other people.
- Wear a grounded wrist strap against your skin to eliminate static on your body.
- Prevent the part from touching your clothing. Most clothing is insulative and retains a charge even when you are wearing a wrist strap.
- Use a grounded work mat to provide a static-free work surface. The mat is especially useful when handling ESD-sensitive devices.
- Select a grounding system, such as those listed below, to provide protection that meets the specific service requirement.

Note: The use of a grounding system to guard against ESD damage is desirable but not necessary.

- Attach the ESD ground clip to any frame ground, ground braid, or green-wire ground.
- When working on a double-insulated or battery-operated system, use an ESD common ground or reference point. You can use coax or connector-outside shells on these systems.
- Use the round ground prong of the ac plug on ac-operated computers.

Grounding requirements

Electrical grounding of the computer is required for operator safety and correct system function. Proper grounding of the electrical outlet can be verified by a certified electrician.

Safety notices (multilingual translations)

The safety notices in this section are provided in the following languages:

- English
- Arabic
- Brazilian Portuguese
- French
- German
- Hebrew
- Japanese
- Korean
- Spanish
- Traditional Chinese



DANGER

Before the computer is powered on after FRU replacement, make sure that all screws, springs, and other small parts are in place and are not left loose inside the computer. Verify this by shaking the computer and listening for rattling sounds. Metallic parts or metal flakes can cause electrical short circuits.



DANGER

Some standby batteries contain a small amount of nickel and cadmium. Do not disassemble a standby battery, recharge it, throw it into fire or water, or short-circuit it. Dispose of the battery as required by local ordinances or regulations. Use only the battery in the appropriate parts listing. Use of an incorrect battery can result in ignition or explosion of the battery.



DANGER

The battery pack contains small amounts of nickel. Do not disassemble it, throw it into fire or water, or short-circuit it. Dispose of the battery pack as required by local ordinances or regulations. Use only the battery in the appropriate parts listing when replacing the battery pack. Use of an incorrect battery can result in ignition or explosion of the battery.



DANGER

The lithium battery can cause a fire, an explosion, or a severe burn. Do not recharge it, remove its polarized connector, disassemble it, heat it above 100°C (212°F), incinerate it, or expose its cell contents to water. Dispose of the battery as required by local ordinances or regulations. Use only the battery in the appropriate parts listing. Use of an incorrect battery can result in ignition or explosion of the battery.



DANGER

If the LCD breaks and the fluid from inside the LCD gets into your eyes or on your hands, immediately wash the affected areas with water for at least 15 minutes. Seek medical care if any symptoms from the fluid are present after washing.



DANGER

To avoid shock, do not remove the plastic cover that protects the lower part of the inverter card.



DANGER

Though the main batteries have low voltage, a short-circuited or grounded battery can produce enough current to burn personnel or combustible materials.



DANGER

Unless hot swap is allowed for the FRU being replaced, do as follows before removing it: power off the computer, unplug all power cords from electrical outlets, remove the battery pack, and disconnect any interconnecting cables.



قبل اعادة تشغيل الحاسب بعد الانتهاء من استبدال FRU، تأكد من أنه قد تم اعادة كل من المسامير و السوست وكل الأجزاء الصغيرة الأخرى في أماكنهم ولم يتم ففدهم داخل الحاسب. ويمكن التحقق من ذلك عن طريق هز الحاسب والاستماع لأي صوت صاخب يصدر منه. قد تؤدي الأجزاء أو الرقائق المعدنية الى حدوث دائرة قصر.



تحتوي بعض البطاريات الاحتياطية على كمية صغيرة من مادتي النيكل والكادميوم. لا تقم بفك أو إعادة شحن البطارية الاحتياطية ولا تقم أيضا بالقاءها في النار أو الماء ولا تتسبب في احداث دائرة قصر بها. قم بالتخلص من البطارية كما هو موضح في القوانين المحلية. استخدم نوع البطارية المحدد والذي يوصى باستخدامه. حيث أنه قد يؤدي استخدام نوع بطارية غير صحيح الى اشتعالها أو انفجارها.



خطر

تحتوي حزمة البطارية على كمية صغيرة من مادة النيكل. لا تقم بفكها أو القاءها في النار أو الماء ولا تتسبب في احداث دائرة قصر بها. تخلص من حزمة البطارية وفقا لما هو موضح في القوانين المحلية. قم، عند استبدال حزمة البطارية، باستخدام الأنواع المحددة فقط والتي يوصى باستخدامها. حيث أنه قد يؤدي استخدام نوع بطارية غير صحيح الى اشتعالها أو انفجارها.



خطر

قد تتسبب بطارية الليثيوم في حدوث حريق أو انفجار أو حدوث حروق شديدة. لا تقم بإعادة شحن البطارية أو إزالة موصل الاستقطاب الخاص بها ولا تحاول أيضا فكها أو تسخينها لأكثر من ١٠٠ درجة مئوية (٢١٢ فهرنهايت) أو حرقها أو تعريض محتويات الخاتة الخاصة بها للماء. قم بالتخلص من البطارية وفقا لما هو موضح في القوانين المحلية. استخدم نوع البطارية المحدد والذي يوصى باستخدامه. حيث أنه قد يؤدي استخدام نوع بطارية غير صحيح الى اشتعالها أو انفجارها.



خطر

إذا ما انكسرت شاشة LCD ولامس السائل الداخلي عينيك أو يديك، قم في الحال بغسلهما بالماء لمدة لا تقل عن ١٥ دقيقة. إذا ما وجدت أي أعراض بعد الغسل اطلب عندئذ المساعدة الطبية.



خطر

لتجنب التعرض لأي صدمات، لا تقم بإزالة الغطاء البلاستيكي الذي يحمي الجزء الأسفل من بطاقة العاكس.



خطر

على الرغم من أن البطاريات الرئيسية يكون لها جهد منخفض، إلا أنه قد تقوم البطاريات التي حدث قصور بها أو التي تم توصيلها أرضيا بإصدار تيار يكفي لحدوث حروق للأفراد أو تعرض المواد القابلة للاشتعال للحريق.



خطر

ما لم يتم السماح بالتبديل الفوري لأي FRU الجاري استبداله بدون ضرورة اغلاق النظام، قم بتنفيذ ما يلي قبل ازالته. قم بإيقاف تشغيل الحاسب ونزع كل أسلاك الطاقة من المخارج الكهربائية وقم أيضا بإزالة حزمة البطارية ثم قم بفصل أي كابلات متصلة.



PERIGO

Antes de ligar o computador após a substituição da FRU, certifique-se de que todos os parafusos, molas e outras peças pequenas estejam no lugar e não estejam soltos dentro do computador. Verifique isso sacudindo o computador e procurando ouvir sons de peças soltas. Peças metálicas ou lascas de metal podem causar curto-circuito.



PERIGO

Algumas baterias reserva contêm uma pequena quantidade de níquel e cádmio. Não desmonte uma bateria reserva, recarregue-a, jogue-a no fogo ou na água, ou deixe-a entrar em curto-circuito. Descarte a bateria conforme requerido pelas leis ou regulamentos locais. Use somente a bateria nas partes listadas apropriadas. O uso de uma bateria incorreta pode resultar em combustão ou explosão da bateria.



PERIGO

O pacote da bateria contém uma pequena quantidade de níquel. Não o desmonte, jogue-o no fogo ou na água, ou deixe-o entrar em curto-circuito. Descarte o pacote da bateria conforme requerido pelas leis ou regulamentos locais. Use somente a bateria nas partes listadas apropriadas ao substituir o pacote da bateria. O uso de uma bateria incorreta pode resultar em combustão ou explosão da bateria.



PERIGO

A bateria de lítio pode causar incêndio, explosão ou graves queimaduras. Não a recarregue, remova seu conector polarizado, desmonte-a, aqueça-a acima de 100°C (212°F), incinere-a, ou exponha o conteúdo de sua célula à água. Descarte a bateria conforme requerido pelas leis ou regulamentos locais. Use somente a bateria nas partes listadas apropriadas. O uso de uma bateria incorreta pode resultar em combustão ou explosão da bateria.



PERIGO

Se o LCD quebrar e o fluido de dentro dele entrar em contato com seus olhos ou com suas mãos, lave as áreas afetadas imediatamente com água durante pelo menos 15 minutos. Procure cuidados médicos se algum sintoma causado pelo fluido surgir após a lavagem.



PERIGO

Para evitar choque elétrico, não remova a capa plástica que protege a parte inferior da placa inversora.



PERIGO

Embora as principais baterias possuam baixa voltagem, uma bateria em curto-circuito ou aterrada pode produzir corrente o bastante para queimar materiais de pessoal ou inflamáveis.



PERIGO

A menos que uma hot swap seja permitida para a FRU que está sendo substituída, faça o seguinte antes de removê-la: desligue o computador, desconecte todos os cabos de energia das tomadas, remova o pacote de baterias e desconecte quaisquer cabos de interconexão.



DANGER

Avant de remettre l'ordinateur sous tension après remplacement d'une unité en clientèle, vérifiez que tous les ressorts, vis et autres pièces sont bien en place et bien fixées. Pour ce faire, secouez l'unité et assurez-vous qu'aucun bruit suspect ne se produit. Des pièces métalliques ou des copeaux de métal pourraient causer un court-circuit.



DANGER

Certaines batteries de secours contiennent du nickel et du cadmium. Ne les démontez pas, ne les rechargez pas, ne les exposez ni au feu ni à l'eau. Ne les mettez pas en court-circuit. Pour les mettre au rebut, conformez-vous à la réglementation en vigueur. Lorsque vous remplacez la pile de sauvegarde ou celle de l'horloge temps réel, veillez à n'utiliser que les modèles cités dans la liste de pièces détachées adéquate. Une batterie ou une pile inappropriée risque de prendre feu ou d'exploser.



DANGER

La batterie contient du nickel. Ne la démontez pas, ne l'exposez ni au feu ni à l'eau. Ne la mettez pas en court-circuit. Pour la mettre au rebut, conformez-vous à la réglementation en vigueur. Lorsque vous remplacez la batterie, veillez à n'utiliser que les modèles cités dans la liste de pièces détachées adéquate. En effet, une batterie inappropriée risque de prendre feu ou d'exploser.



DANGER

La pile de sauvegarde contient du lithium. Elle présente des risques d'incendie, d'explosion ou de brûlures graves. Ne la rechargez pas, ne retirez pas son connecteur polarisé et ne la démontez pas. Ne l'exposez pas à une température supérieure à 100°C, ne la faites pas brûler et n'en exposez pas le contenu à l'eau. Mettez la pile au rebut conformément à la réglementation en vigueur. Une pile inappropriée risque de prendre feu ou d'exploser.



DANGER

Si le panneau d'affichage à cristaux liquides se brise et que vous recevez dans les yeux ou sur les mains une partie du fluide, rincez-les abondamment pendant au moins quinze minutes. Consultez un médecin si des symptômes persistent après le lavage.



DANGER

Afin d'éviter tout risque de choc électrique, ne retirez pas le cache en plastique protégeant la partie inférieure de la carte d'alimentation.



DANGER

Bien que le voltage des batteries principales soit peu élevé, le court-circuit ou la mise à la masse d'une batterie peut produire suffisamment de courant pour brûler des matériaux combustibles ou causer des brûlures corporelles graves.



DANGER

Si le remplacement à chaud n'est pas autorisé pour l'unité remplaçable sur site que vous remplacez, procédez comme suit avant de retirer l'unité : mettez l'ordinateur hors tension, débranchez tous les cordons d'alimentation des prises de courant, retirez le bloc de batterie et déconnectez tous les câbles d'interconnexion.



VORSICHT

Bevor nach einem FRU-Austausch der Computer wieder angeschlossen wird, muß sichergestellt werden, daß keine Schrauben, Federn oder andere Kleinteile fehlen oder im Gehäuse vergessen wurden. Der Computer muß geschüttelt und auf Klappergeräusche geprüft werden. Metallteile oder-splitter können Kurzschlüsse erzeugen.



VORSICHT

Die Bereitschaftsbatterie, die sich unter dem Diskettenlaufwerk befindet, kann geringe Mengen Nickel und Cadmium enthalten. Sie darf nur durch die Verkaufsstelle oder den IBM Kundendienst ausgetauscht werden. Sie darf nicht zerlegt, wiederaufgeladen, kurzgeschlossen, oder Feuer oder Wasser ausgesetzt werden. Die Batterie kann schwere Verbrennungen oder Verätzungen verursachen. Bei der Entsorgung die örtlichen Bestimmungen für Sondermüll beachten. Beim Ersetzen der Bereitschafts- oder Systembatterie nur Batterien des Typs verwenden, der in der Ersatzteilliste aufgeführt ist. Der Einsatz falscher Batterien kann zu Entzündung oder Explosion führen.



VORSICHT

Akkus enthalten geringe Mengen von Nickel. Sie dürfen nicht zerlegt, wiederaufgeladen, kurzgeschlossen, oder Feuer oder Wasser ausgesetzt werden. Bei der Entsorgung die örtlichen Bestimmungen für Sondermüll beachten. Beim Ersetzen der Batterie nur Batterien des Typs verwenden, der in der Ersatzteilliste aufgeführt ist. Der Einsatz falscher Batterien kann zu Entzündung oder Explosion führen.



VORSICHT

Die Systembatterie ist eine Lithiumbatterie. Sie kann sich entzünden, explodieren oder schwere Verbrennungen hervorrufen. Batterien dieses Typs dürfen nicht aufgeladen, zerlegt, über 100°C erhitzt oder verbrannt werden. Auch darf ihr Inhalt nicht mit Wasser in Verbindung gebracht oder der zur richtigen Polung angebrachte Verbindungsstecker entfernt werden. Bei der Entsorgung die örtlichen Bestimmungen für Sondermüll beachten. Beim Ersetzen der Batterie nur Batterien des Typs verwenden, der in der Ersatzteilliste aufgeführt ist. Der Einsatz falscher Batterien kann zu Entzündung oder Explosion führen.



VORSICHT

Die Leuchtstoffröhre im LCD-Bildschirm enthält Quecksilber. Bei der Entsorgung die örtlichen Bestimmungen für Sondermüll beachten. Der LCD-Bildschirm besteht aus Glas und kann zerbrechen, wenn er unsachgemäß behandelt wird oder der Computer auf den Boden fällt. Wenn der Bildschirm beschädigt ist und die darin befindliche Flüssigkeit in Kontakt mit Haut und Augen gerät, sollten die betroffenen Stellen mindestens 15 Minuten mit Wasser abgespült und bei Beschwerden anschließend ein Arzt aufgesucht werden.



VORSICHT

Aus Sicherheitsgründen die Kunststoffabdeckung, die den unteren Teil der Spannungswandlerplatine umgibt, nicht entfernen.



VORSICHT

Obwohl Hauptbatterien eine niedrige Spannung haben, können sie doch bei Kurzschluß oder Erdung genug Strom abgeben, um brennbare Materialien zu entzünden oder Verletzungen bei Personen hervorzurufen.



VORSICHT

Wenn ein Austausch der FRU bei laufendem Betrieb nicht erlaubt ist, gehen Sie beim Austausch der FRU wie folgt vor: Schalten Sie den Computer aus, ziehen Sie alle Netzkabel von den Netzsteckdosen ab, entfernen Sie den Akku und ziehen Sie alle miteinander verbundenen Kabel ab.



סכנה

למני הפעלת המחשב לאחר החלפת FRU יש לוודא שכל הברגים, הקפיצים, וחלקים קטנים אחרים נמצאים במקומם ואינם חופשיים לזוז בתוך המחשב. כדי לוודא זאת, יש לטלטל את המחשב ולחשיב לגילוי קולות שקשוק. חלקי או שבבי מתכת עלולים לגרום לקצרים חשמליים.



סכנה

סוללות המתנה מסוימות מכילות כמות קטנה של ניקל וקדמיום. אין למרק סוללת המתנה, לטעון אותה מחדש, להשליך אותה לאש או למים או לקצר אותה. יש לסלק את הסוללה כנדרש על ידי התקנות והחוקים המקומיים. יש להשתמש רק בסוללה המומייעה ברשימת החלקים המתאימה. שימוש בסוללה לא מתאימה עלול לגרום להצתה או התמוצות של הסוללה.



סכנה

מארוז הסוללה מכיל כמות קטנה של ניקל וקדמיום. אין למרק את מארוז הסוללה, להשליך אותו לאש או למים או לקצר אותו. יש לסלק את מארוז הסוללה כנדרש על ידי התקנות והחוקים המקומיים. יש להשתמש רק בסוללה המומייעה ברשימת החלקים המתאימה בזמן החלפת מארוז הסוללה. שימוש בסוללה לא מתאימה עלול לגרום להצתה או התמוצות של הסוללה.



סכנה

סוללת הליתיום עלולה לגרום לשריפה, להתמוצות או לכוויות קשות. אין לטעון אותה מחדש, לסלק את המחבר המקוטב שלה, למרק אותה או לחמם אותה לטמפרטורה העולה על 100 מעלות צלזיוס. אין לשרוף את הסוללה ואין לחשוף את תוכן התא למים. יש לסלק את הסוללה כנדרש בתקנות ובחוקים המקומיים. יש להשתמש רק בסוללה המומייעה ברשימת החלקים המתאימים. שימוש בסוללה אחרת עלול לגרום לסכנת שריפה או התמוצות.



סכנה

אם מסך הנביש הנוזלי (LCD) נשבר והנוזל מתוך המסך בא במגע עם עיניים או ידיים, שטפו את הזורים הנגועים מיד במים במשך 15 דקות לפחות. פנו לקבלת עזרה רפואית אם תסמינים הנובעים מחמגע עם הנוזל נמשכים לאחר השטיפה.



סכנה

כדי למנוע התחשמלות, אין להסיר את מכסה הפלסטיק המגן על חלקו התחתון של הכרטיס החפוף.



סכנה

אף שהסוללות הראשיות הן בעלות מתח נמוך, סוללה מקוצרת או מוארכת עלולה להפיק זרם מספיק לגרימת כוויות או להצתת חומרים דליקים.



סכנה

אלא אם כן מותרת 'יחלפה חמו' של ה-FRU המוחלף, פעלו כדלהלן לפני הסרתו: כבו את המחשב, נתקו את כל כבלי החשמל מחשקעים, הוציאו את מארז הסוללות ונתקו את כל הכבלים המחוברים.



החנה

FRU ה-Exchange, ThinkPad ה-电源を入れる前に、ねじ、バネ、その他の小さな部品がすべて正しい位置にあり、また ThinkPad の内部で緩んでいないことを確認してください。これを確認するには、ThinkPad を振って、カチャカチャと音がしないか確かめます。金属部品や金属破片はショートの原因になることがあります。



החנה

予備バッテリーの中には少量のニッケルとカドミウムが含まれているものがあります。したがって、予備バッテリーの分解、再充電、火または水の中への投棄、またはショートさせることは決して行わないでください。バッテリーを廃棄する場合は地方自治体の条例に従ってください。適切なパーツ・リストにあるバッテリーだけを使用してください。誤ったバッテリーを使用すると、バッテリーが発火したり、爆発したりすることがあります。



החנה

バッテリー・パックには少量のニッケルが含まれています。バッテリー・パックを分解したり、火または水の中に投げ込んだり、ショートさせないでください。バッテリー・パックの廃棄にあたっては、地方自治体の条例または規則に従ってください。バッテリー・パックを交換するときは、適切なパーツ・リストにあるバッテリーだけを使用してください。誤ったバッテリーを使用すると、バッテリーが発火したり、爆発したりすることがあります。



החנה

リチウム・バッテリーは、火災、爆発、または重症のやけどを引き起こすことがあります。バックアップ・バッテリーの充電、その極性コネクターの取り外し、バッテリー本体の分解、100°C (212°F) 以上の加熱、焼却、電池の中身を水に浸すことはしないでください。バッテリーを廃棄する場合は地方自治体の条例に従ってください。適切なパーツ・リストにあるバッテリーだけを使用してください。誤ったバッテリーを使用すると、バッテリーが発火したり、爆発したりすることがあります。



危険

LCD が破損し、LCD 中の液体が目に入ったり、手に触れたりした場合は、液体が触れた部分を少なくとも 15 分間洗い流してください。洗い流した後に、液体によって何らかの症状が現れた場合は、医師の治療を受けてください。



危険

感電を防ぐため、インバーター・カードの下部を保護しているプラスチック・カバーを外さないでください。



危険

メイン・バッテリーの電圧は低くても、ショートしたり、接地したバッテリーが、作業者にやけどを負わせたり、可燃物を燃やすだけの電流を発生させる場合があります。



危険

交換しようとしている FRU がホット・スワップに対応していない場合、それを取り外す前に、コンピューターの電源をオフにし、すべての電源コードをコンセントから抜き、バッテリー・パックを取り外して、相互接続しているケーブルをすべて切り離してください。



위험

FRU를 교체하고 나서 컴퓨터 전원을 켜기 전에 모든 나사, 스프링 및 기타 작은 부품들이 올바른 위치에 있는지, 컴퓨터 내부에 단단하게 연결되어 있는지 확인하십시오. 컴퓨터를 흔들어 달걀거리는 소리가 나지 않는지 확인하십시오. 금속 부품 또는 금속 조각은 누전을 일으킬 수 있습니다.



위험

일부 보조 배터리에는 소량의 니켈 및 카드뮴이 포함되어 있습니다. 보조 배터리를 분해하거나, 다시 충전하거나, 불 또는 물에 던지거나, 단락시키지 마십시오. 배터리 팩을 폐기할 때에는 해당 지역의 법률 규정을 따르십시오. 배터리 팩을 교체할 때에는 올바른 배터리만 사용하십시오. 올바른지 않은 배터리를 사용하면 배터리가 발화되거나 폭발할 수 있습니다.



위험

배터리 팩에는 소량의 니켈이 포함되어 있습니다. 배터리 팩을 분해하거나, 불 또는 물에 던지거나, 단락시키지 마십시오. 배터리 팩을 폐기할 때에는 해당 지역의 법률 규정을 따르십시오. 배터리 팩을 교체할 때에는 올바른 배터리만 사용하십시오. 올바르게 사용하지 않은 배터리를 사용하면 배터리가 발화되거나 폭발할 수 있습니다.



위험

리튬 배터리는 화재, 폭발 또는 심각한 화상을 일으킬 수 있습니다. 리튬 배터리를 다시 충전하거나, 극성 커넥터를 제거하거나, 분해하거나, 100C(212F) 이상으로 가열하거나, 소각하거나, 전지 내용물을 물에 노출시키지 마십시오. 배터리를 폐기할 때에는 해당 지역을 법률 규정을 따르십시오. 올바른 배터리만 사용하십시오. 올바르게 사용하지 않은 배터리를 사용하면 배터리가 발화되거나 폭발할 수 있습니다.



위험

LCD가 파손되어 LCD 내부의 액체가 눈에 들어가거나 손에 묻으면 즉시 깨끗한 물로 15분 이상 닦아 내십시오. 씻은 후에 조금이라도 이상을 느끼면 즉시 병원에 가서 의사의 진찰을 받아야 합니다.



위험

전기적 위험을 방지하려면 인버터 카드의 아래 부분을 보호하는 플라스틱 덮개를 제거하지 마십시오.



위험

기본 배터리의 전압은 낮지만, 단락되거나 접지된 배터리는 화상을 입히기에 충분한 전류와 가연성 물질을 발생시킬 수 있습니다.



위험

FRU 교체 시 Hot Swap이 지원되지 않는 경우, FRU를 제거하기 전에 컴퓨터의 전원을 끄고, 전기 콘센트에서 전원 코드를 분리하고, 배터리를 제거한 후, 연결된 모든 케이블을 분리하십시오.



PELIGRO

Antes de encender el sistema después de sustituir una FRU, compruebe que todos los tornillos, muelles y demás piezas pequeñas se encuentran en su sitio y no se encuentran sueltas dentro del sistema. Compruébelo agitando el sistema y escuchando los posibles ruidos que provocarían. Las piezas metálicas pueden causar cortocircuitos eléctricos.



PELIGRO

Algunas baterías de reserva contienen una pequeña cantidad de níquel y cadmio. No las desmonte, ni recargue, ni las eche al fuego o al agua ni las cortocircuite. Deséchelas tal como dispone la normativa local. Utilice sólo baterías que se encuentren en la lista de piezas. La utilización de una batería no apropiada puede provocar la ignición o explosión de la misma.



PELIGRO

Las baterías contienen pequeñas cantidades de níquel. No las desmonte, ni recargue, ni las eche al fuego o al agua ni las cortocircuite. Deséchelas tal como dispone la normativa local. Utilice sólo baterías que se encuentren en la lista de piezas al sustituir la batería. La utilización de una batería no apropiada puede provocar la ignición o explosión de la misma.



PELIGRO

La batería de repuesto es una batería de litio y puede provocar incendios, explosiones o quemaduras graves. No la recargue, ni quite el conector polarizado, ni la desmonte, ni caliente por encima de los 100°C (212°F), ni la incinere ni exponga el contenido de sus celdas al agua. Deséchela tal como dispone la normativa local.



PELIGRO

Si la LCD se rompe y el fluido de su interior entra en contacto con sus ojos o sus manos, lave inmediatamente las áreas afectadas con agua durante 15 minutos como mínimo. Obtenga atención medica si se presenta algún síntoma del fluido despues de lavarse.



PELIGRO

Para evitar descargas, no quite la cubierta de plástico que rodea la parte baja de la tarjeta invertida.



PELIGRO

Aunque las baterías principales tienen un voltaje bajo, una batería cortocircuitada o con contacto a tierra puede producir la corriente suficiente como para quemar material combustible o provocar quemaduras en el personal.



PELIGRO

Salvo que se permita el intercambio en caliente para la unidad sustituible localmente, realice lo siguiente antes de extraerla: apague el sistema, desconecte todos los cables de alimentación de las tomas de alimentación eléctrica, extraiga la batería y desconecte los cables de interconexión.



危險

完成 FRU 更換之後，在開啟電腦的電源之前，請確定所有螺絲、彈簧及其他小零件都已歸位，沒有遺留在電腦內部。
若要確認這一點，請搖晃電腦，聽聽看是否有卡嗒的聲音。
金屬零件或儀錶的火花會造成電線短路。



危險

部分備用電池含有微量的鎳和鎘。請勿拆開備用電池、再充電、丟入火或水中，或使其形成短路。請按照當地法令或規定來棄置電池。

僅限使用零件清單中的電池。使用不適當的電池會導致電池起火或爆炸。



危險

電池套件含有微量的鎳。請勿拆開電池套件、丟入火或水中，或使其形成短路。請按照當地法令或規定來棄置電池套件。

更換電池套件時，僅限使用零件清單中的電池。使用不適當的電池會導致電池起火或爆炸。



危險

鋰電池會導致起火、爆炸或嚴重燒傷。請勿再充電、拔除其電極接頭、拆開、加熱超過 100°C (212°F)、焚燒，或讓電池組成物浸到水。請按照當地法令或規定來棄置電池。

僅限使用零件清單中的電池。使用不適當的電池會導致電池起火或爆炸。



危險

如果 LCD 破裂導致 LCD 流出的液體沾到您的眼睛或手，請立即以清水沖洗沾染部位至少 15 分鐘。如果在清洗後出現該液體所造成的任何症狀，請就醫治療。



危險

為避免電擊，請勿拆下轉換卡下面的塑膠護蓋。



危險

雖然主電池的電壓很低，但短路或接地電池所產生的電流，仍足以使人燒傷或使可燃物質起火。



危險

除非 FRU 允許以熱抽換來替換，否則請依下列方式將其移除：將電腦關機，拔除插座上所有電源線，移除電池包，並拔開任何交互連接的線材。

Chapter 2. General checkout

This chapter contains the following topics:

Before you go to the checkout instructions, ensure that you read the following important notes.

Important notes:

- **It is recommended that only certified trained personnel perform service on the computer. For customers electing to repair their own machines, please follow all instructions carefully.**
- **Before replacing any FRU, read the entire page on removing and replacing FRUs.**
- **Be extremely careful during such write operations as copying, saving, or formatting.** Drives in the computer that you are servicing sequence might have been altered. If you select an incorrect drive, data or programs might be overwritten.
- **Replace a FRU only with another FRU of the correct model.** When you replace a FRU, make sure that the model of the machine and the FRU part number are correct by referring to the FRU parts list.
- **A FRU should not be replaced because of a single, unreproducible failure.** Single failures can occur for a variety of reasons that have nothing to do with a hardware defect, such as cosmic radiation, electrostatic discharge, or software errors. Consider replacing an FRU only when a problem recurs. If you suspect that a FRU is defective, clear the error log and run the test again. If the error does not recur, do not replace the FRU.
- **Be careful not to replace a nondefective FRU.**

What to do first

When you return a FRU, you must include the following information in the parts exchange form or parts return form that you attach to it:

1. Name and phone number of service technician
2. Date of service
3. Date on which the machine failed
4. Date of purchase
5. Failure symptoms, error codes appearing on the display, and beep symptoms
6. Procedure index and page number in which the failing FRU was detected
7. Failing FRU name and part number
8. Machine type, model number, and serial number
9. Customer's name and address

Note: During the warranty period, the customer may be responsible for repair costs if the computer damage was caused by misuse, accident, modification, unsuitable physical or operating environment, or improper maintenance by the customer. Following is a list of some common items that are not covered under warranty and some symptoms that might indicate that the system was subjected to stress beyond normal use.

Before checking problems with the computer, determine whether the damage is covered under the warranty by referring to the following list:

The following are not covered under warranty:

- LCD panel cracked from the application of excessive force or from being dropped
- Scratched (cosmetic) parts
- Distortion, deformation, or discoloration of the cosmetic parts

- Plastic parts, latches, pins, or connectors that have been cracked or broken by excessive force
- Damage caused by liquid spilled into the system
- Damage caused by the improper insertion of a personal-computer card (PC card) or the installation of an incompatible card
- Improper disc insertion or use of an external optical drive
- Fuses blown by attachment of a non-supported device
- Forgotten computer password (making the computer unusable)
- Sticky keys caused by spilling a liquid onto the keyboard
- Use of an incorrect ac power adapter on laptop products

The following symptoms might indicate damage caused by non-warranted activities:

- Missing parts might be a symptom of improper service or modification.
- Check for obvious damage to a hard disk drive. If the spindle of a hard disk drive becomes noisy, the hard disk drive might have been dropped or subject to excessive force.

CRU list

Table 2. CRU list of Legion Go S

CRU	Type
ac power adapter *	self-service
Power cord *	self-service
Joystick caps	optional-service

Note: Parts labeled with an asterisk (“*”) are available on selected product models.

Chapter 3. Identifying FRUs (CRUs)

Locate FRUs and CRUs

The exploded illustrations help Lenovo service technicians identify FRUs or CRUs that they may need to replace when servicing a customer's computer.

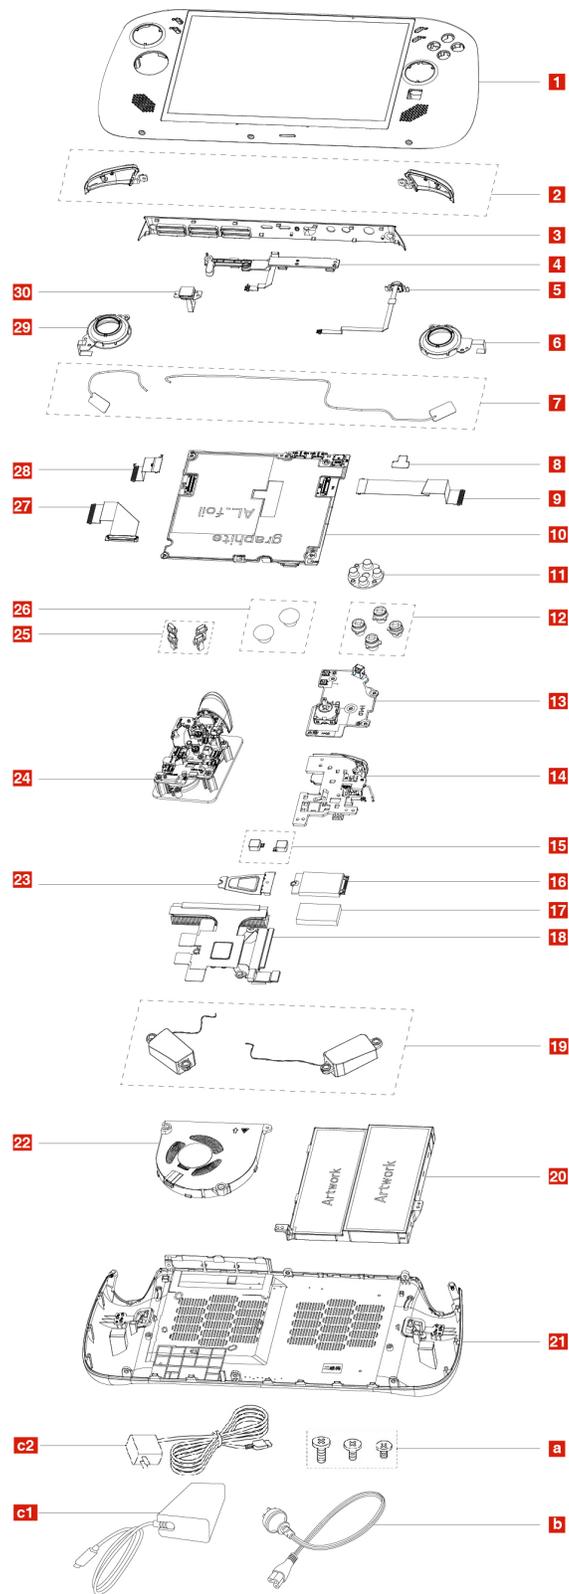


Figure 1. Exploded view

Table 3. FRU (CRU) categories

No.	FRU (CRU) category
1	LCD module
2	Bumper buttons
3	Deco cover
4	Volume button bezel
5	Power button
6	Right RGB light
7	Antennas
8	WiFi mylar
9	Right UB_MB FFC
10	System board and microSD card slot mylar
11	ABXY rubber
12	ABXY buttons
13	Right board
14	Right trigger button frame
15	Motors
16	SSD
17	SSD pad
18	Heat sink
19	Speakers
20	Battery pack
21	B cover
22	Fan
23	SSD bracket
24	Left controller assembly
25	Function buttons
26	Joystick caps
27	EDP cable
28	Left UB_MB FFC
29	Left RGB light
30	Touchpad module
a	Screw kit
b	Power cord *
c1	ac power adapter *
c2	ac power adapter *

Chapter 4. Removing a FRU or CRU

Service tools

The following table lists tools for servicing Lenovo computers. Tools with a cross mark are needed for servicing the product models as described by this publication. Prepare them before you service the product.

Table 4. Service tools

Service tool and consumable	Model applicability
Screw driver (Phillips head) (PH1/PH0)	X
Screw driver (Torx head) (T5)	
Screw driver (Torx head) (T30)	
Pry tool 1	X
Tweezers (conductive)	X
Tweezers (isolated)	
Suction cup	
Hexagonal socket	
Thermal interface materials	X
Acetate tape	
Polyamide tape	
Mylar tape	
Electrical tape	
Double-sided tape	
Conductive tape	
Eraser	
Heat gun	
Brown brush	

Notes:

- T30 screw drivers are used to service the new Intel Xeon CPUs.
- Hexagonal sockets are used to remove antenna connectors.

General guidelines

When removing or replacing a FRU, ensure that you observe the following general guidelines:

1. It is recommended that only certified trained personnel perform service on the computer. For customers electing to repair their own machines, please follow all instructions carefully.
2. Begin by removing any FRUs that have to be removed before replacing the failing FRU. Any such FRUs are listed at the beginning of each FRU replacement procedure. Remove them in the order in which they are listed.

3. Follow the correct sequence in the steps for removing a FRU, as shown in the illustrations by the numbers in square callouts.
4. When removing a FRU, move it in the direction as shown by the arrow in the illustration.
5. To install a new FRU in place, perform the removal procedure in reverse and follow any notes that pertain to replacement.
6. When replacing a FRU, carefully retain and reuse all screws.
7. When replacing the base cover, reapply all labels that come with the replacement base cover. If some original labels are not included with the replacement base cover, peel them off from the original base cover and paste them on the replacement base cover.



Before removing any FRU or CRU, disable the battery, unplug all power cords from electrical outlets, and wait about ten minutes to let the computer cool down.

Attention: After replacing a FRU, do not turn on the computer until you have ensured that all screws, springs, and other small parts are in place and none are loose inside the computer. Verify this by shaking the computer gently and listening for rattling sounds. Metallic parts or metal flakes can cause electrical short circuits.

Attention: The system board is sensitive to and can be damaged by ESD. Before touching it, establish personal grounding by touching a ground point with one hand or by using an ESD strap (P/N 6405959).

Handling thermal interface materials

Thermal interface materials are typically applied between a heat sink and a CPU (and/or GPU) die to enhance the heat transfer capability of the heat sink. If thermal interface materials are exposed during computer servicing, such as when replacing the heat sink or system board, it is important to handle the thermal interface materials properly.

- You need to completely remove the old thermal interface materials from the CPU and/or GPU die.
- You need to apply new thermal interface materials onto the heat sink according to the type, quantity, and application areas specified in this publication.

Type, quantity, and areas of thermal interface materials application on the heat sink

The table and figure below provide information on the type and quantity of thermal interface materials, as well as the specific areas on the heat sink where these materials should be applied.

Area	Type	Quantity
a	7958-SP	0.141 g, 17.25 mm × 13.82 mm × 0.2 mm



Figure 2. Areas on the heat sink where thermal interface materials should be applied

Areas on the system board where thermal interface materials are applied

The following figure shows the areas on the system board where thermal interface materials are applied.

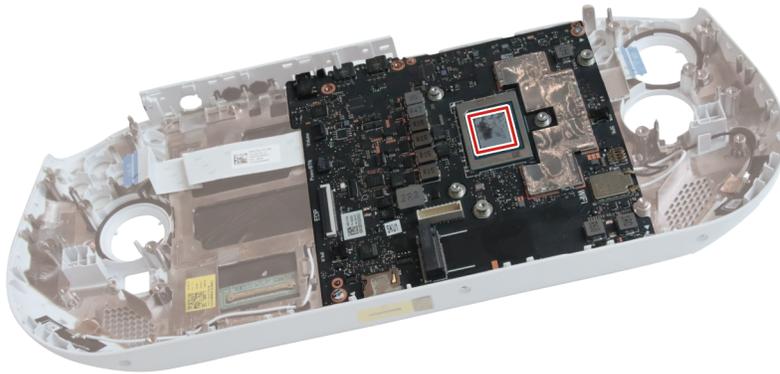


Figure 3. Areas on the system board where thermal interface materials are applied

Disable the built-in battery

Make sure your console is powered off.

- Step 1. While holding down , press the power button until the **Novo Button Menu** is displayed.
- Step 2. Select **BIOS Setup** from the Menu.
- Step 3. Select **More Settings**.
- Step 4. Select **Configuration** → **Disable Built-in battery**.
- Step 5. Select **Yes** in the **Setup Confirmation** window.

The built-in battery is disabled and the computer turns off automatically.

Remove the joystick caps

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

- Approximate time: 1–5 minutes
- Difficulty rating: Easy

Step 1. Remove the left joystick cap (1).

Attention: Be careful to avoid scratching the surface of the joystick cap.



Figure 4. Remove the joystick caps

Step 2. Remove the right joystick cap (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Joystick caps

Remove the deco cover

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Use a pry tool to pry the deco cover from the edge (1).



Figure 5. Remove the deco cover

Step 2. Remove the deco cover (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Deco cover

Remove the bumper buttons

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Remove two screws with a screw driver (1).

Note: It is recommended to use a magnetized screw driver to remove screws to avoid them falling into air vents.



Figure 6. Remove screws and remove bumper buttons

Table 5. Screws used to secure bumper buttons

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	5	1.85 ± 0.15	2

Step 2. Remove the bumper buttons (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Bumper buttons

Remove the B cover

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

- Approximate time: 10–20 minutes
- Difficulty rating: Easy

Step 1. Remove one screw (1) and loosen two screws (2) at the top of the console with a screw driver.

Note: It is recommended to use a magnetized screw driver to remove screws to avoid them falling into air vents.



Figure 7. Remove screws at the top

Table 6. Screws used at the top to secure B cover

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	3	1.85 ± 0.15	1

Step 2. Remove three screws at the bottom of the console (3).



Figure 8. Remove screws at the bottom

Table 7. Screws used at the bottom to secure B cover

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
3	M2	3	1.85 ± 0.15	3

Step 3. Use a pry tool to pry the B cover from the edge (4).



Figure 9. Remove the B cover

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

B cover

Remove the battery pack

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Disconnect the battery pack cable from the connector carefully (1).

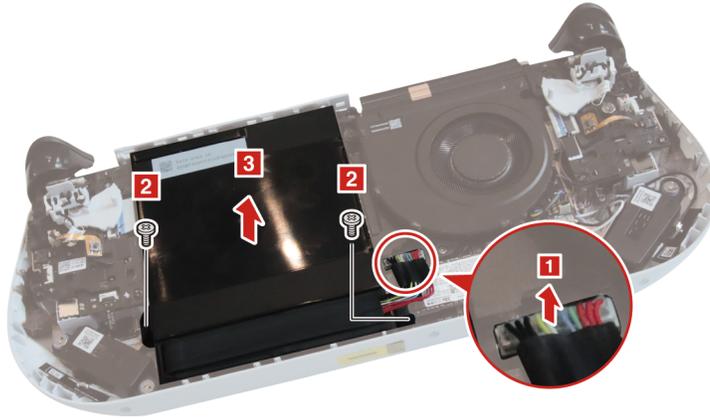


Figure 10. Disconnect the battery pack cable, remove screws, and remove the battery pack

Step 2. Remove two screws with a screw driver (2).

Table 8. Screws used to secure the battery pack

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
2	M2	5	1.85 ± 0.15	2

Step 3. Remove the battery pack (3).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Battery pack

Remove the fan

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Disconnect the fan cable from the connector carefully (1).

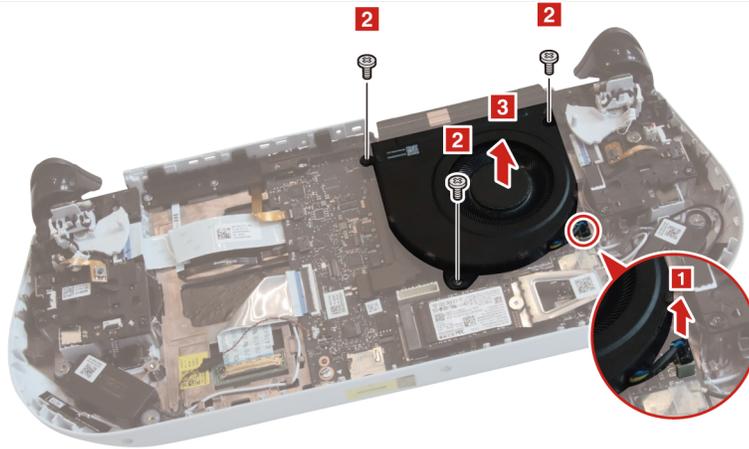


Figure 11. Disconnect the fan cable, remove screws, and remove the fan

Step 2. Remove three screws with a screw driver (2). Remove the fan (3).

Table 9. Screws used to secure the fan

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
2	M2	5	1.85 ± 0.15	3

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Fan

Remove the heat sink

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the fan” on page 32

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Remove three screws with a screw driver (1).

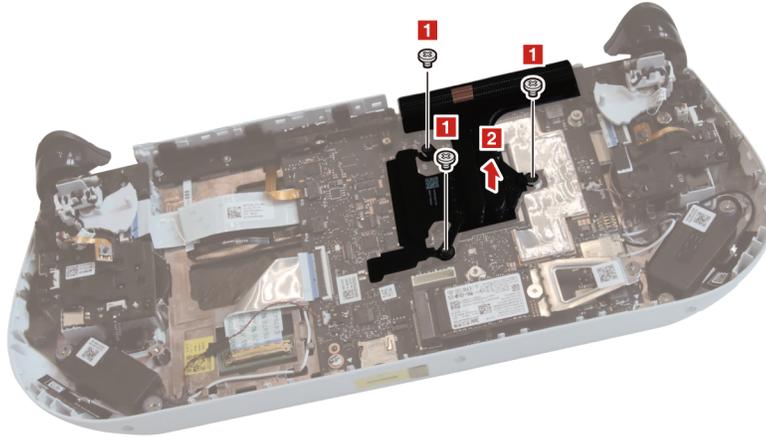


Figure 12. Remove screws and remove the heat sink

Table 10. Screws used to secure the heat sink

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M1.6	1.7	1.2 ± 0.1	3

Step 2. Remove the heat sink (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Heat sink

Remove the SSD bracket, SSD, and SSD pad

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

- Approximate time: 10–20 minutes
- Difficulty rating: Easy

Step 1. Remove two screws with a screw driver (1). Remove the SSD bracket (2).

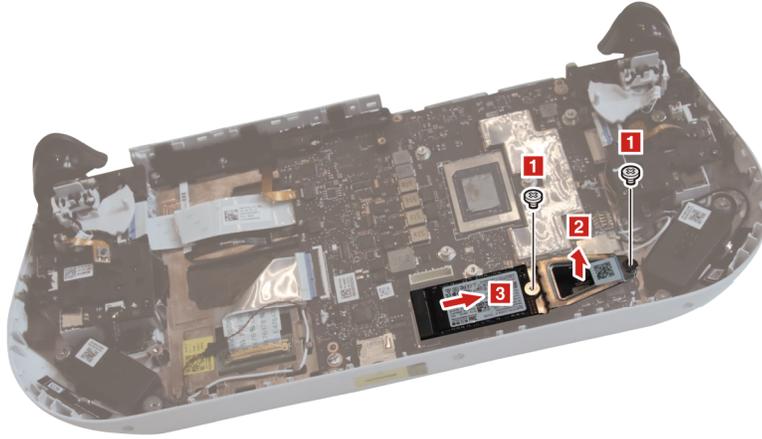


Figure 13. Remove screws, remove the SSD bracket, and remove the SSD

Table 11. Screws used to secure the SSD bracket

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	2	1.85 ± 0.15	2

Step 2. Remove the SSD from the SSD slot (3).

Step 3. Remove the SSD pad (4).

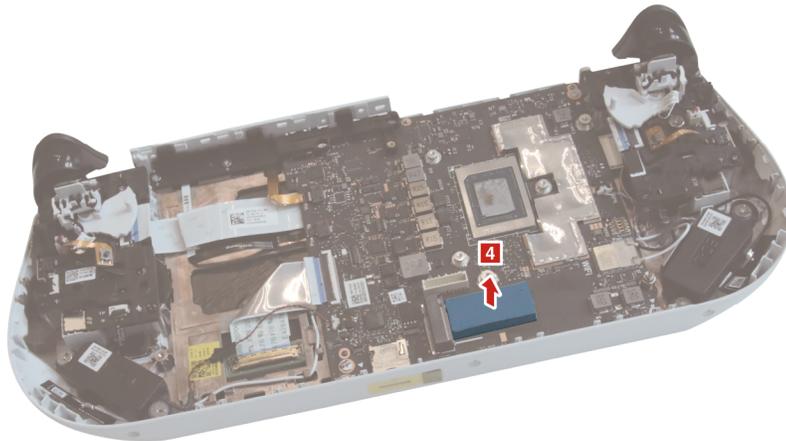


Figure 14. Remove the SSD pad

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

SSD bracket

SSD

SSD pad

Remove the right trigger button frame

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

- Approximate time: 10–20 minutes
- Difficulty rating: Moderate

Step 1. Disconnect the right SWT PCB cable from the connector (1). Lift the tab of the right back key FPC connector (2). Disconnect the right back key FPC from the connector (3). Make sure the range switch for the right trigger button has been toggled to the bottom (4).

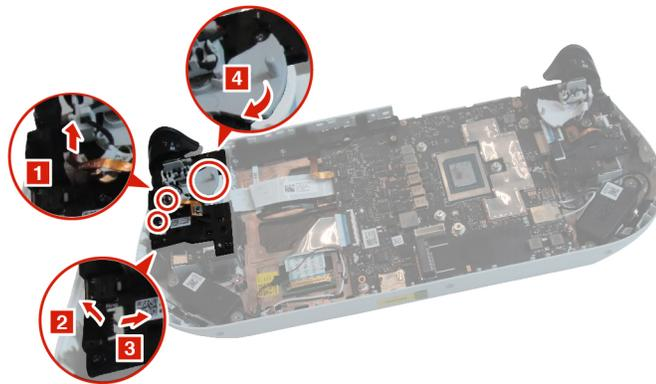


Figure 15. Disconnect the SWT PCB cable and disconnect the back key FPC

Step 2. Remove four screws (5) and loosen one screw with a screw driver (6). Remove the right trigger button frame (7).

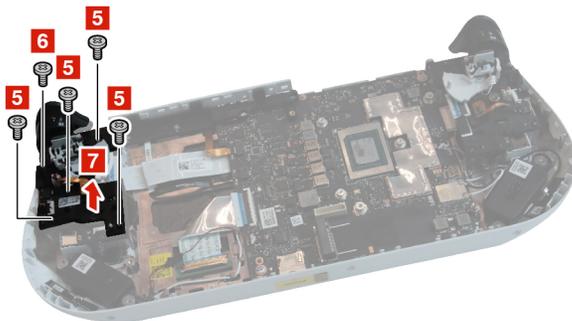


Figure 16. Remove screws and remove the right trigger button frame

Table 12. Screws used to secure the right trigger button frame

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
5	M2	5	1.85 ± 0.15	4

Step 3. Push the back key FPC with a plastic rod from the hole on the back (8). Remove the back key FPC (9).



Figure 17. Remove the back key FPC

Step 4. Release the SWT PCB cable out of the cable groove (10). Remove the SWT PCB (11).



Figure 18. Remove the SWT PCB

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Right trigger button frame

Remove the right motor and right board

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the right trigger button frame” on page 35

- Approximate time: 10–20 minutes
- Difficulty rating: Moderate

Step 1. Remove the right motor (1).

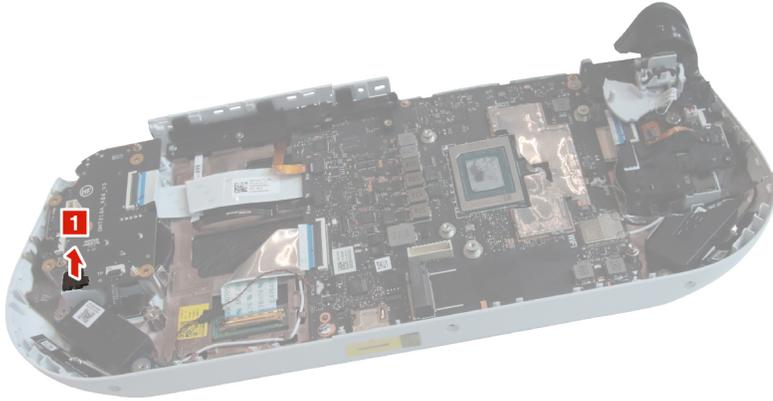


Figure 19. Remove the right motor

- Step 2. Lift the tab of the right UB_Ring FPC connector (2). Disconnect the right UB_Ring FPC from the connector (3).

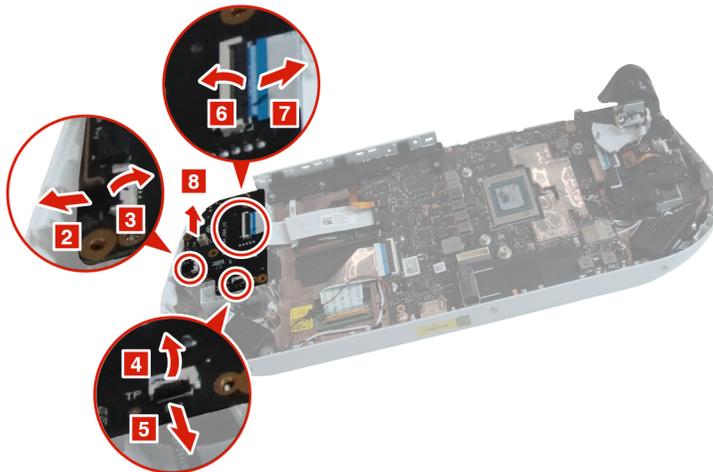


Figure 20. Disconnect the UB_Ring FPC, disconnect the MB_UB FFC, disconnect the touchpad board cable, and remove the right board

- Step 3. Lift the tab of the touchpad board cable connector (4). Disconnect the touchpad board cable from the connector (5).
- Step 4. Lift the tab of the right MB_UB FFC connector (6). Disconnect the right MB_UB FFC from the connector (7).
- Step 5. Remove the right board (8).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Motors

Right board

Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

- Approximate time: 30–60 minutes
- Difficulty rating: Difficult

Step 1. Disconnect the left SWT PCB cable from the connector (1). Lift the tab of the left back key FPC connector (2). Disconnect the left back key FPC from the connector (3). Make sure the range switch for the left trigger button has been toggled to the bottom (4).

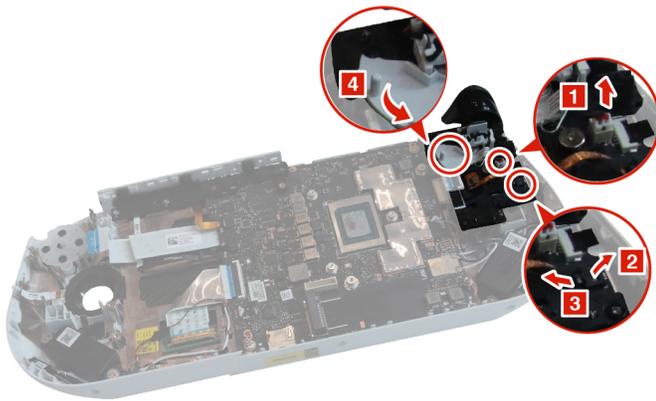


Figure 21. Disconnect the SWT PCB cable and disconnect the back key FPC

Step 2. Remove four screws (5) and loosen one screw with a screw driver (6). Remove the left trigger button frame (7).

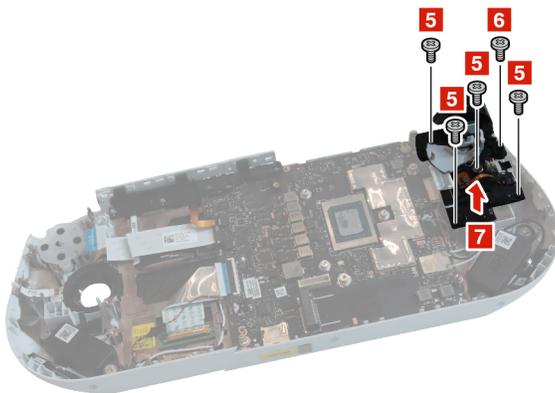


Figure 22. Remove screws and remove the left trigger button frame

Table 13. Screws used to secure the left trigger button frame

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
5	M2	5	1.85 ± 0.15	4

Step 3. Push the back key FPC with a plastic rod from the hole on the back (8). Remove the back key FPC (9).




Figure 23. Remove the back key FPC

Step 4. Release the SWT PCB cable out of the cable groove (10). Remove the SWT PCB (11).



Figure 24. Remove the SWT PCB

Step 5. Remove the left motor (12).

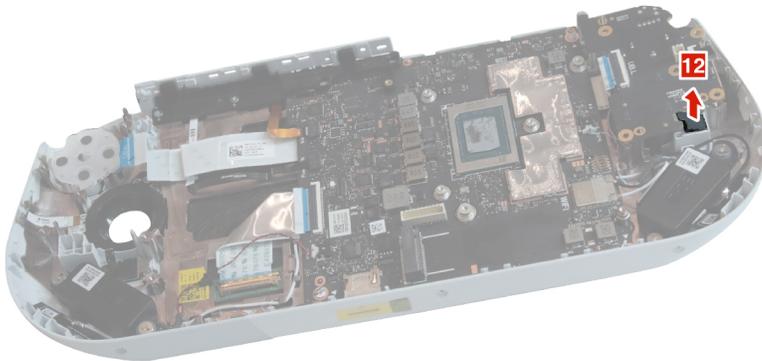


Figure 25. Remove the left motor

Step 6. Lift the tab of the left MB_UB FFC connector (13). Disconnect the left MB_UB FFC from the connector (14).

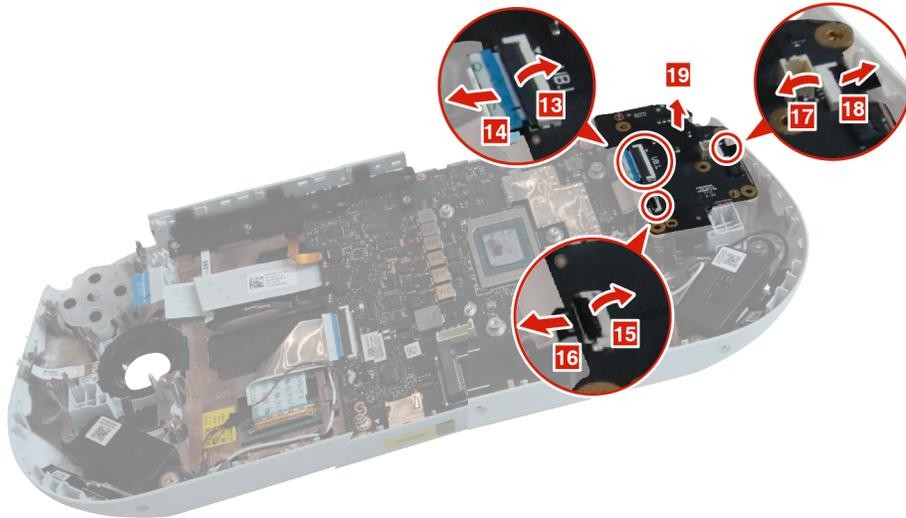


Figure 26. Disconnect the UB_Ring FPC, disconnect the MB_UB FFC, disconnect the D-pad board FFC, and remove the left board

- Step 7. Lift the tab of the D-pad board FFC connector (15). Disconnect the D-pad board FFC from the connector (16).
- Step 8. Lift the tab of the left UB_Ring FPC connector (17). Disconnect the left UB_Ring FPC from the connector (18).
- Step 9. Remove the left board (19).
- Step 10. Remove three screws with a screw driver (20). Remove the D-pad board (21).

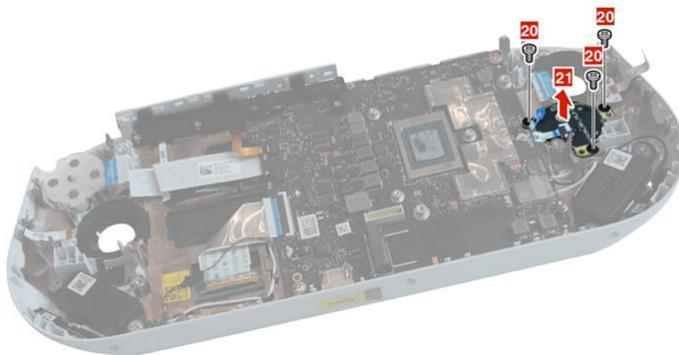


Figure 27. Remove screws and the D-pad board

Table 14. Screws used to secure the D-pad board

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
20	M2	3	1.85 ± 0.15	3

- Step 11. Remove the D-pad rubber (22).

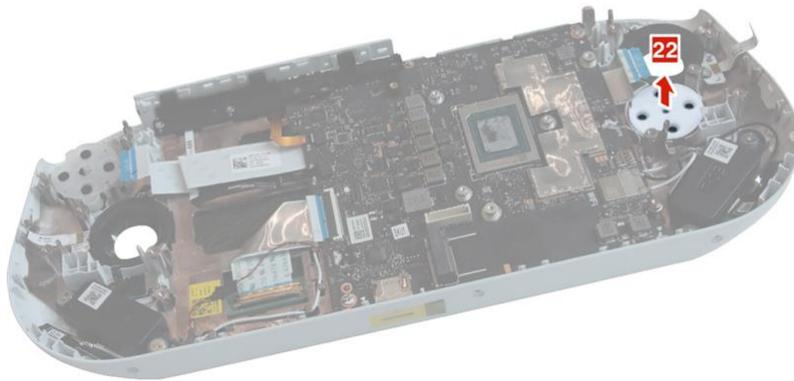


Figure 28. Remove the D-pad rubber

Step 12. Use a pry tool to remove the D-pad frame (23). The D-pad button drops simultaneously.

Attention: Be careful to avoid damaging the spring of the D-pad button.

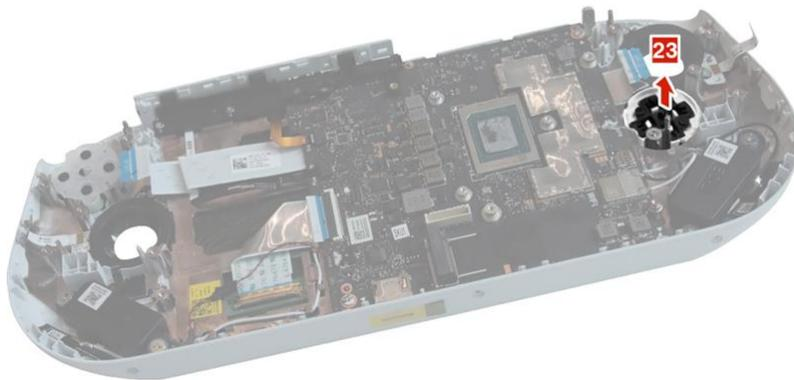


Figure 29. Remove the D-pad frame and D-pad button

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Left controller assembly

Motors

Remove the ABXY rubber and ABXY buttons

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

“Remove the right trigger button frame” on page 35

“Remove the right motor and right board” on page 37

- Approximate time: 1–5 minutes
- Difficulty rating: Easy

Step 1. Remove the ABXY rubber (1).

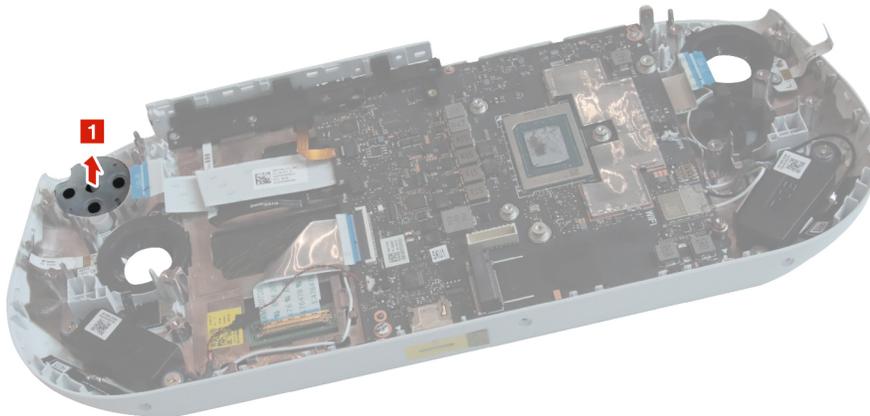


Figure 30. Remove the ABXY rubber

Step 2. Remove the ABXY buttons (2).

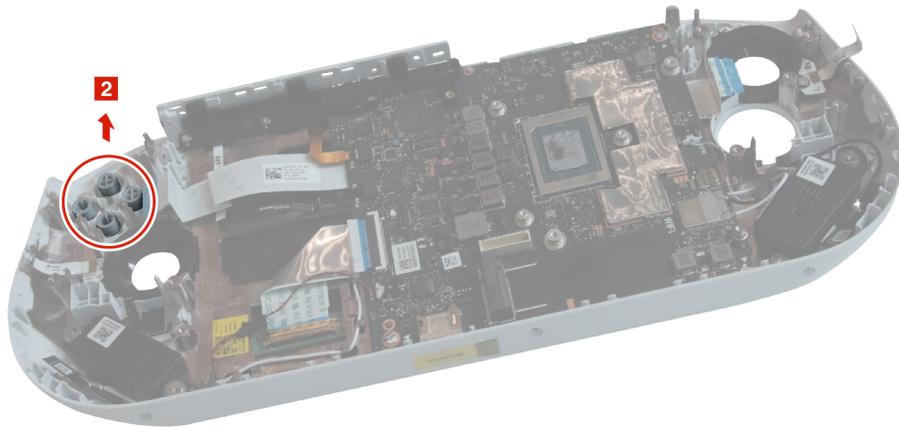


Figure 31. Remove the ABXY buttons

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

- ABXY rubber
- ABXY buttons

Remove the function buttons

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the right trigger button frame” on page 35
- “Remove the right motor and right board” on page 37
- “Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button” on page 38

- Approximate time: 1–5 minutes
- Difficulty rating: Easy

Step 1. Remove the left two function buttons (1).

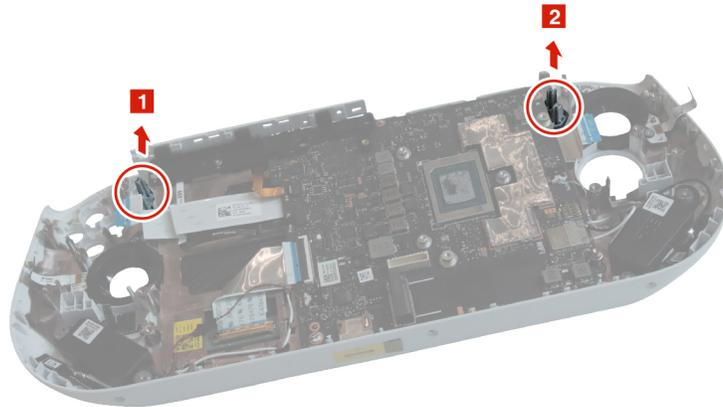


Figure 32. Remove the function buttons

Step 2. Remove the right two function buttons (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Function buttons

Remove the touchpad module

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

“Remove the right trigger button frame” on page 35

“Remove the right motor and right board” on page 37

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Remove one screw with a screw driver (1).

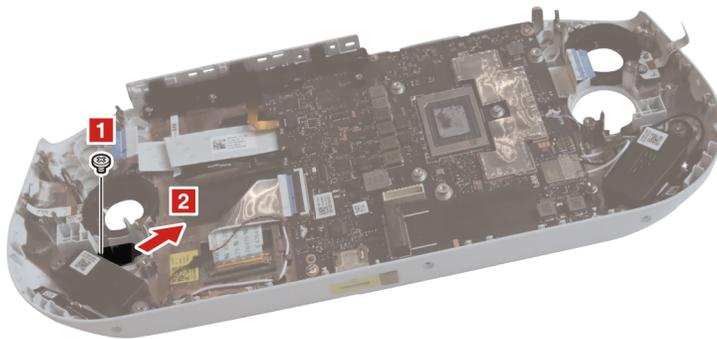


Figure 33. Remove one screw and remove the touchpad module

Table 15. Screw used to secure the touchpad module

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M1.6	1.7	1.2 ± 0.1	1

Step 2. Remove the touchpad module (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Touchpad module

Remove the RGB lights

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the right trigger button frame” on page 35
- “Remove the right motor and right board” on page 37
- “Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button” on page 38

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Remove four screws with a screw driver (1).

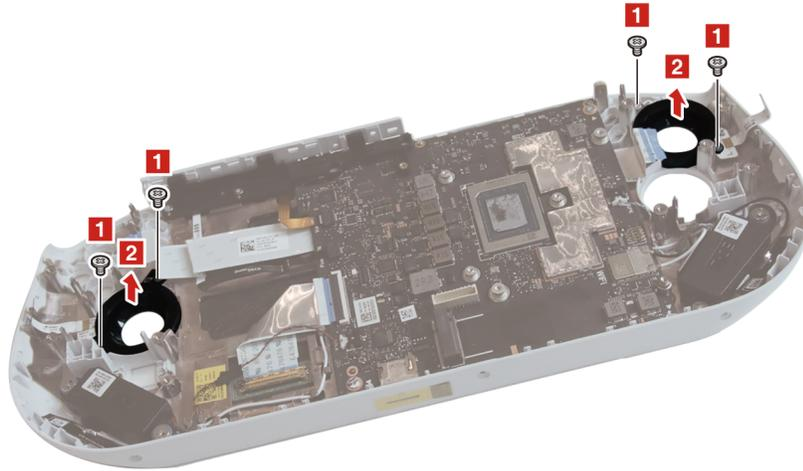


Figure 34. Remove screws and remove RGB lights

Table 16. Screws used to secure RGB lights

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	3	1.85 ± 0.15	4

Step 2. Remove the RGB lights (2).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

- Left RGB light
- Right RGB light

Remove the volume button bezel

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the fan” on page 32

- Approximate time: 10–20 minutes
- Difficulty rating: Easy

Step 1. Remove four screws with a screw driver (1).

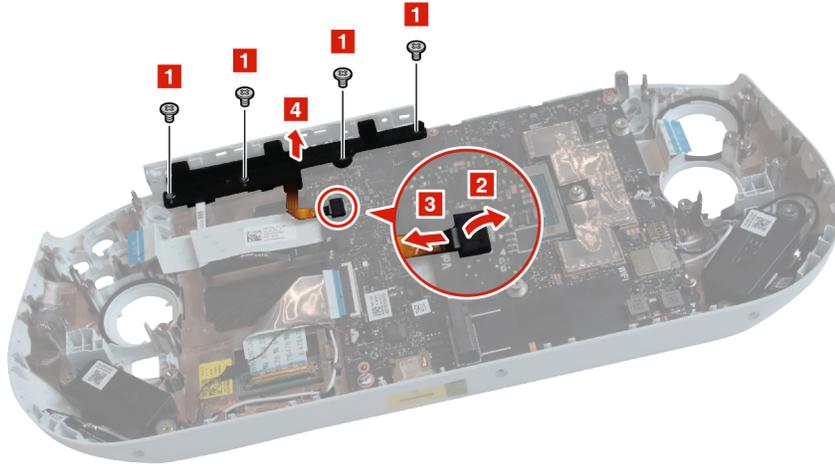


Figure 35. Remove screws, disconnect the ALS FPC, and remove the volume button bezel

Table 17. Screws used to secure the volume button bezel

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	3	1.85 ± 0.15	4

Step 2. Lift the tab of the ALS FPC connector (2). Disconnect the ALS FPC from the connector (3). Remove the volume button bezel (4).

Attention: Be careful to avoid damaging the spring of the volume button.

Step 3. Slowly tear the ALS FPC from the volume button bezel (5).

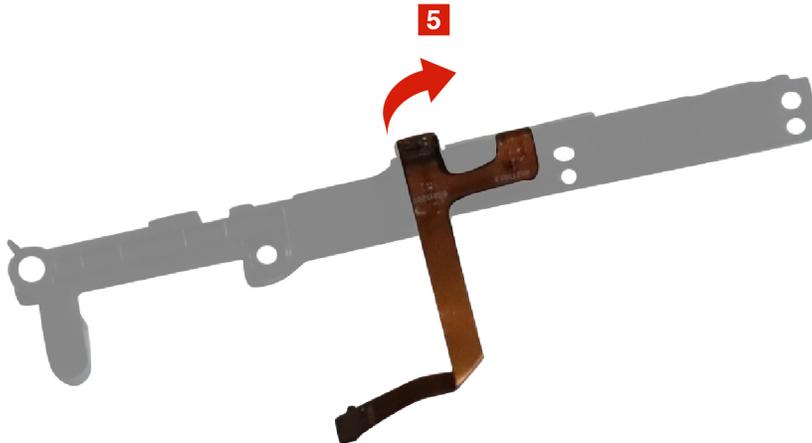


Figure 36. Tear the ALS FPC

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Volume button bezel

Remove the speakers

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the fan” on page 32

- Approximate time: 10–20 minutes
- Difficulty rating: Easy

Step 1. Disconnect the speaker cables from the connectors (1).

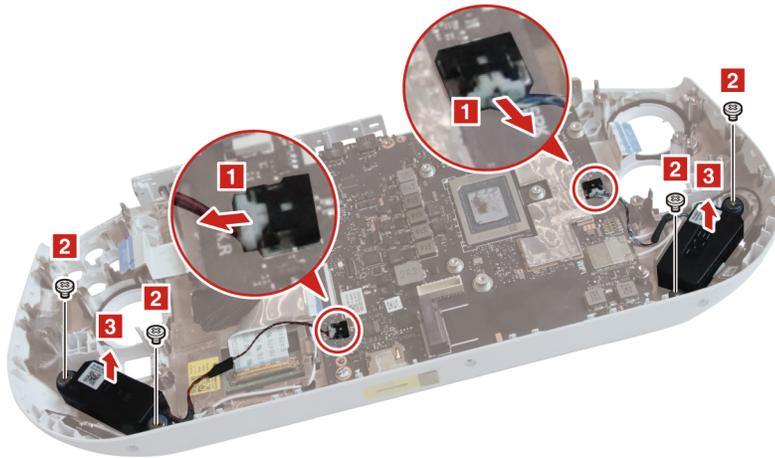


Figure 37. Disconnect speaker cables, remove screws, and remove speakers

Step 2. Remove four screws with a screw driver (2). Remove the speakers (3).

Table 18. Screws used to secure speakers

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
2	M2	2	1.85 ± 0.15	4

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Speakers

Remove the power button

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the fan” on page 32
- “Remove the volume button bezel” on page 47

- Approximate time: 5–10 minutes
- Difficulty rating: Easy

Step 1. Lift the tab of the power button FPC connector (1). Disconnect the power button FPC from the connector (2).

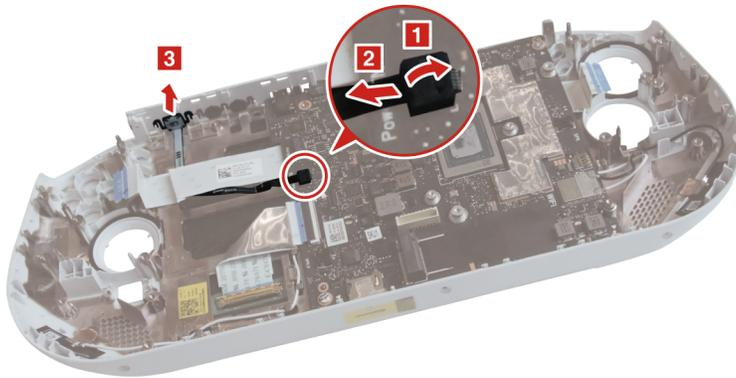


Figure 38. Disconnect the power button FPC and remove the power button

Step 2. Pull the power button frame out and remove the power button (3).

Attention: Be careful to avoid damaging the spring of the power button.

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

Power button

Remove the EDP cable

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31

- Approximate time: 5–10 minutes

- Difficulty rating: Easy

Step 1. Lift the latch fastened on the connector of the EDP cable (1). Disconnect the EDP cable from the connector on the LCD module (2).

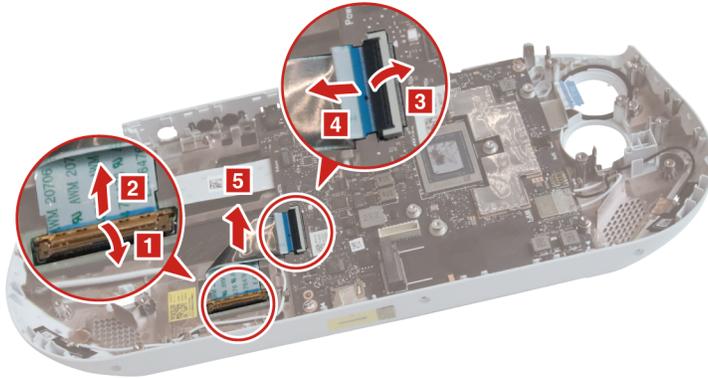


Figure 39. Disconnect the EDP cable and remove the EDP cable

Step 2. Lift the tab of the EDP cable connector (3). Disconnect the EDP cable from the connector on the system board (4). Remove the EDP cable (5).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

EDP cable

Remove the WiFi mylar and antennas

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

“Remove the battery pack” on page 31

“Remove the fan” on page 32

“Remove the SSD bracket, SSD, and SSD pad” on page 34

“Remove the right trigger button frame” on page 35

“Remove the right motor and right board” on page 37

“Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button” on page 38

“Remove the volume button bezel” on page 47

“Remove the speakers” on page 49

“Remove the power button” on page 49

“Remove the EDP cable” on page 50

- Approximate time: 10–20 minutes
- Difficulty rating: Easy

Step 1. Remove three screws with a screw driver (1). Take the system board out (2).

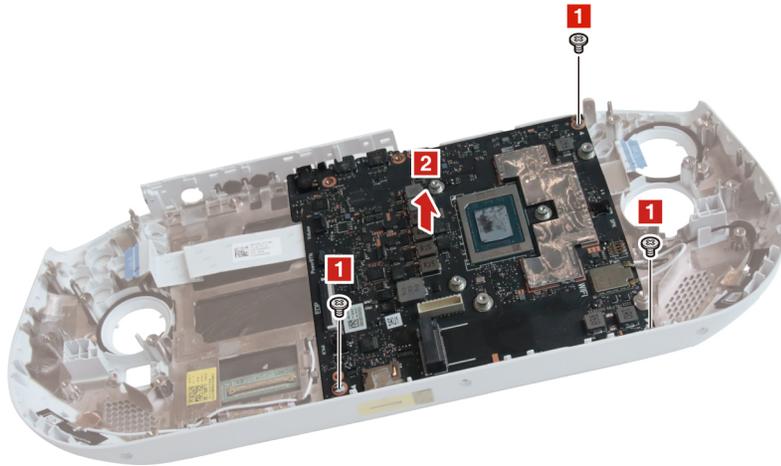


Figure 40. Remove screws and take the system board out

Table 19. Screws used to secure the system board

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	3	1.85 ± 0.15	3

Step 2. Slowly tear the WiFi mylar (3).

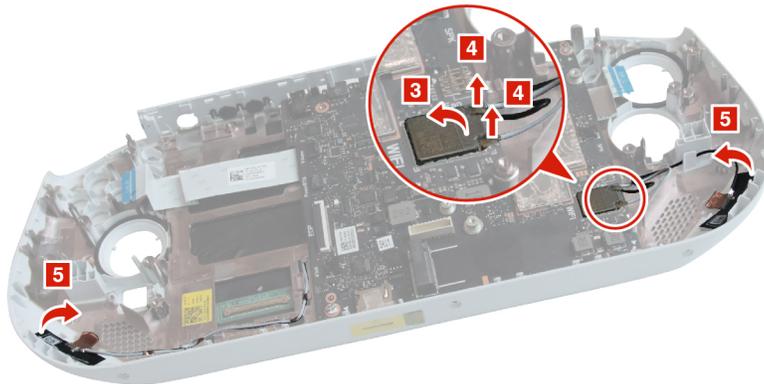


Figure 41. Tear the WiFi mylar, disconnect antenna cables, and tear antennas

Step 3. Disconnect the antenna cables from the connectors (4). Slowly tear the left and right antennas (5).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

WiFi mylar

Antennas

Remove the system board, left UB_MB FFC, and right UB_MB FFC

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

“Remove the deco cover” on page 28

“Remove the bumper buttons” on page 29

“Remove the B cover” on page 29

“Remove the battery pack” on page 31

“Remove the fan” on page 32

“Remove the heat sink” on page 33

“Remove the SSD bracket, SSD, and SSD pad” on page 34

“Remove the right trigger button frame” on page 35

“Remove the right motor and right board” on page 37

“Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button” on page 38

“Remove the volume button bezel” on page 47

“Remove the speakers” on page 49

“Remove the power button” on page 49

“Remove the EDP cable” on page 50

“Remove the WiFi mylar and antennas” on page 51

- Approximate time: 20–40 minutes
- Difficulty rating: Moderate

Step 1. Remove three screws with a screw driver (1). Remove the system board (2).

Note: The mylar on the microSD card slot is reusable.

Attention: Check whether the microphone rubbers are on the system board to avoid dropping them elsewhere.

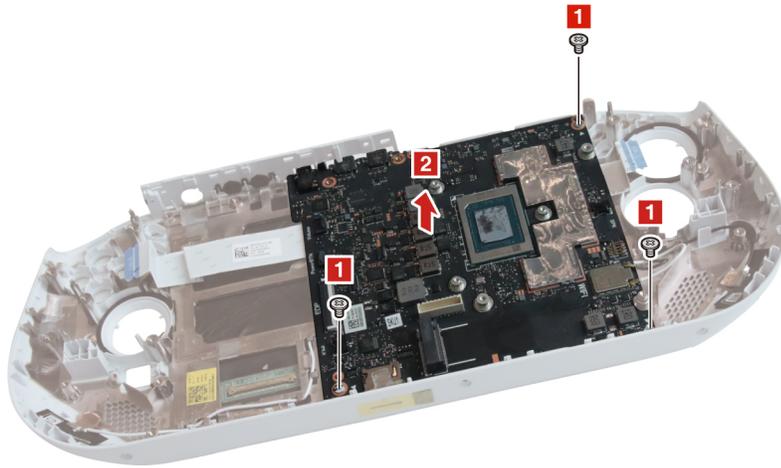


Figure 42. Remove screws and remove the system board

Table 20. Screws used to secure the system board

Label	Thread	Length (mm)	Torque (kgf.cm)	Quantity
1	M2	3	1.85 ± 0.15	3

Step 2. On the removed system board, lift the tab of the left UB_MB FFC connector (3). Disconnect the left UB_MB FFC from the connector (4).

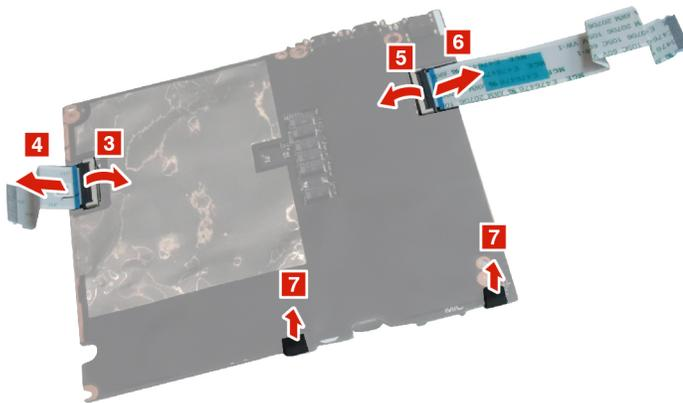


Figure 43. Disconnect the UB_MB FFC and remove the microphone rubbers

Step 3. Lift the tab of the right UB_MB FFC connector (5). Disconnect the right UB_MB FFC from the connector (6).

Step 4. Remove the microphone rubbers (7).

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

- System board
- microSD card slot mylar

Left UB_MB FFC
Right UB_MB FFC

Write key product information to a replacement system board

Some key product information and settings are stored in the ROMs of the PC's system board. The information and settings are essential for using and servicing a Lenovo PC. After replacing a system board for a Lenovo PC, you need to use a Lenovo-provided software tool to write key information—including machine type model (MTM), serial number (SN), and product name—as well as settings such as keyboard language to the replacement system board.

For service technicians, go to <https://support.lenovo.com/us/en/solutions/ht102004> for detailed instructions on how to create and use a Golden Key U1 tool or a normal BIOS tool.

For users, follow the following steps:

Attention: Take extra caution when entering the MTM and SN and when selecting the product name and keyboard language. Carefully verify these details before committing the writing action. Once recorded on the system board, they cannot be altered. Consult Lenovo service if you are uncertain about the MTM, SN, and product name for your PC.

- Step 1. Connect the ac power adapter and turn on the computer.
- Step 2. Download the tool package and double-click the WinMBDWizard.exe file to run the tool. To download the tool, go to <https://support.lenovo.com/solutions/HT516532>.
- Step 3. Follow the on-screen instructions to input the MTM and SN, select the product name and keyboard language of the computer.
- Step 4. Click **Start Update** to update the product information.
- Step 5. Click **Yes** in the confirmation window to continue the update.
- Step 6. Click **Finish** to close the tool.
- Step 7. Click **Yes** in the confirmation window to restart the computer and apply the configuration on the system board.

Note: Do not turn off the computer or disconnect the computer from ac power during the whole process.

Remove the LCD module

Make sure the battery has been disabled. Refer to “Disable the built-in battery” on page 27.

Make sure the following FRUs (or CRUs) have been removed.

- “Remove the deco cover” on page 28
- “Remove the bumper buttons” on page 29
- “Remove the B cover” on page 29
- “Remove the battery pack” on page 31
- “Remove the fan” on page 32
- “Remove the heat sink” on page 33
- “Remove the SSD bracket, SSD, and SSD pad” on page 34
- “Remove the right trigger button frame” on page 35
- “Remove the right motor and right board” on page 37

“Remove the left trigger button frame, left motor, left board, D-pad board, D-pad rubber, D-pad frame, and D-pad button” on page 38

“Remove the ABXY rubber and ABXY buttons” on page 43

“Remove the function buttons” on page 44

“Remove the touchpad module” on page 45

“Remove the RGB lights” on page 46

“Remove the volume button bezel” on page 47

“Remove the speakers” on page 49

“Remove the power button” on page 49

“Remove the EDP cable” on page 50

“Remove the WiFi mylar and antennas” on page 51

“Remove the system board, left UB_MB FFC, and right UB_MB FFC” on page 53

You can get the LCD module after removing the FRUs (or CRUs) above.

Go to <https://support.lenovo.com/partslookup> to look up the Lenovo part number of the following replacement part:

LCD module

Appendix A. Label locations

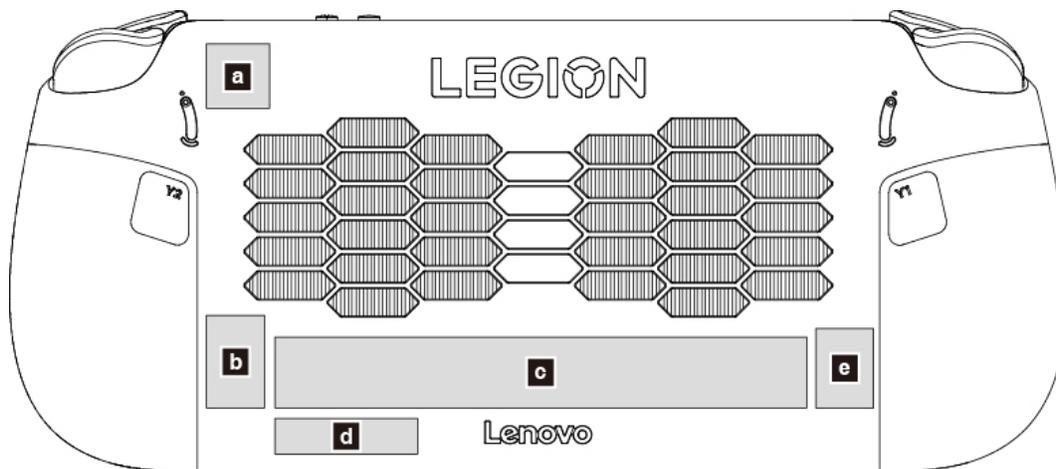


Figure 44. Label layout on the B cover

Labels attached to the B cover are country/region specific. Make sure to apply the appropriate labels to the replacement B cover.

Table 21. B cover labels

Label	Label name	Applied country/region	Label dimensions
a	CO2 offset service label		18 mm x 18 mm
b	eSupport label		17 mm x 26.1 mm
c	Print rating label		150 mm x 20 mm
d	Indonesia SDPPI label	Indonesia	40 mm x 10 mm
e	OS label		<ul style="list-style-type: none"> Windows OS: 16 mm x 22.5 mm Steam OS: 16 mm x 20.25 mm

Note: Depending on the country/region where the computer is purchased, the back cover may include one or more of the above listed labels.

Trademarks

LENOVO and the LENOVO logo are trademarks of Lenovo.

All other trademarks are the property of their respective owners. © 2025 Lenovo.

Lenovo