



# GentleSpace gen2

## BY470P GRN130S/840 PSD-CLO WB GC SI

GentleSpace 2 - LED GreenLine system flux 13,000 lm - 840 neutral white - Power supply unit with DALI interface and constant light output - Wide beam - Clear glass - Silver

With the introduction of the GentleSpace LED luminaire in 2011, Philips achieved a breakthrough in high-bay lighting, offering a huge reduction in power consumption, a long service life and an innovative design. Now, with GentleSpace gen2, Philips continues to improve even further: an improved total cost of ownership, even in extreme conditions with the the GS-2 Xtreme version, which can be used up to +60 °C or 100,000 hrs of lifetime (L80), both ensured by an integrated over-heat protection. In addition, a wide variety of options – e.g. optics, coatings, mounting possibilities, cover materials and suitable for explosive zones 2/22 – are available to ensure an ideal solution for your application. Additionally, the GentleSpace gen2 can be equipped for use in a central emergency grid (PSED).

### Product data

General Information			
Number of light sources	8 pcs	Driver included	Yes
Lamp family code	GRN130S [ LED GreenLine system flux 13,000 lm]	Optic type	Wide beam
Beam angle of light source	114 °	Optical cover/lens type	Clear glass
Light source color	840 neutral white	Luminaire light beam spread	42° x 44°
Cap-Base	- [-]	Embedded control	-
Light source replaceable	Yes	Control interface	DALI
Number of gear units	1 unit	Connection	External connector
Gear	EB [ Electronic]	Cable	Cord with plug Wieland/Adels compatible 5-pole
Driver/power unit/transformer	Power supply unit with DALI interface and constant light output	Protection class IEC	Safety class I
		Mounting	Suspension set twin, triangle
		Coating	-

## GentleSpace gen2

Glow-wire test	Temperature 850 °C, duration 5 s
Flammability mark	For mounting on easily flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Ball impact resistance mark	-
Design Award Winner mark	Design Award Winner 2014
Warranty period	5 years
Suspension accessories	-
Constant light output	Programmable
Number of products on MCB of 16 A type B	12
RoHS mark	RoHS mark
Product family code	BY470P [ GentleSpace 2]

### Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Initial CLO power consumption	70 W
Average CLO power consumption	78 W
Inrush current	4.8 A
Inrush time	2.3 ms
Power Factor (Min)	0.9

### Controls and Dimming

Dimmable	Yes
----------	-----

### Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Glass
Gear tray material	Steel
Fixation material	Stainless steel
Optical cover/lens finish	Clear
Overall length	450 mm
Overall width	350 mm
Overall height	130 mm

### Approval and Application

Ingress protection code	IP65 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [ 2 J reinforced]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	13000 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	149 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	87 W
Power consumption tolerance	+/-11%

### Over Time Performance (IEC Compliant)


Driver failure rate at 5000 h	0.5 %
Median useful life L70B50	70000 h
Median useful life L80B50	50000 h
Median useful life L90B50	25000 h

### Application Conditions


Ambient temperature range	-30 to +45 °C
Average ambient temperature	25 °C
Maximum dim level	10%
Suitable for random switching	No

### Product Data

Full product code	871869632256700
Order product name	BY470P GRN130S/840 PSD-CLO WB GC SI
EAN/UPC - Product	8718696322567
Order code	910930206016
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910930206016
Net Weight (Piece)	9.300 kg





## Dimensional drawing

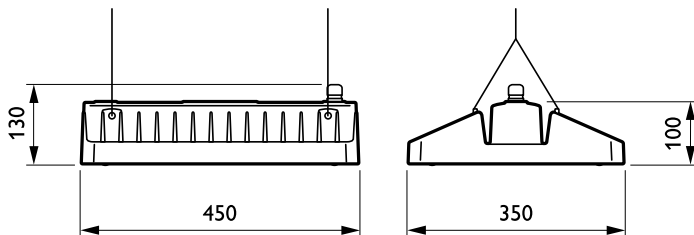

## GentleSpace gen2 BY470P/BY471P

### Photometric data

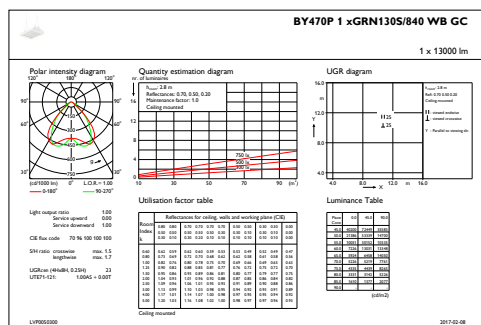

## IFGU1\_BY470P1xGRN130S840WBGC

IFPC1\_BY470P1xGRN130S840WBGC

