

Alienware m15 Ryzen Edition R5

Service Manual

Regulatory Model: P109F
Regulatory Type: P109F002/P109F003
April 2021
Rev. A00

A L I E N W A R E™ 

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Working inside your computer.....	6
Before working inside your computer.....	6
Safety instructions.....	6
Electrostatic discharge—ESD protection.....	7
ESD field service kit	7
Transporting sensitive components.....	8
After working inside your computer.....	8
 Chapter 2: Removing and installing components.....	 9
Recommended tools.....	9
Screw list.....	9
Major components of Alienware m15 Ryzen Edition R5.....	10
Base cover.....	12
Removing the base cover.....	12
Installing the base cover.....	15
Battery.....	17
Lithium-ion battery precautions.....	17
Removing the battery.....	18
Installing the battery.....	19
Solid-state drive.....	20
Removing the 2230 solid-state drive in SSD slot one.....	20
Installing the 2230 solid-state drive in SSD slot one.....	20
Removing the 2280 solid-state drive in SSD slot one.....	21
Installing the 2280 solid-state drive in SSD slot one.....	22
Removing the 2230 solid-state drive in SSD slot two.....	23
Installing the 2230 solid-state drive in SSD slot two.....	24
Removing the 2280 solid-state drive in SSD slot two.....	25
Installing the 2280 solid-state drive in SSD slot two.....	26
Procedure to move the screw mount in SSD slot one.....	27
Procedure to move the screw mount in SSD slot two.....	28
Speakers.....	29
Removing the speakers.....	29
Installing the speakers.....	30
I/O board.....	31
Removing the I/O board.....	31
Installing the I/O board.....	31
Memory module.....	32
Removing the memory module.....	32
Installing the memory module.....	33
Wireless card.....	35
Removing the wireless card.....	35
Installing the wireless card.....	36
Rear-I/O cover.....	37
Removing the rear I/O-cover.....	37
Installing the rear I/O-cover.....	38

Touchpad.....	39
Removing the touchpad.....	39
Installing the touchpad.....	41
Power-adapter port.....	42
Removing the power-adapter port.....	42
Installing the power-adapter port.....	43
Display assembly.....	44
Removing the display assembly.....	44
Installing the display assembly.....	47
Keyboard-controller board.....	50
Removing the keyboard-controller board.....	50
Installing the keyboard-controller board.....	50
System board.....	51
Removing the system board.....	51
Installing the system board.....	55
Heat-sink assembly.....	58
Removing the heat-sink assembly.....	58
Installing the heat-sink assembly.....	59
USB board.....	61
Removing the USB board.....	61
Installing the USB board.....	62
Power button.....	63
Removing the power button.....	63
Installing the power button.....	64
Palm-rest and keyboard assembly.....	65
Removing the palm-rest and keyboard assembly.....	65
Installing the palm-rest and keyboard assembly.....	66
Chapter 3: Drivers and downloads.....	67
Chapter 4: System setup.....	68
BIOS overview.....	68
Entering BIOS setup program.....	68
Navigation keys.....	68
Boot Sequence.....	68
System setup options.....	69
System and setup password.....	72
Assigning a system setup password.....	72
Deleting or changing an existing system setup password.....	73
Clearing CMOS settings.....	73
Clearing BIOS (System Setup) and System passwords.....	74
Chapter 5: Troubleshooting.....	75
System-diagnostic lights.....	75
Flashing BIOS (USB key).....	75
Flashing the BIOS.....	76
Backup media and recovery options.....	76
WiFi power cycle.....	76
Drain residual flea power (perform hard reset).....	77

Chapter 6: Getting help and contacting Alienware.....	78
--	-----------

Working inside your computer

Before working inside your computer

About this task

 **NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Save and close all open files and exit all open applications.

2. Shut down your computer. Click **Start** >  **Power** > **Shut down**.

 **NOTE:** If you are using a different operating system, see the documentation of your operating system for shut-down instructions.

3. Disconnect your computer and all attached devices from their electrical outlets.

4. Disconnect all attached network devices and peripherals, such as keyboard, mouse, and monitor from your computer.

 **CAUTION:** To disconnect a network cable, first unplug the cable from your computer and then unplug the cable from the network device.

5. Remove any media card and optical disc from your computer, if applicable.

Safety instructions

Use the following safety guidelines to protect your computer from potential damage and to ensure your personal safety. Unless otherwise noted, each procedure included in this document assumes that you have read the safety information that shipped with your computer.

 **WARNING:** Before working inside your computer, read the safety information that is shipped with your computer. For more safety best practices, see the Regulatory Compliance home page at www.dell.com/regulatory_compliance.

 **WARNING:** Disconnect your computer from all power sources before opening the computer cover or panels. After you finish working inside the computer, replace all covers, panels, and screws before connecting your computer to an electrical outlet.

 **CAUTION:** To avoid damaging the computer, ensure that the work surface is flat, dry, and clean.

 **CAUTION:** To avoid damaging the components and cards, handle them by their edges, and avoid touching the pins and the contacts.

 **CAUTION:** You should only perform troubleshooting and repairs as authorized or directed by the Dell technical assistance team. Damage due to servicing that is not authorized by Dell is not covered by your warranty. See the safety instructions that is shipped with the product or at www.dell.com/regulatory_compliance.

 **CAUTION:** Before touching anything inside your computer, ground yourself by touching an unpainted metal surface, such as the metal at the back of the computer. While you work, periodically touch an unpainted metal surface to dissipate static electricity which could harm internal components.

 **CAUTION:** When you disconnect a cable, pull it by its connector or its pull tab, not the cable itself. Some cables have connectors with locking tabs or thumbscrews that you must disengage before disconnecting the cable. When disconnecting cables, keep them evenly aligned to avoid bending the connector pins. When connecting cables, ensure that the ports and the connectors are correctly oriented and aligned.

 **CAUTION:** Press and eject any installed card from the media-card reader.

 **NOTE:** The color of your computer and certain components may appear differently than shown in this document.

Electrostatic discharge—ESD protection

ESD is a major concern when you handle electronic components, especially sensitive components such as expansion cards, processors, memory DIMMs, and system boards. Very slight charges can damage circuits in ways that may not be obvious, such as intermittent problems or a shortened product life span. As the industry pushes for lower power requirements and increased density, ESD protection is an increasing concern.

Due to the increased density of semiconductors used in recent Dell products, the sensitivity to static damage is now higher than in previous Dell products. For this reason, some previously approved methods of handling parts are no longer applicable.

Two recognized types of ESD damage are catastrophic and intermittent failures.

- **Catastrophic** – Catastrophic failures represent approximately 20 percent of ESD-related failures. The damage causes an immediate and complete loss of device functionality. An example of catastrophic failure is a memory DIMM that has received a static shock and immediately generates a "No POST/No Video" symptom with a beep code emitted for missing or nonfunctional memory.
- **Intermittent** – Intermittent failures represent approximately 80 percent of ESD-related failures. The high rate of intermittent failures means that most of the time when damage occurs, it is not immediately recognizable. The DIMM receives a static shock, but the tracing is merely weakened and does not immediately produce outward symptoms related to the damage. The weakened trace may take weeks or months to melt, and in the meantime may cause degradation of memory integrity, intermittent memory errors, etc.

The more difficult type of damage to recognize and troubleshoot is the intermittent (also called latent or "walking wounded") failure.

Perform the following steps to prevent ESD damage:

- Use a wired ESD wrist strap that is properly grounded. The use of wireless anti-static straps is no longer allowed; they do not provide adequate protection. Touching the chassis before handling parts does not ensure adequate ESD protection on parts with increased sensitivity to ESD damage.
- Handle all static-sensitive components in a static-safe area. If possible, use anti-static floor pads and workbench pads.
- When unpacking a static-sensitive component from its shipping carton, do not remove the component from the anti-static packing material until you are ready to install the component. Before unwrapping the anti-static packaging, ensure that you discharge static electricity from your body.
- Before transporting a static-sensitive component, place it in an anti-static container or packaging.

ESD field service kit

The unmonitored Field Service kit is the most commonly used service kit. Each Field Service kit includes three main components: anti-static mat, wrist strap, and bonding wire.

Components of an ESD field service kit

The components of an ESD field service kit are:

- **Anti-Static Mat** – The anti-static mat is dissipative and parts can be placed on it during service procedures. When using an anti-static mat, your wrist strap should be snug and the bonding wire should be connected to the mat and to any bare metal on the system being worked on. Once deployed properly, service parts can be removed from the ESD bag and placed directly on the mat. ESD-sensitive items are safe in your hand, on the ESD mat, in the system, or inside a bag.
- **Wrist Strap and Bonding Wire** – The wrist strap and bonding wire can be either directly connected between your wrist and bare metal on the hardware if the ESD mat is not required, or connected to the anti-static mat to protect hardware that is temporarily placed on the mat. The physical connection of the wrist strap and bonding wire between your skin, the ESD mat, and the hardware is known as bonding. Use only Field Service kits with a wrist strap, mat, and bonding wire. Never use wireless wrist straps. Always be aware that the internal wires of a wrist strap are prone to damage from normal wear and tear, and must be checked regularly with a wrist strap tester in order to avoid accidental ESD hardware damage. It is recommended to test the wrist strap and bonding wire at least once per week.
- **ESD Wrist Strap Tester** – The wires inside of an ESD strap are prone to damage over time. When using an unmonitored kit, it is a best practice to regularly test the strap prior to each service call, and at a minimum, test once per week. A wrist strap tester is the best method for doing this test. If you do not have your own wrist strap tester, check with your regional office to find out if they have one. To perform the test, plug the wrist-strap's bonding-wire into the tester while it is strapped to your wrist and push the button to test. A green LED is lit if the test is successful; a red LED is lit and an alarm sounds if the test fails.

- **Insulator Elements** – It is critical to keep ESD sensitive devices, such as plastic heat sink casings, away from internal parts that are insulators and often highly charged.
- **Working Environment** – Before deploying the ESD Field Service kit, assess the situation at the customer location. For example, deploying the kit for a server environment is different than for a desktop or portable environment. Servers are typically installed in a rack within a data center; desktops or portables are typically placed on office desks or cubicles. Always look for a large open flat work area that is free of clutter and large enough to deploy the ESD kit with additional space to accommodate the type of system that is being repaired. The workspace should also be free of insulators that can cause an ESD event. On the work area, insulators such as Styrofoam and other plastics should always be moved at least 12 inches or 30 centimeters away from sensitive parts before physically handling any hardware components
- **ESD Packaging** – All ESD-sensitive devices must be shipped and received in static-safe packaging. Metal, static-shielded bags are preferred. However, you should always return the damaged part using the same ESD bag and packaging that the new part arrived in. The ESD bag should be folded over and taped shut and all the same foam packing material should be used in the original box that the new part arrived in. ESD-sensitive devices should be removed from packaging only at an ESD-protected work surface, and parts should never be placed on top of the ESD bag because only the inside of the bag is shielded. Always place parts in your hand, on the ESD mat, in the system, or inside an anti-static bag.
- **Transporting Sensitive Components** – When transporting ESD sensitive components such as replacement parts or parts to be returned to Dell, it is critical to place these parts in anti-static bags for safe transport.

ESD protection summary

It is recommended that all field service technicians use the traditional wired ESD grounding wrist strap and protective anti-static mat at all times when servicing Dell products. In addition, it is critical that technicians keep sensitive parts separate from all insulator parts while performing service and that they use anti-static bags for transporting sensitive components.

Transporting sensitive components

When transporting ESD sensitive components such as replacement parts or parts to be returned to Dell, it is critical to place these parts in anti-static bags for safe transport.

After working inside your computer

About this task

 **CAUTION:** Leaving stray or loose screws inside your computer may severely damage your computer.

Steps

1. Replace all screws and ensure that no stray screws remain inside your computer.
2. Connect any external devices, peripherals, or cables you removed before working on your computer.
3. Replace any media cards, discs, or any other parts that you removed before working on your computer.
4. Connect your computer and all attached devices to their electrical outlets.
5. Turn on your computer.

Removing and installing components

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Recommended tools

The procedures in this document may require the following tools:

- Phillips screwdriver #0

Screw list

NOTE: When removing screws from a component, it is recommended to note the screw type, the quantity of screws, and then place them in a screw storage box. This is to ensure that the correct number of screws and correct screw type is restored when the component is replaced.

NOTE: Some computers have magnetic surfaces. Ensure that the screws are not left attached to such surfaces when replacing a component.

NOTE: Screw color may vary with the configuration ordered.

Table 1. Screw list


Component	Screw type	Quantity	Screw image
Base cover	M2.5x1.7+3.3L (captive screw)	4	
Base cover	M2.5x8.5+3.5L (captive screw)	2	
Base cover	M2.5x5	2	
Solid-state drive in SSD slot one	M2x4	2	
Solid-state drive in SSD slot two	M2x4	2	
I/O board	M2x4	1	
I/O board	M2x2	1	
Wireless-card bracket	M2x4	1	
Display hinges	M2.5x5	6	
Battery	M2x4	4	

Table 1. Screw list

Component	Screw type	Quantity	Screw image
Battery	M2x3	4	
Touchpad bracket	M2.5x2.5	2	
Touchpad	M2x2	2	
Keyboard-controller board	M2x2	1	
Rear I/O cover	M2x4	2	
Rear I/O cover	M2.5x5	2	
Power-adaptor port-bracket	M2x4	2	
System board	M2x4	9	
Heat-sink assembly	M2x4	6	
USB board	M2x4	2	
Power button	M2x2	3	

Major components of Alienware m15 Ryzen Edition R5

The following image shows the major components of Alienware m15 Ryzen Edition R5.

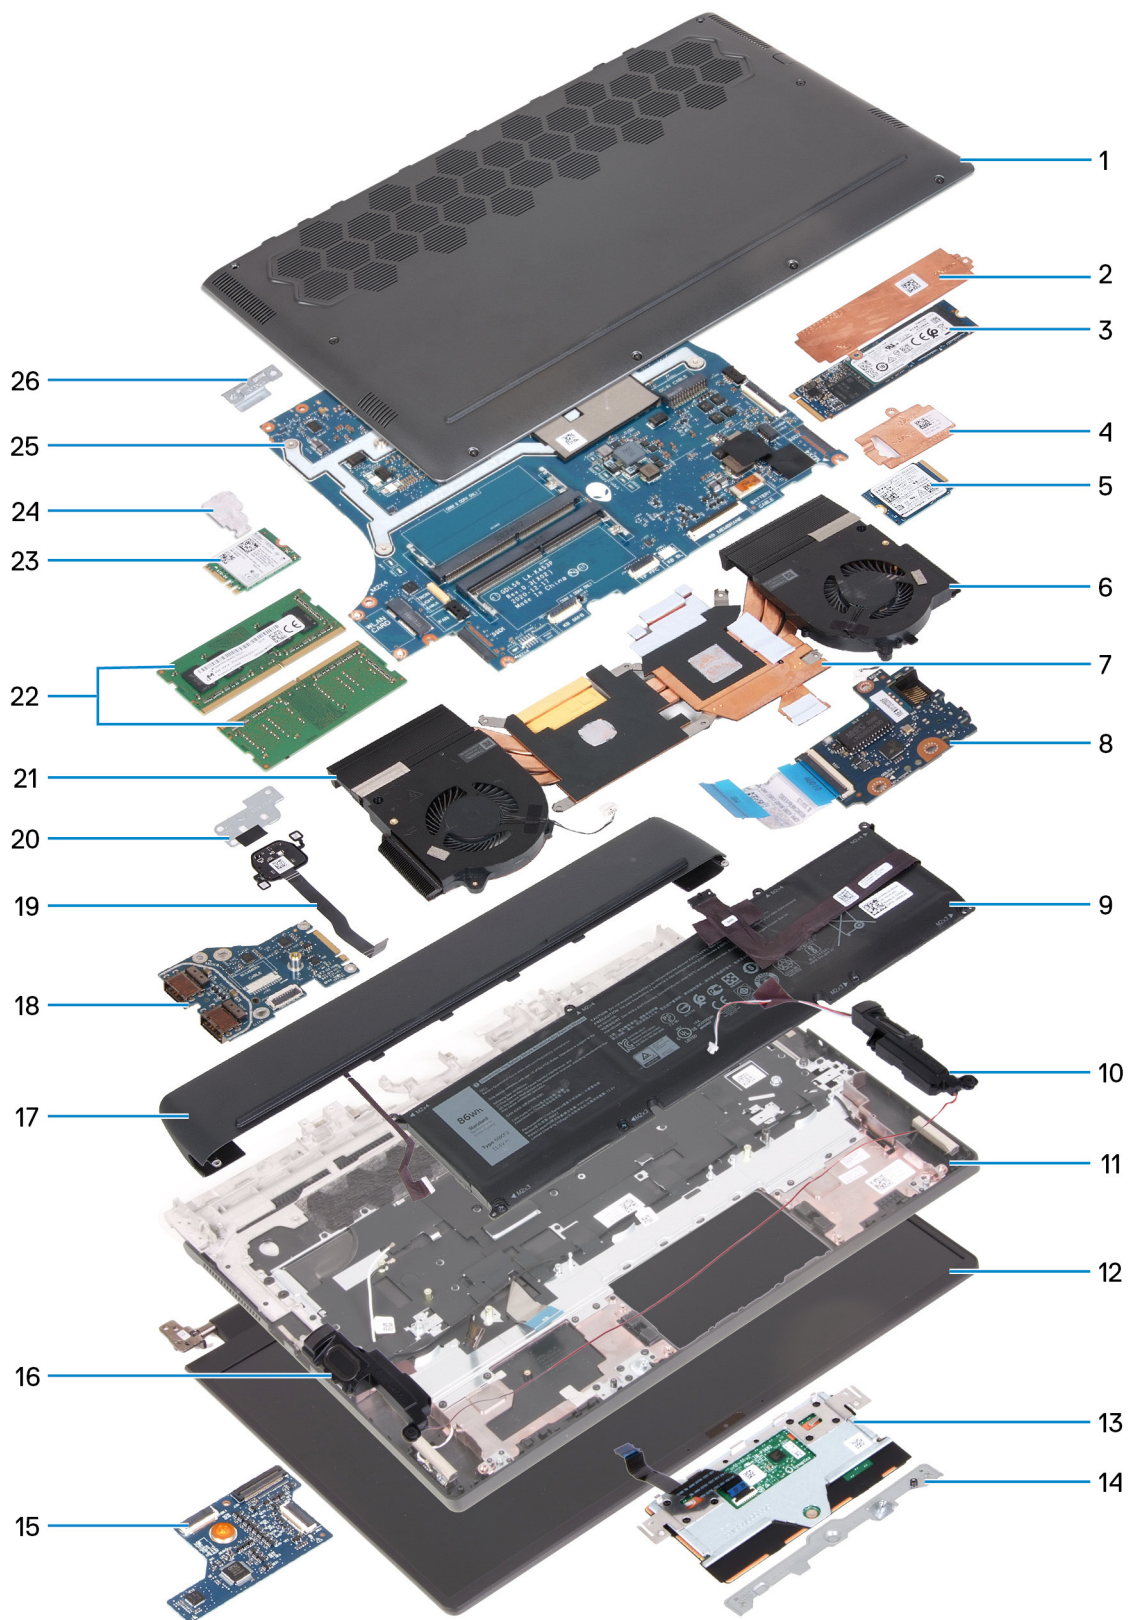

1. Base cover
2. 2280 solid-state drive thermal shield
3. 2280 solid-state drive
4. 2230 solid-state drive thermal shield
5. 2230 solid-state drive
6. Left fan

- 7. Heat sink
- 8. I/O board
- 9. Battery
- 10. Left speaker
- 11. Palm-rest and keyboard assembly
- 12. Display assembly
- 13. Touchpad
- 14. Touchpad bracket
- 15. Keyboard controller board
- 16. Right speaker
- 17. Rear I/O cover
- 18. USB board
- 19. Power button
- 20. Power-button bracket
- 21. Right fan
- 22. Memory modules
- 23. Wireless card
- 24. Wireless card bracket
- 25. System board
- 26. USB Type-C port bracket

i **NOTE:** Dell provides a list of components and their part numbers for the original system configuration purchased. These parts are available according to warranty coverages purchased by the customer. Contact your Dell sales representative for purchase options.

Base cover

Removing the base cover

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).

About this task

The following images indicate the location of the base cover and provide a visual representation of the removal procedure.



2x
M2.5x5






4x
M2.5x1.7+3.3



2x
M2.5x8.5+3.5

1



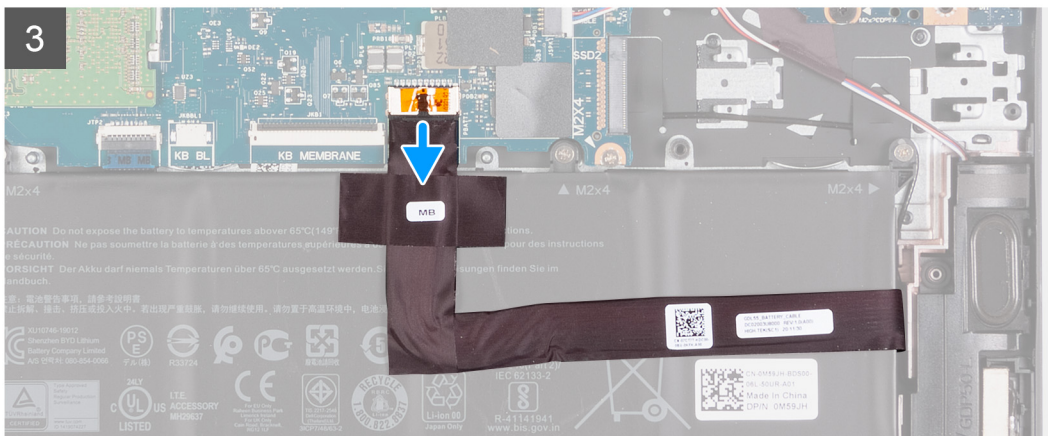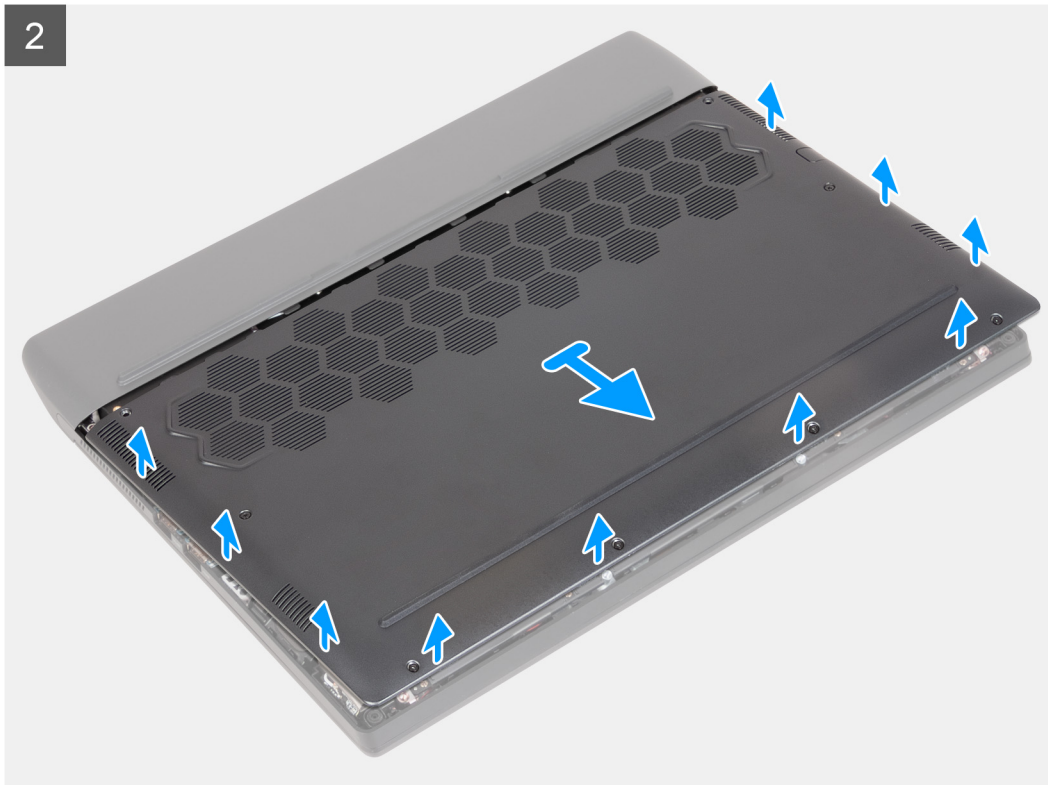

Steps

1. Remove the two screws (M2.5x5) that secure the base cover to the palm-rest and keyboard assembly.
2. Loosen the two captive screws (M2.5x8.5+3.5) that secure the base cover to the palm-rest and keyboard assembly.
3. Loosen the four captive screws (M2.5x1.7+3.3) that secure the base cover to the palm-rest and keyboard assembly.

NOTE: Loosening the four screws creates a gap, which can be used to pry and lift the base cover off the palm-rest and keyboard assembly.
4. Pry open the base cover from the middle of the front edge of base cover.

5. Pry the left and right sides of the base cover.
6. Lift the base cover off the palm-rest and keyboard assembly.

i NOTE: The following steps are applicable only if you want to further remove any other component from your computer.

7. Disconnect the battery cable from the system board.
8. Turn your computer over and press the power button for 20 seconds to drain the flea power.



Installing the base cover

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following images indicate the location of the base cover and provide a visual representation of the installation procedure.

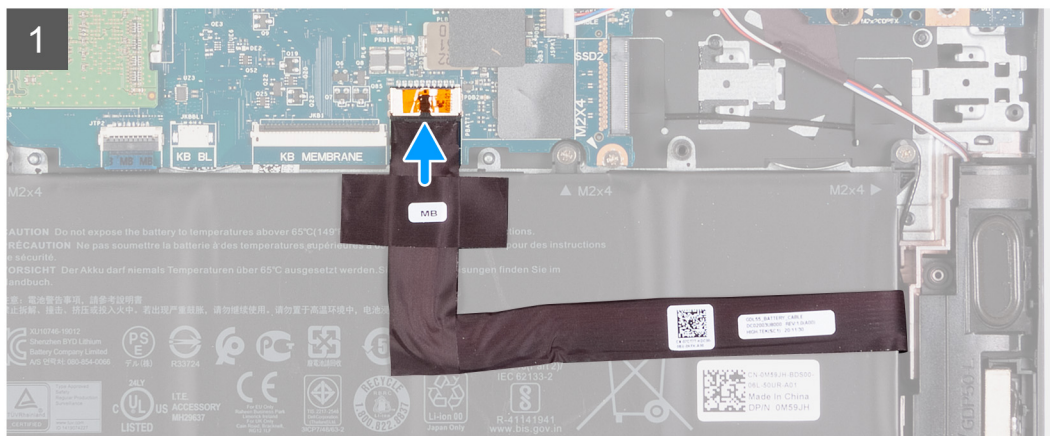

2

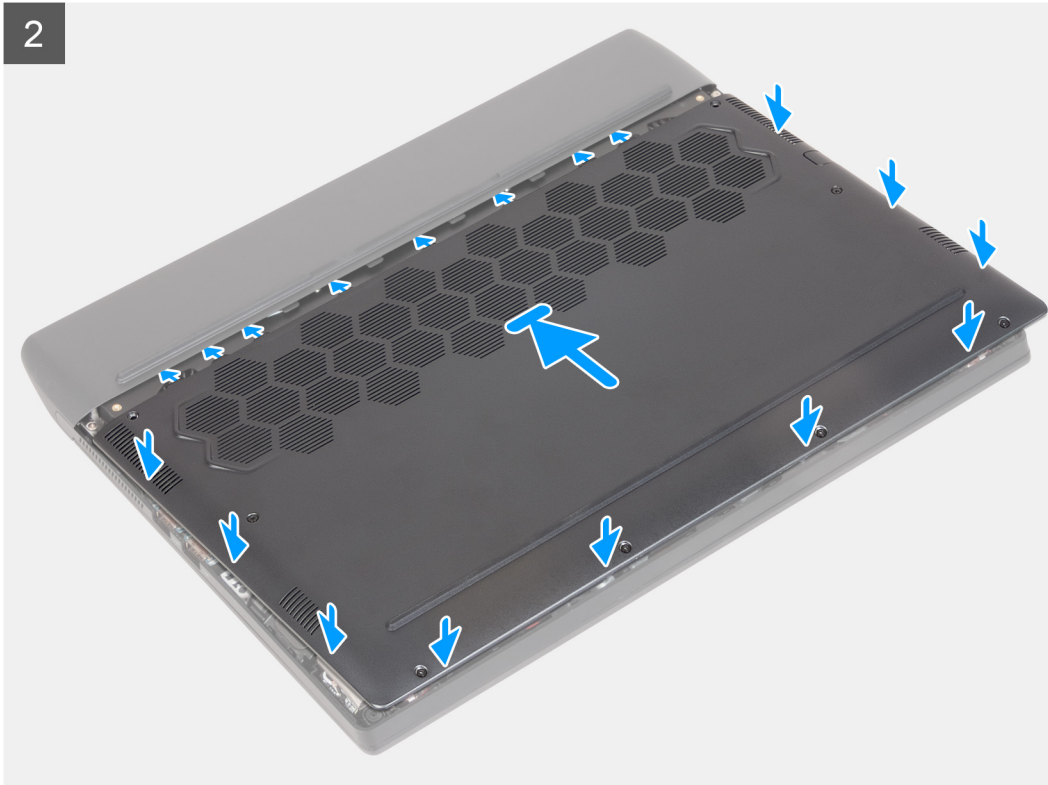



2x
M2.5x5



4x
M2.5x1.7+3.3



2x
M2.5x8.5+3.5

3



Steps

1. Connect the battery cable to the system board.
2. Slide the notches on the top of the base cover under the rear I/O-cover, and snap the base cover into place on the palm-rest assembly.
3. Replace the two screws (M2.5x5) that secure the base cover to the palm-rest and keyboard assembly.
4. Tighten the two captive screws (M2.5x8.5+3.5) that secure the base cover to the palm-rest and keyboard assembly.
5. Tighten the four captive screws (M2.5x1.7+3.3) that secure the base cover to the palm-rest and keyboard assembly.

Next steps

1. Follow the procedure in [After working inside your computer.](#)

Battery

Lithium-ion battery precautions



CAUTION:

- Exercise caution when handling Lithium-ion batteries.

- Discharge the battery completely before removing it. Disconnect the AC power adapter from the system and operate the computer solely on battery power—the battery is fully discharged when the computer no longer turns on when the power button is pressed.
- Do not crush, drop, mutilate, or penetrate the battery with foreign objects.
- Do not expose the battery to high temperatures, or disassemble battery packs and cells.
- Do not apply pressure to the surface of the battery.
- Do not bend the battery.
- Do not use tools of any kind to pry on or against the battery.
- Ensure any screws during the servicing of this product are not lost or misplaced, to prevent accidental puncture or damage to the battery and other system components.
- If the battery gets stuck inside your computer as a result of swelling, do not try to release it as puncturing, bending, or crushing a lithium-ion battery can be dangerous. In such an instance, contact Dell technical support for assistance. See www.dell.com/contactdell.
- Always purchase genuine batteries from www.dell.com or authorized Dell partners and resellers.


Removing the battery

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

About this task

The following image indicates the location of the battery and provides a visual representation of the removal procedure.

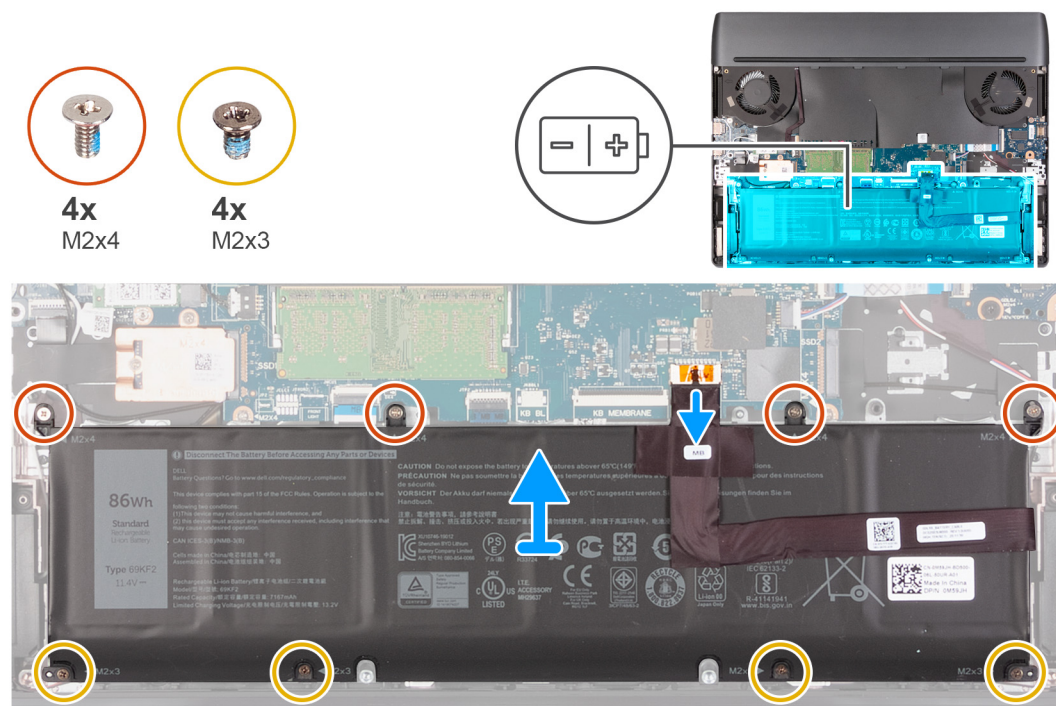

Steps

1. Disconnect the battery cable from the system board (applicable only if not disconnected earlier).
 - ① **NOTE:** After removing the battery, store the battery cable safely. The replacement battery will not be shipped with the battery cable. If you want to replace the battery cable, it has to be purchased separately.
2. Remove the four screws (M2x4) that secure the battery to the palm-rest and keyboard assembly.

3. Remove the four screws (M2x3) that secure the battery to the palm-rest and keyboard assembly.
4. Lift the battery off the palm-rest and keyboard assembly.


Installing the battery

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the battery and provides a visual representation of the installation procedure.

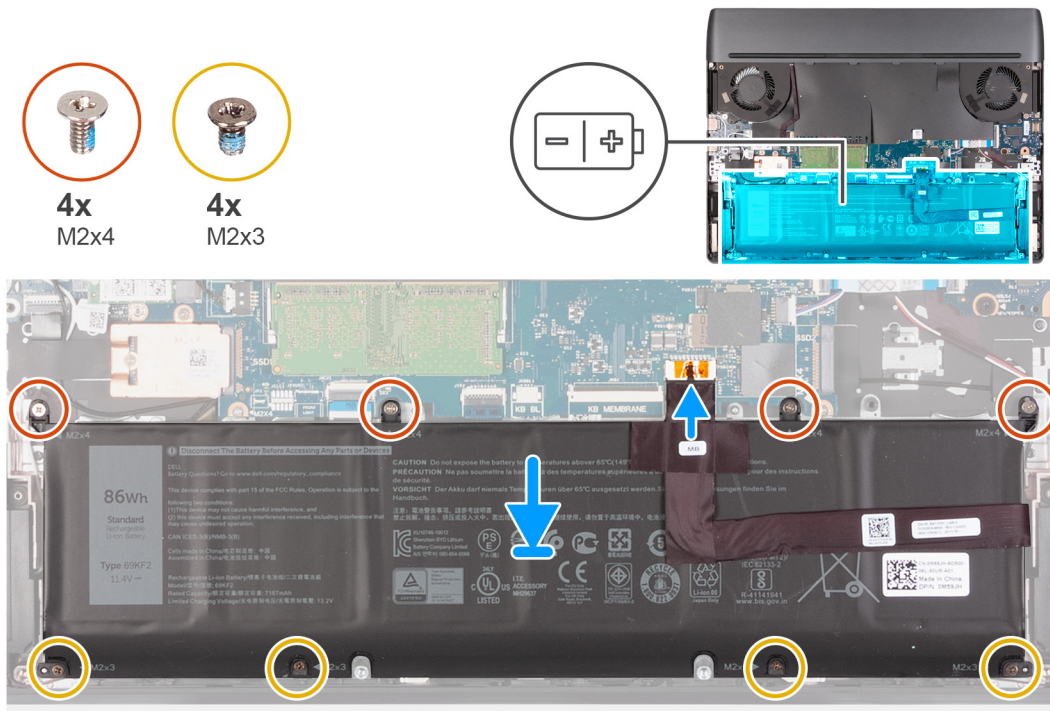

Steps

1. Using the alignment posts, place the battery on the palm-rest and keyboard assembly.
2. Align the screw holes on the battery with the screw holes on the palm-rest and keyboard assembly.
3. Replace the four screws (M2x4) that secure the battery to the palm-rest and keyboard assembly.
4. Replace the four screws (M2x3) that secure the battery to the palm-rest and keyboard assembly.
5. Connect the battery cable to the system board.

NOTE: If you are replacing your old battery with the new battery, use the battery cable that came with the old battery. If you want to replace the battery cable, it has to be purchased separately.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Solid-state drive

Removing the 2230 solid-state drive in SSD slot one

Prerequisites

1. Follow the procedure in [Before working inside your computer.](#)

⚠ **CAUTION:** Solid-state drives are fragile. Exercise care when handling the solid-state drive.


⚠ **CAUTION:** To avoid data loss, do not remove the solid-state drive while the computer is in sleep or on state.

2. Remove the [base cover.](#)

About this task

ⓘ **NOTE:** This procedure applies only to computers shipped with a 2230 solid-state drive installed in SSD slot one.

The following image indicates the location of the 2230 solid-state drive that is installed in SSD slot one and provides a visual representation of the removal procedure.

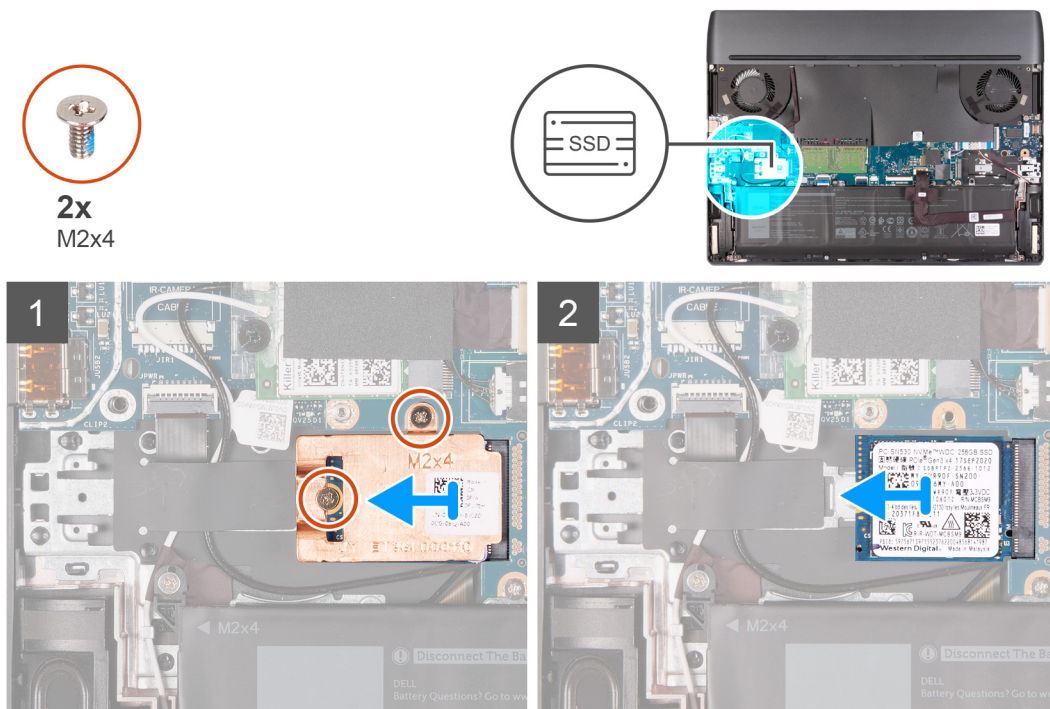

Steps

1. Remove the two screws (M2x4) that secure the thermal shield to the solid-state drive and the system board.
2. Lift the thermal shield off the solid-state drive.
3. Slide and lift the solid-state drive off the solid-state drive slot on the system board.

Installing the 2230 solid-state drive in SSD slot one

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

- NOTE:** This procedure applies only to computers shipped with a 2230 solid-state drive installed in SSD slot one.
- NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot one.

If you want to replace your 2230 solid-state drive with a 2280 solid-state drive, see [procedure to move the screw mount](#).

The following image indicates the location of the 2230 solid-state drive that is installed in SSD slot one and provides a visual representation of the installation procedure.

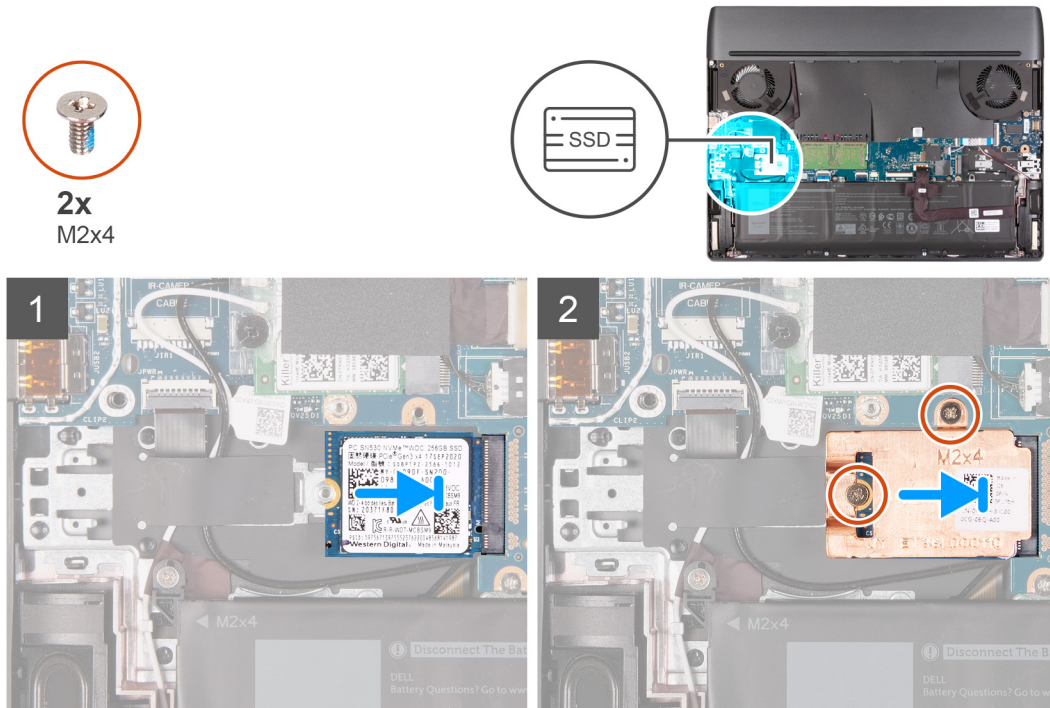

Steps

1. Align the notch on the solid-state drive with the tab on the solid-state drive slot.
2. Slide the solid-state drive into the solid-state drive slot.
3. Place the thermal shield on the solid-state drive.
4. Align the screw holes on the thermal shield with the screw holes on the solid-state drive and system board.
5. Replace the two screws (M2x4) that secure the thermal shield to the solid-state drive and the system board.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Removing the 2280 solid-state drive in SSD slot one


Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. **CAUTION:** Solid-state drives are fragile. Exercise care when handling the solid-state drive.
3. **CAUTION:** To avoid data loss, do not remove the solid-state drive while the computer is in sleep or on state.
3. Remove the [base cover](#).

About this task

i **NOTE:** This procedure applies only to computers shipped with a 2280 solid-state drive installed in SSD slot one.

The following image indicates the location of the 2280 solid-state drive that is installed in SSD slot one and provides a visual representation of the removal procedure.

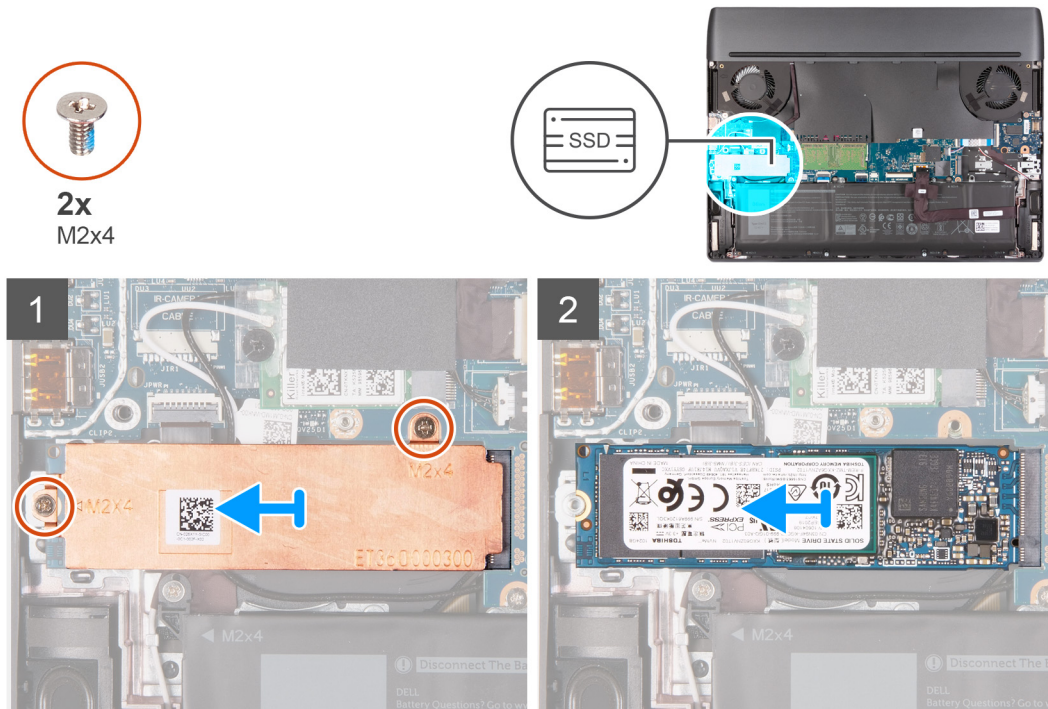

Steps

1. Remove the two screws (M2x4) that secure the thermal shield to the solid-state drive and the system board.
2. Lift the thermal shield off the solid-state drive.
3. Slide and lift the solid-state drive off the solid-state drive slot on the system board.

Installing the 2280 solid-state drive in SSD slot one

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.


About this task

i **NOTE:** This procedure applies only to computers shipped with a 2280 solid-state drive installed in SSD slot one.

i **NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot one.

If you want to replace your 2230 solid-state drive with a 2280 solid-state drive, see [procedure to move the screw mount](#).

The following image indicates the location of the 2280 solid-state drive that is installed in SSD slot one and provides a visual representation of the installation procedure.

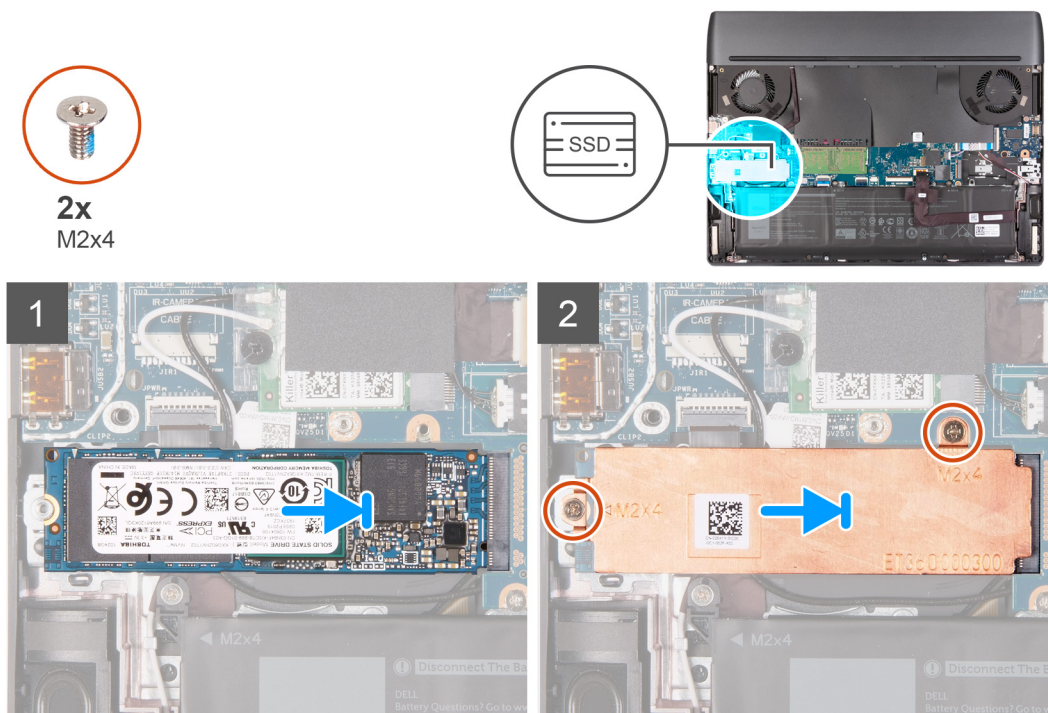

Steps

1. Align the notch on the solid-state drive with the tab on the solid-state drive slot.
2. Slide the solid-state drive into the solid-state drive slot.
3. Place the thermal shield on the solid-state drive.
4. Align the screw holes on the thermal shield with the screw holes on the solid-state drive and system board.
5. Replace the two screws (M2x4) that secure the thermal shield to the solid-state drive and the system board.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Removing the 2230 solid-state drive in SSD slot two


Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2.  **CAUTION:** Solid-state drives are fragile. Exercise care when handling the solid-state drive.
-  **CAUTION:** To avoid data loss, do not remove the solid-state drive while the computer is in sleep or on state.
3. Remove the [base cover](#).

About this task

-  **NOTE:** This procedure applies only to computers shipped with a 2230 solid-state drive installed in SSD slot two.
-  **NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot two.

The following image indicates the location of the 2230 solid-state drive that is installed in SSD slot two and provides a visual representation of the removal procedure.

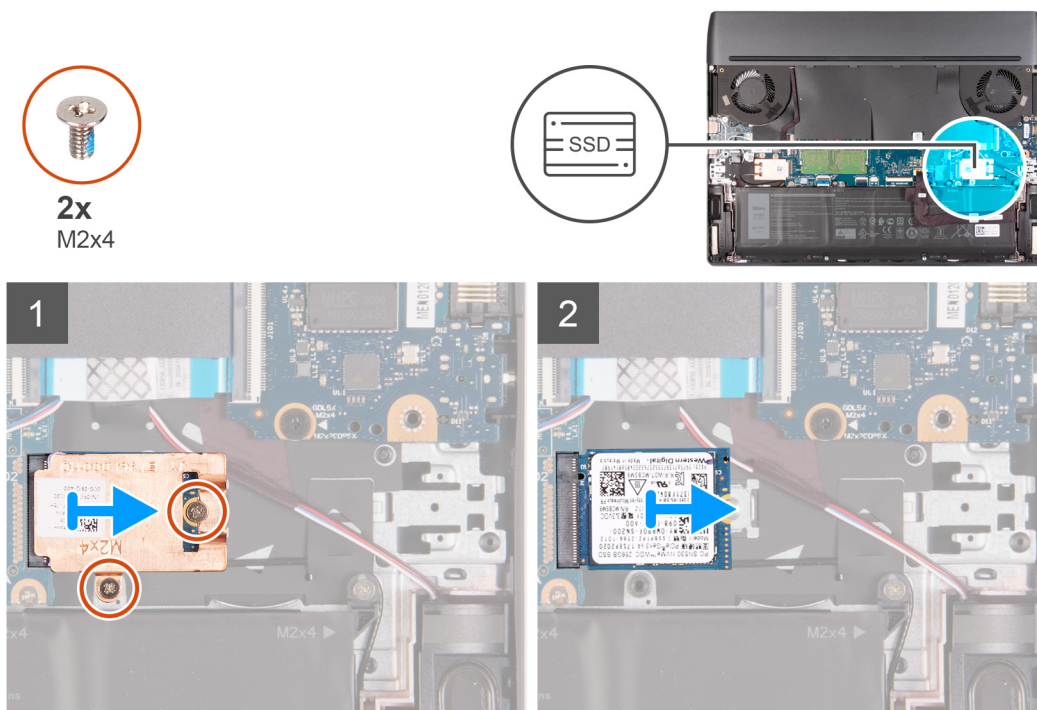

Steps

1. Remove the two screws (M2x4) that secure the thermal shield to the system board and the palm-rest and keyboard assembly.
2. Lift the thermal shield off the solid-state drive.
3. Slide and lift the solid-state drive off the solid-state drive slot on the system board.

Installing the 2230 solid-state drive in SSD slot two

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

- NOTE:** This procedure applies only to computers shipped with a 2230 solid-state drive installed in SSD slot two.
- NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot two.

If you want to replace your 2280 solid-state drive with a 2230 solid-state drive , see [procedure to change the screw mount](#).

The following image indicates the location of the 2230 solid-state drive installed in SSD slot two and provides a visual representation of the installation procedure.

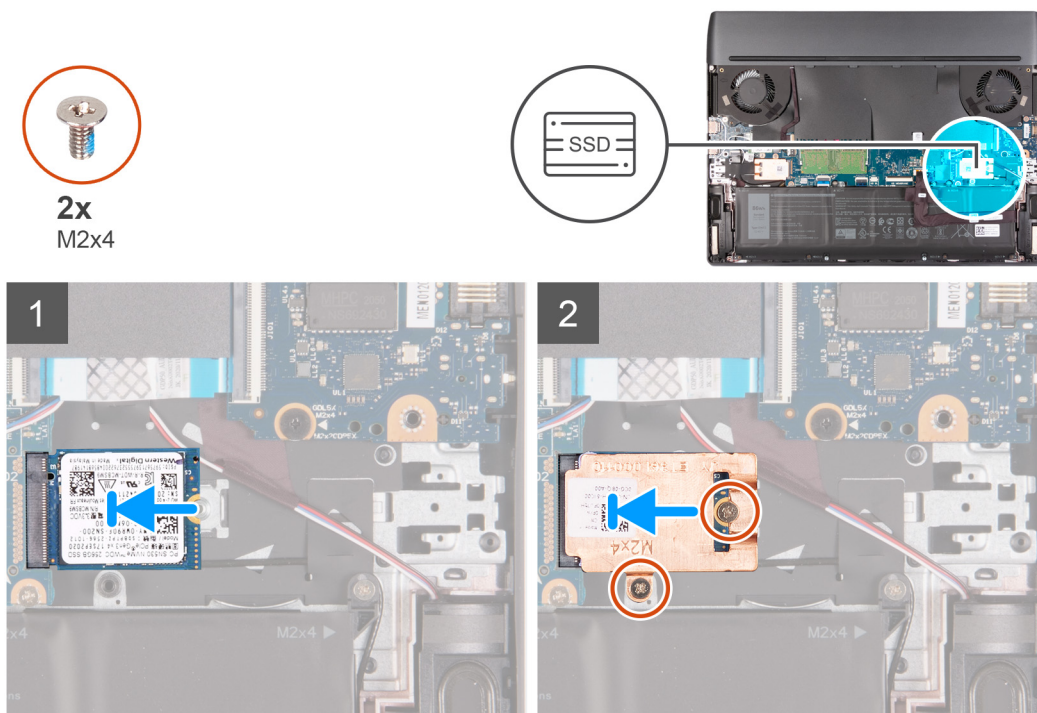

Steps

1. Align the notch on the solid-state drive with the tab on the solid-state drive slot.
2. Slide the solid-state drive into the solid-state drive slot.
3. Place the solid-state drive bracket on the solid-state drive.
4. Align the screw holes on the thermal shield with the screw holes on the solid-state drive and system board.
5. Replace the two screws (M2x4) that secure the solid-state drive to the system board.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Removing the 2280 solid-state drive in SSD slot two


Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2.  **CAUTION:** Solid-state drives are fragile. Exercise care when handling the solid-state drive.
-  **CAUTION:** To avoid data loss, do not remove the solid-state drive while the computer is in sleep or on state.
3. Remove the [base cover](#).

About this task

-  **NOTE:** This procedure applies only to computers shipped with a 2280 solid-state drive installed in SSD slot two.
-  **NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot two.

The following image indicates the location of the 2280 solid-state drive that is installed in SSD slot two and provides a visual representation of the removal procedure.

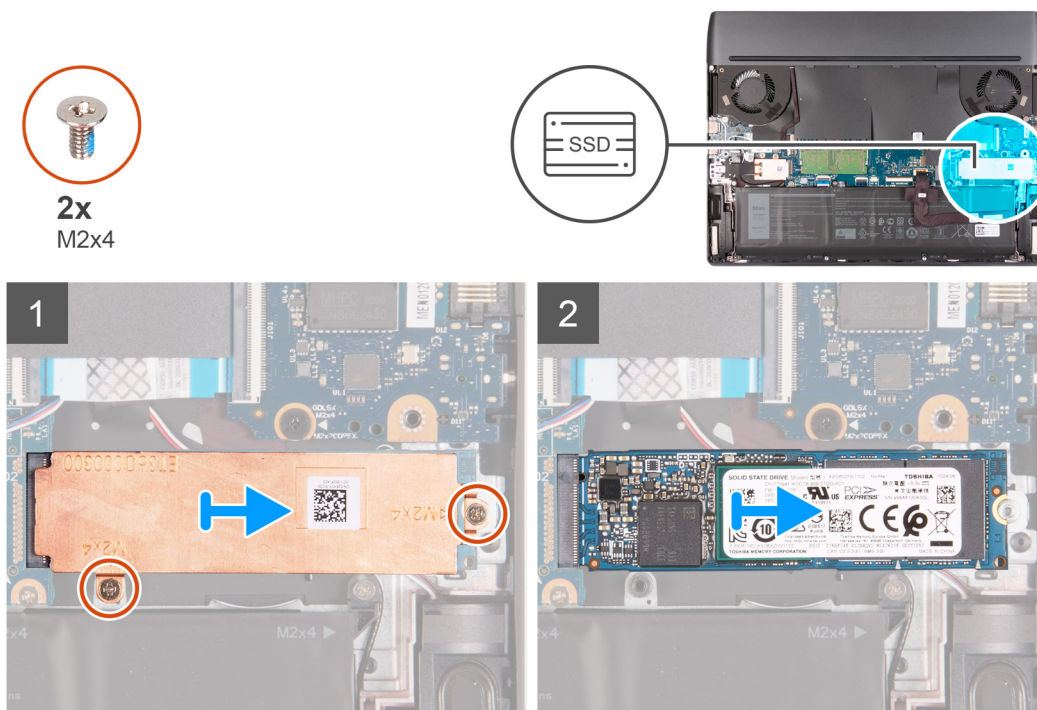

Steps

1. Remove the two screws (M2x4) that secure the thermal shield to the system board and the palm-rest and keyboard assembly.
2. Lift the thermal shield off the solid-state drive.
3. Slide and lift the solid-state drive off the solid-state drive slot on the system board.

Installing the 2280 solid-state drive in SSD slot two

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

- NOTE:** This procedure applies only to computers shipped with a 2280 solid-state drive installed in SSD slot two.
- NOTE:** Depending on the configuration ordered, your computer may support either 2230 solid-state drive or 2280 solid-state drive in SSD slot two.

If you want to replace your 2280 solid-state drive with a 2230 solid-state drive, see [procedure to change the screw mount](#).

The following image indicates the location of the 2280 solid-state drive installed in SSD slot two and provides a visual representation of the installation procedure.

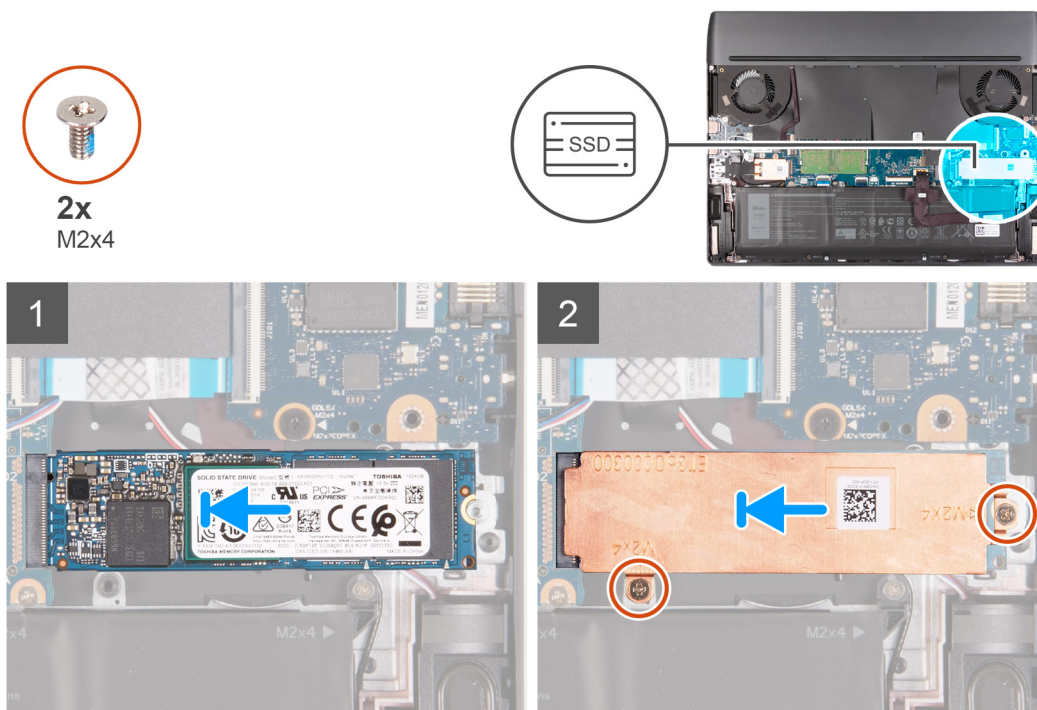

Steps

1. Align the notch on the solid-state drive with the tab on the solid-state drive slot.
2. Slide the solid-state drive into the solid-state drive slot.
3. Place the solid-state drive bracket on the solid-state drive.
4. Align the screw holes on the thermal shield with the screw holes on the solid-state drive and system board.
5. Replace the two screws (M2x4) that secure the solid-state drive to the system board.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Procedure to move the screw mount in SSD slot one

About this task





This computer supports two solid-state drive form factors in SSD slot one:

- M.2 2230
- M.2 2280

If you are replacing the current solid-state drive in SSD slot one, with another solid-state drive that is of a different form factor, see the following procedure to move the location of the screw mount in SSD slot one.

Steps

1. Slide to remove the screw mount from the palm-rest and keyboard assembly.
2. Slide the screw mount into the other screw mount slot on the palm-rest and keyboard assembly.

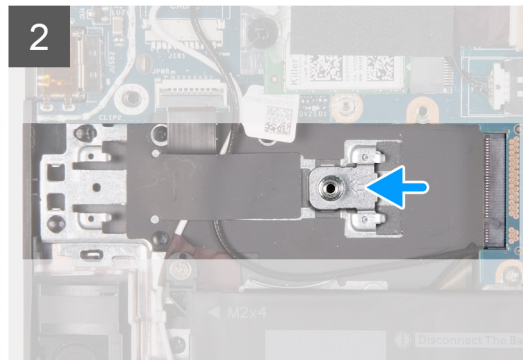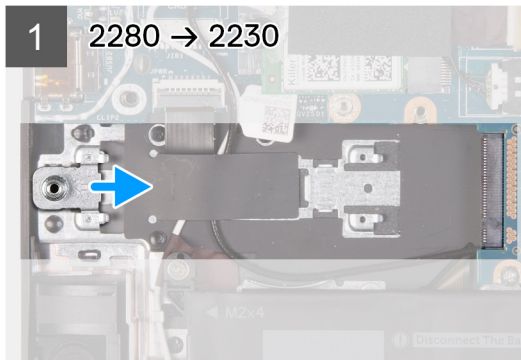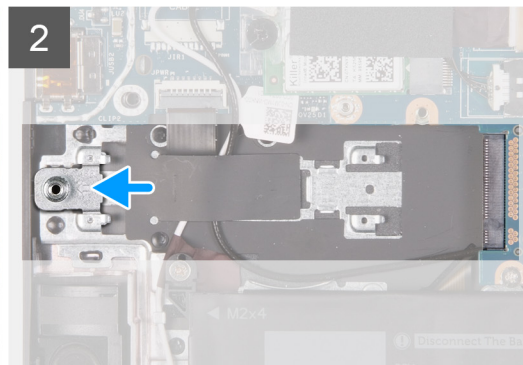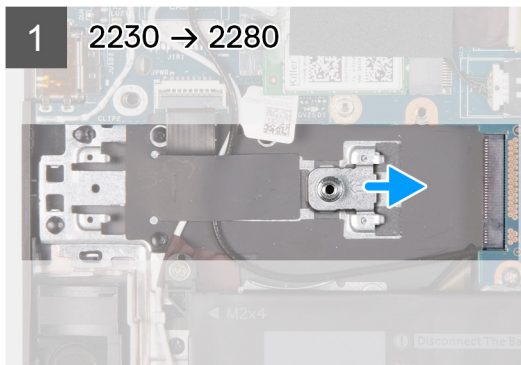

3. To install a 2230 solid-state drive in SSD slot one, see [installing the 2230 solid-state drive in SSD slot one](#).
4. To install a 2280 solid-state drive in SSD slot one, see [installing the 2280 solid-state drive in SSD slot one](#).

Procedure to move the screw mount in SSD slot two

About this task



This computer supports two solid-state drive form factors in SSD slot two:


- M.2 2230
- M.2 2280

If you are replacing the current solid-state drive in SSD slot two, with another solid-state drive that is of a different form factor, see the following procedure to move the location of the screw mount in SSD slot two.

Steps

1. Slide to remove the screw mount from the palm-rest and keyboard assembly.
2. Slide the screw mount into the other screw mount slot on the palm-rest and keyboard assembly.

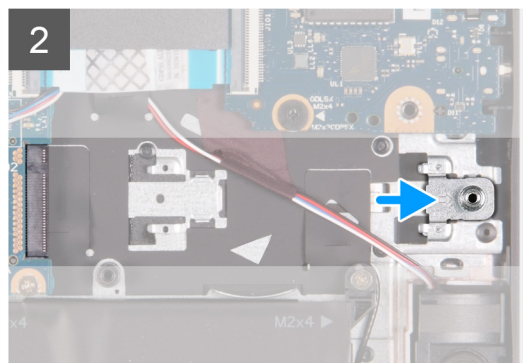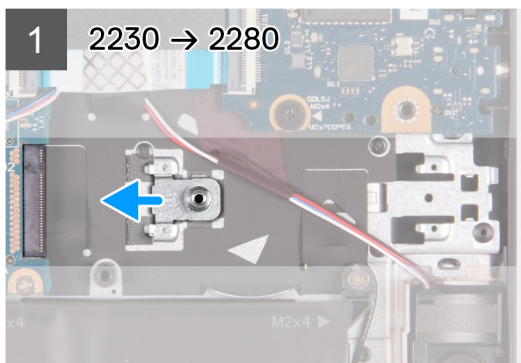

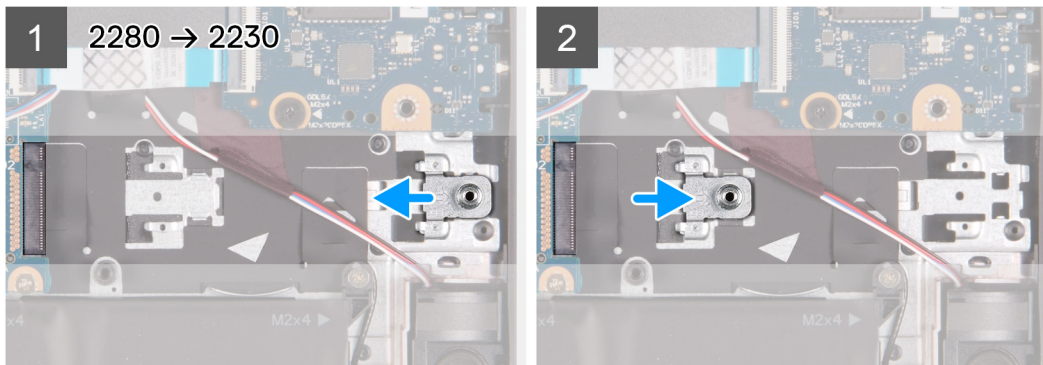

3. To install a 2230 solid-state drive in SSD slot two, see [installing the 2230 solid-state drive in SSD slot two](#).
4. To install a 2280 solid-state drive in SSD slot two, see [installing the 2280 solid-state drive in SSD slot two](#).

Speakers


Removing the speakers

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
 2. Remove the [base cover](#).
 3. Remove the [battery](#).
 4. Remove the [2280 solid-state drive in SSD slot 2](#).
- NOTE:** This step is required if the device is shipped with a 2280 solid-state drive in SSD slot 2.

About this task

The following image indicates the location of the speakers and provides a visual representation of the removal procedure.

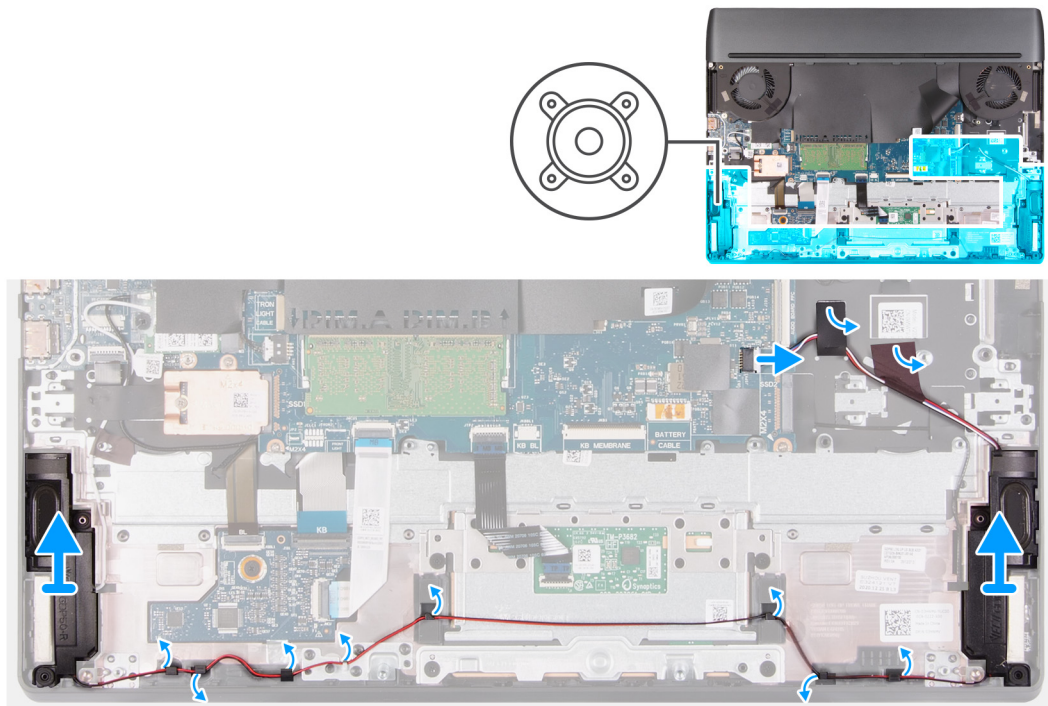

Steps

1. Disconnect the speaker cable from the system board.
2. Peel the tapes that secure the speaker cable to the palm-rest and keyboard assembly.
3. Note the speaker cable routing, and remove the speaker cable from the routing guides on the palm-rest and keyboard assembly.
4. Lift the speakers, along with the cables, off the palm-rest and keyboard assembly.


Installing the speakers

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the speakers and provides a visual representation of the installation procedure.

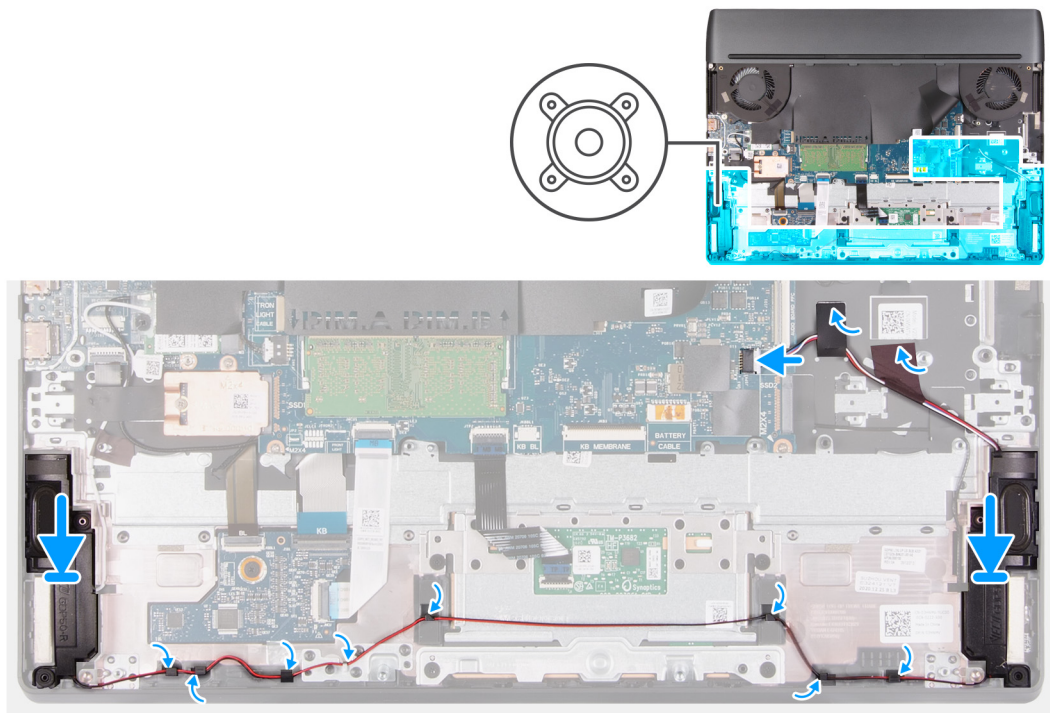

Steps

1. Using the alignment posts and rubber grommets, place the speakers in the slots on the palm-rest and keyboard assembly.
i **NOTE:** If the rubber grommets are pushed out of the speakers when removing the speakers, push them back in place before replacing the speakers.
2. Route the speaker cable through the routing guides on the palm-rest and keyboard assembly.
3. Adhere the tapes that secure the speaker cable to the palm-rest and keyboard assembly.
4. Connect the speaker cable to the system board.

Next steps

1. Install the [2280 solid-state drive 2 in SSD slot 2](#).
i **NOTE:** This step is required if the device is shipped with a 2280 solid-state drive in SSD slot 2.
2. Install the [battery](#).
3. Install the [base cover](#).
4. Follow the procedure in [After working inside your computer](#).

I/O board


Removing the I/O board

Prerequisites

1. Follow the procedure in [Before working inside your computer.](#)
2. Remove the [base cover.](#)

About this task

The following image indicates the location of the I/O board and provides a visual representation of the removal procedure.

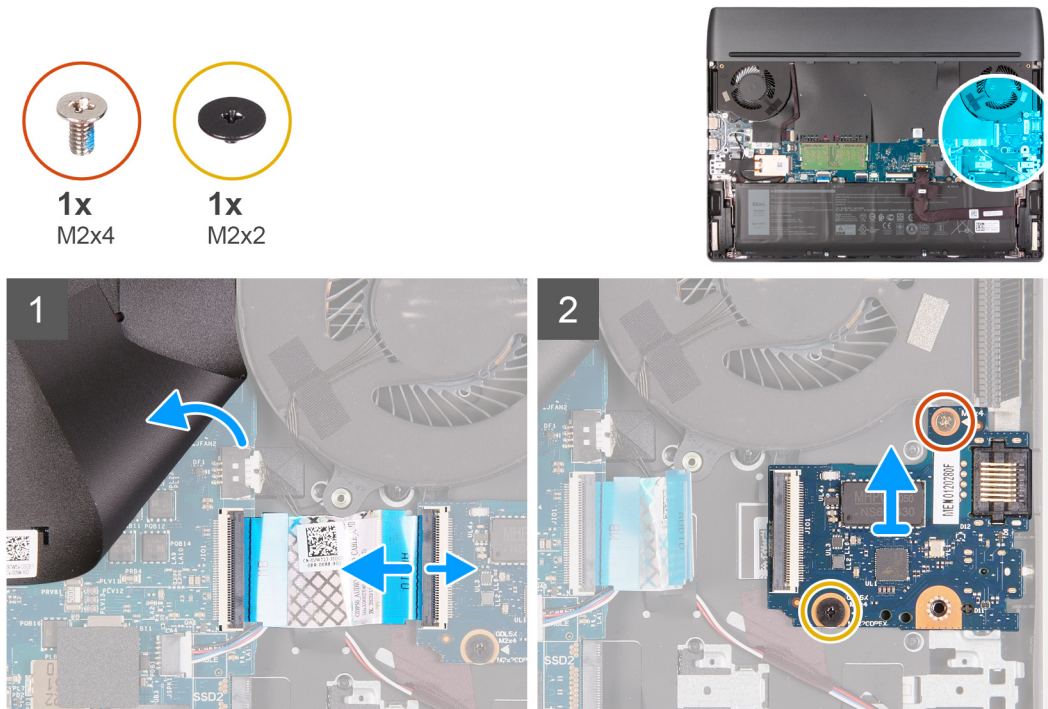

Steps

1. Lift the system board Mylar and open the latch to disconnect the I/O-board cable from the I/O board.
2. Remove the screw (M2x4) that secures the I/O board to the palm-rest and keyboard assembly.
3. Loosen the captive screw (M2x2) that secures the I/O board to the palm-rest and keyboard assembly.
4. Lift the I/O board off the palm-rest and keyboard assembly.




Installing the I/O board

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the I/O board and provides a visual representation of the installation procedure.

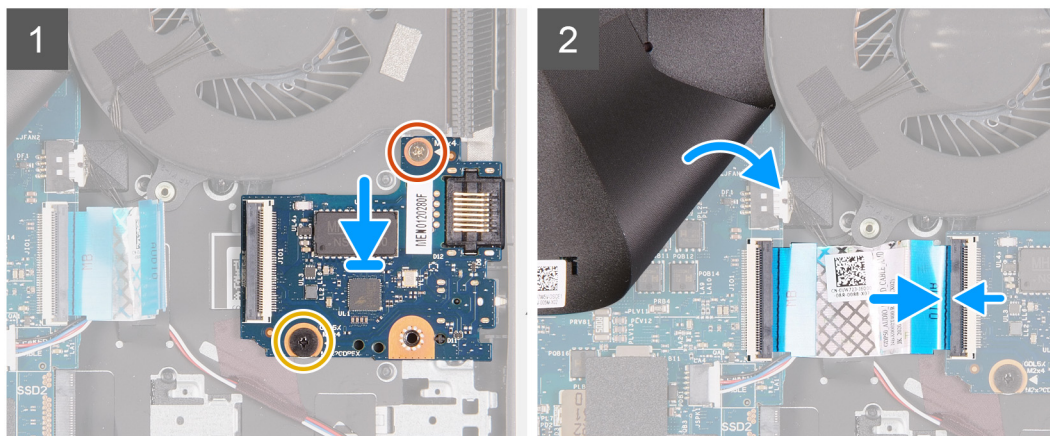

Steps

1. Peel back the system board Mylar.
2. Align and place the I/O board on the palm-rest and keyboard assembly.
3. Replace the screw (M2x4) that secures the I/O board to the palm-rest and keyboard assembly.
4. Tighten the captive screw (M2x2) that secures the I/O board to the palm-rest and keyboard assembly.
5. Connect the I/O-board cable to the I/O board and close the latch to secure the cable.
6. Place the system board Mylar back on the system board.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Memory module



Removing the memory module

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

About this task

The following image indicates the location of the memory module and provides a visual representation of the removal procedure.

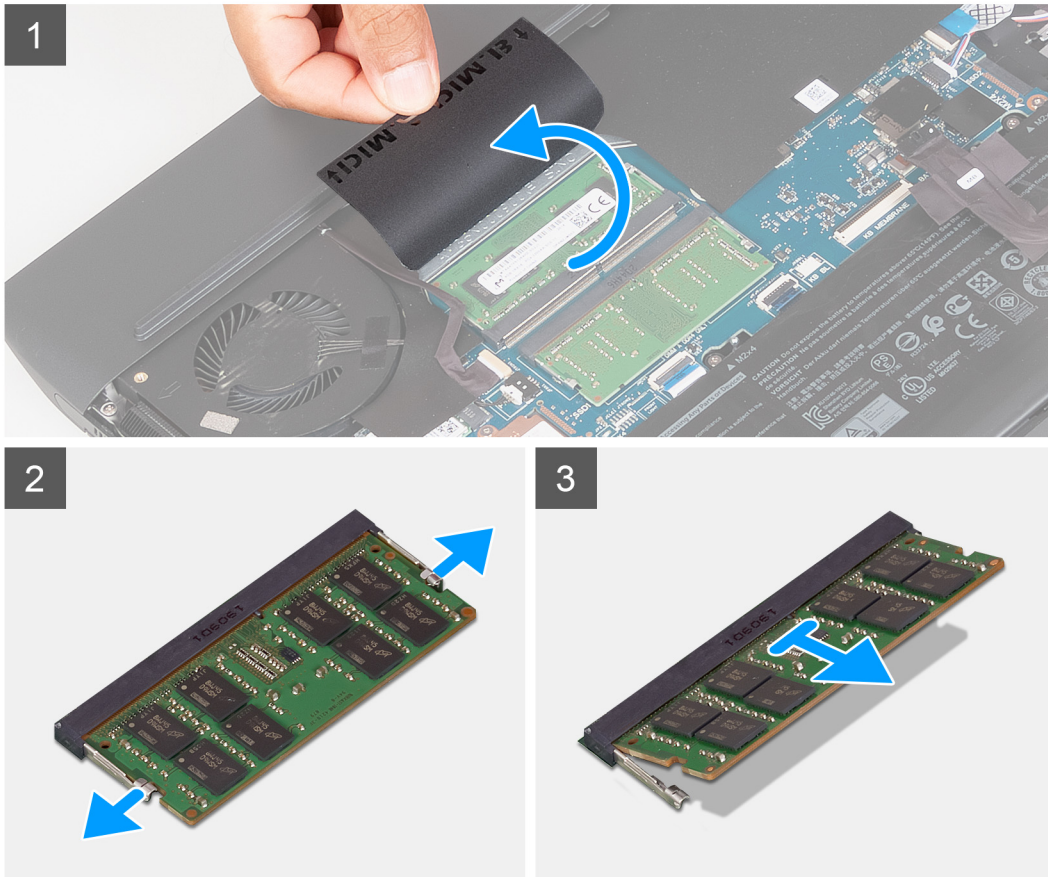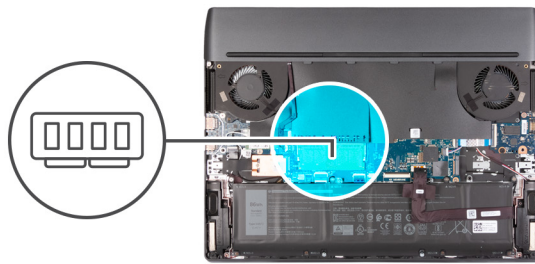

Steps

1. Lift the system board Mylar to access the memory module.
2. Use your fingertips to carefully spread apart the securing-clips on each end of the memory-module slot until the memory module pops up.
3. Remove the memory module from the memory-module slot.

NOTE: Repeat step 1 and step 3 to remove the other memory module, if installed on your computer.





Installing the memory module

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the memory module and provides a visual representation of the installation procedure.

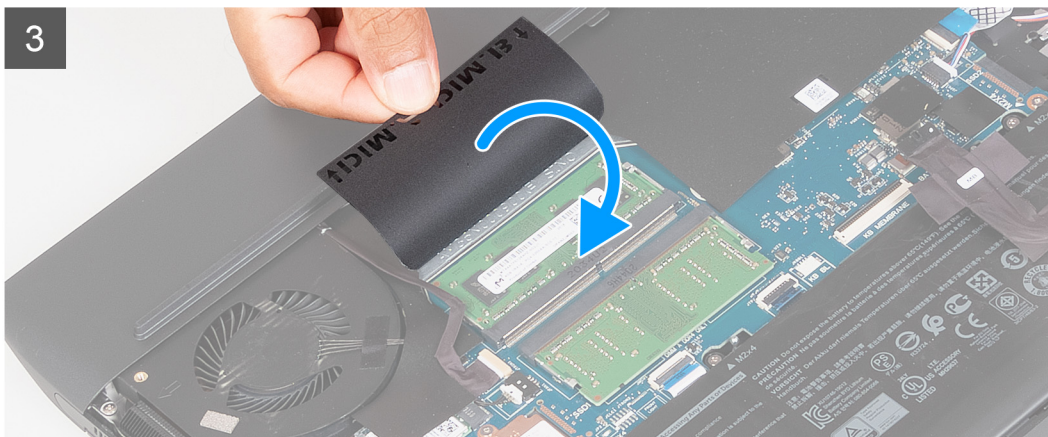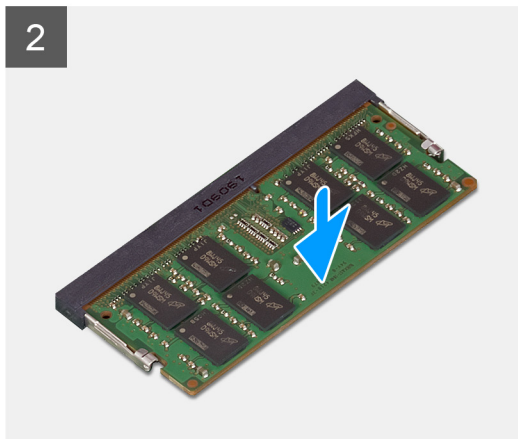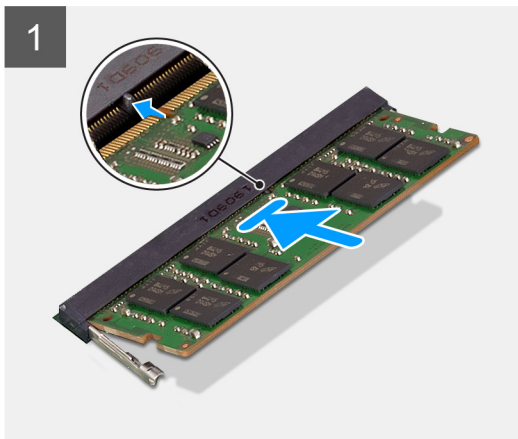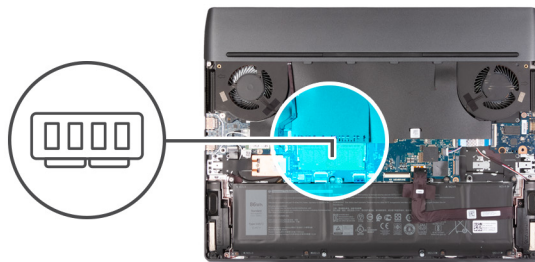

Steps

1. Lift the system board Mylar to access the memory-module slot.
2. Align the notch on the memory module with the tab on the memory-module slot.
3. Slide the memory module firmly into the slot at an angle.
4. Press the memory module down until it clicks into place.

i **NOTE:** If you do not hear the click, remove the memory module and reinstall it.

i **NOTE:** Repeat step 1 to step 3 to install the other memory module, if available on your computer.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Wireless card


Removing the wireless card

Prerequisites

1. Follow the procedure in [Before working inside your computer.](#)
2. Remove the [base cover.](#)

About this task

The following image indicates the location of the wireless card and provides a visual representation of the removal procedure.

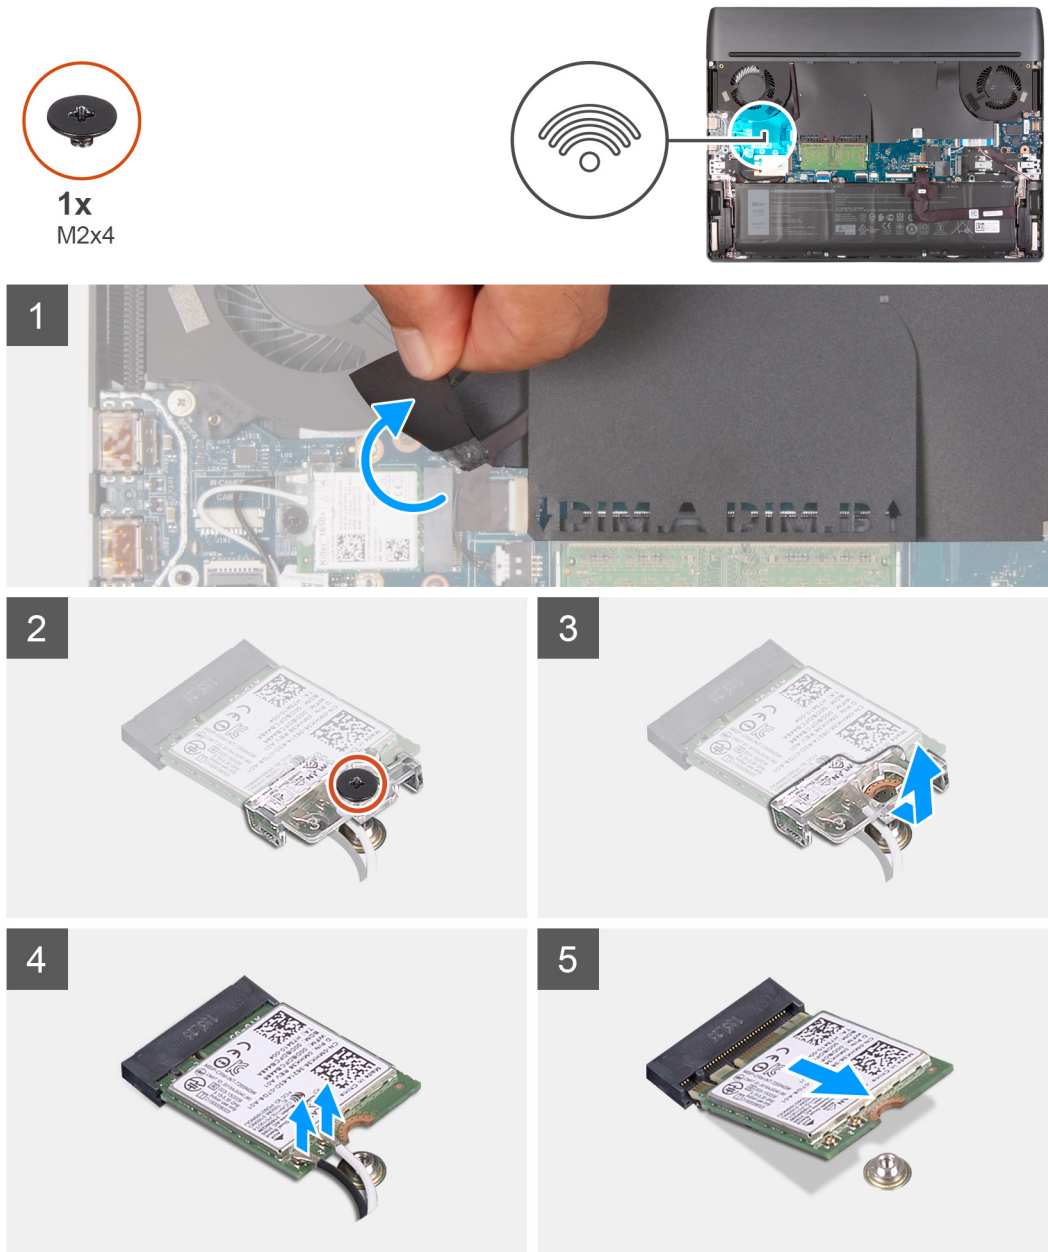

Steps

1. Lift the system board Mylar to access the wireless card.
2. Remove the screw (M2x4) that secures the wireless-card bracket to the system board and palm-rest and keyboard assembly.

3. Lift the wireless-card bracket off the wireless card.
4. Disconnect the antenna cables from the wireless card.
5. Slide and remove the wireless card from the wireless-card slot.


Installing the wireless card

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the wireless card and provides a visual representation of the installation procedure.

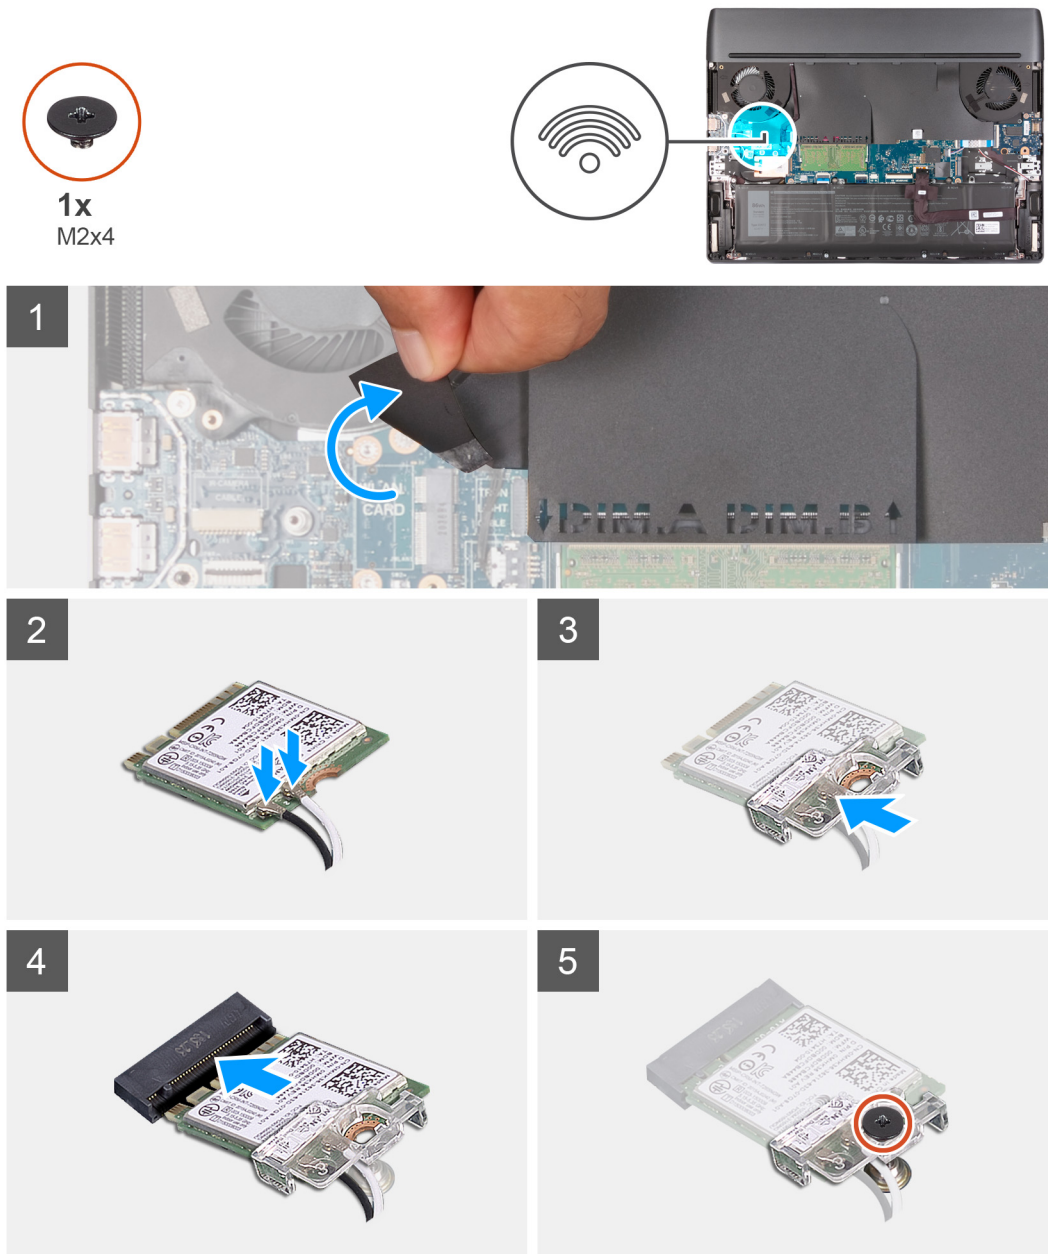

Steps

1. Lift the system board Mylar to access the wireless-card slot.
2. Connect the antenna cables to the wireless card.

The following table provides the antenna-cable color scheme for the wireless card that is supported by your computer.

Table 2. Antenna-cable color scheme

Connectors on the wireless card	Antenna-cable color	Silkscreen marking	
Main	White	MAIN	△ (white triangle)
Auxiliary	Black	AUX	▲ (black triangle)

- 3. Align the notch on the wireless card with the tab on the wireless-card slot and insert the wireless card at an angle into the wireless-card slot.
- 4. Align and place the wireless-card bracket on the wireless card.
- 5. Replace the screw (M2x4) that secures the wireless-card bracket to the system board and palm-rest and keyboard assembly.
- 6. Secure the wireless-card cables to the palm-rest and keyboard assembly with the keyboard Mylar.



Next steps

- 1. Install the [base cover](#).
- 2. Follow the procedure in [After working inside your computer](#).

Rear-I/O cover

Removing the rear I/O-cover

Prerequisites

- 1. Follow the procedure in [Before working inside your computer](#).
- 2. Remove the [base cover](#).

About this task


The following image indicates the location of the rear I/O-cover and provides a visual representation of the removal procedure.



2x
M2.5x5



2x
M2x4



1



2



Steps

1. Remove the two screws (M2x4) that secure the rear I/O-cover to the palm-rest and keyboard assembly.
2. Remove the two screws (M2.5x5) that secure the rear I/O-cover to the palm-rest and keyboard assembly.
3. Disconnect the Tron light cable from the system board.
4. Firmly grasp the sides of your computer with both hands and push the rubber feet on the rear I/O-cover outwards with your thumbs to release the rear I/O-cover from the palm-rest and keyboard assembly.
5. Slide the rear I/O-cover away from the palm-rest and keyboard assembly.



Installing the rear I/O-cover

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the rear I/O-cover and provides a visual representation of the installation procedure.



Steps

1. Slide the rear I/O-cover onto the palm-rest and keyboard assembly until it snaps into place.
2. Replace the two screws (M2x4) that secure the rear I/O-cover to the palm-rest and keyboard assembly.
3. Connect the Tron light cable to the system board.
4. Replace the two screws (M2.5x5) that secure the rear I/O-cover to the palm-rest and keyboard assembly.

Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

Touchpad


Removing the touchpad

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).

About this task

The following image indicates the location of the touchpad and provides a visual representation of the removal procedure.

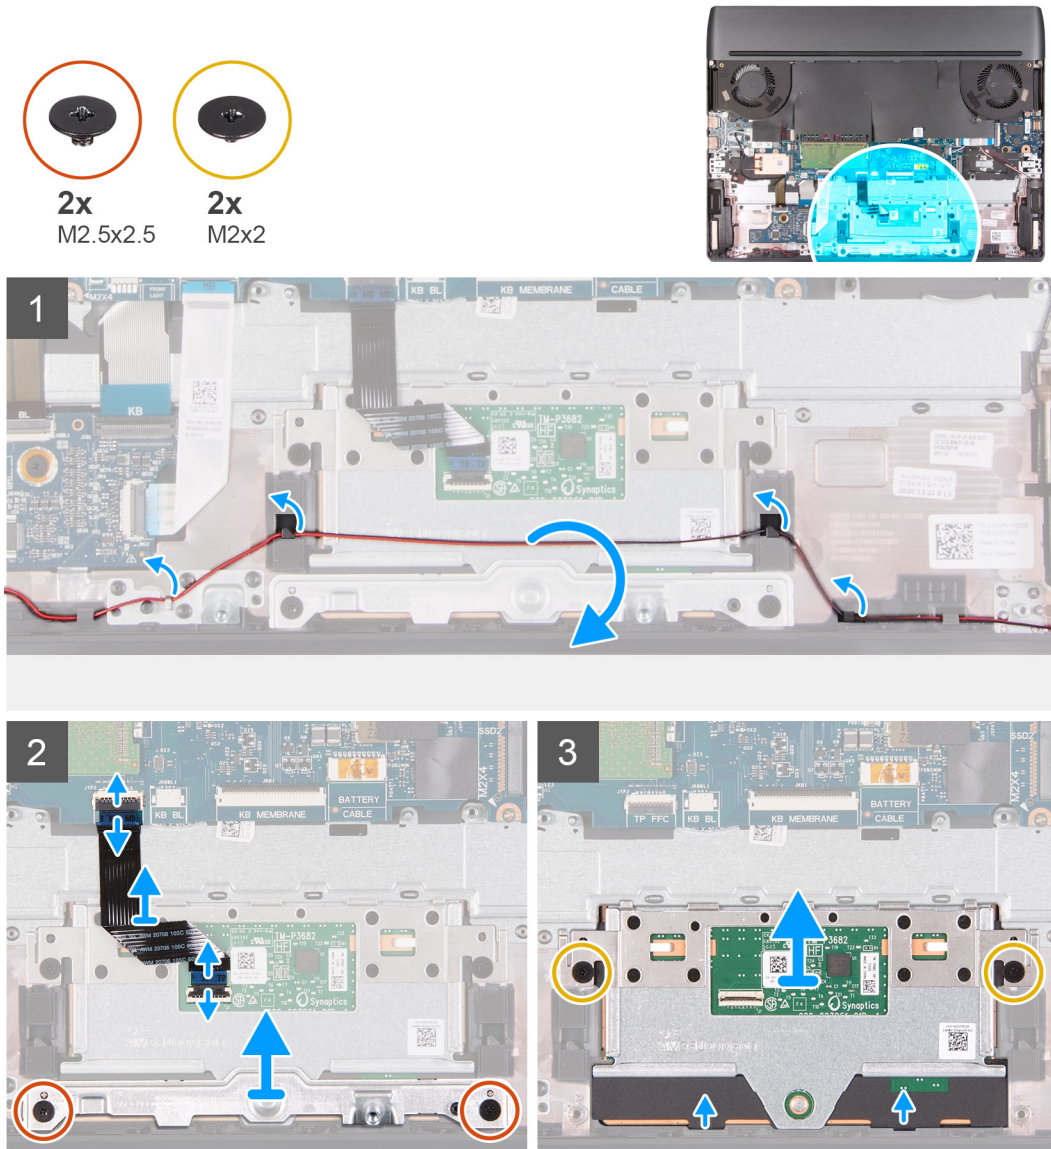

Steps

1. Remove the speaker cable from the routing guides on the palm-rest and keyboard assembly.
 2. Open the latch and disconnect the touchpad cable from the system board.
 3. Open the latch and disconnect the touchpad cable from the touchpad.
 4. Remove the two (M2.5x2.5) screws that secure the touchpad bracket to the palm-rest and keyboard assembly.
 5. Lift the touchpad bracket off the palm-rest and keyboard assembly.
 6. Remove the two (M2x2) screws that secure the touchpad to the palm-rest and keyboard assembly.
 7. Lift the touchpad off the palm-rest and keyboard assembly.
- NOTE:** After removing the touchpad, if the replacement touchpad is not installed immediately, replace the touchpad bracket to the palm-rest and keyboard assembly.


Installing the touchpad

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the touchpad and provides a visual representation of the installation procedure.

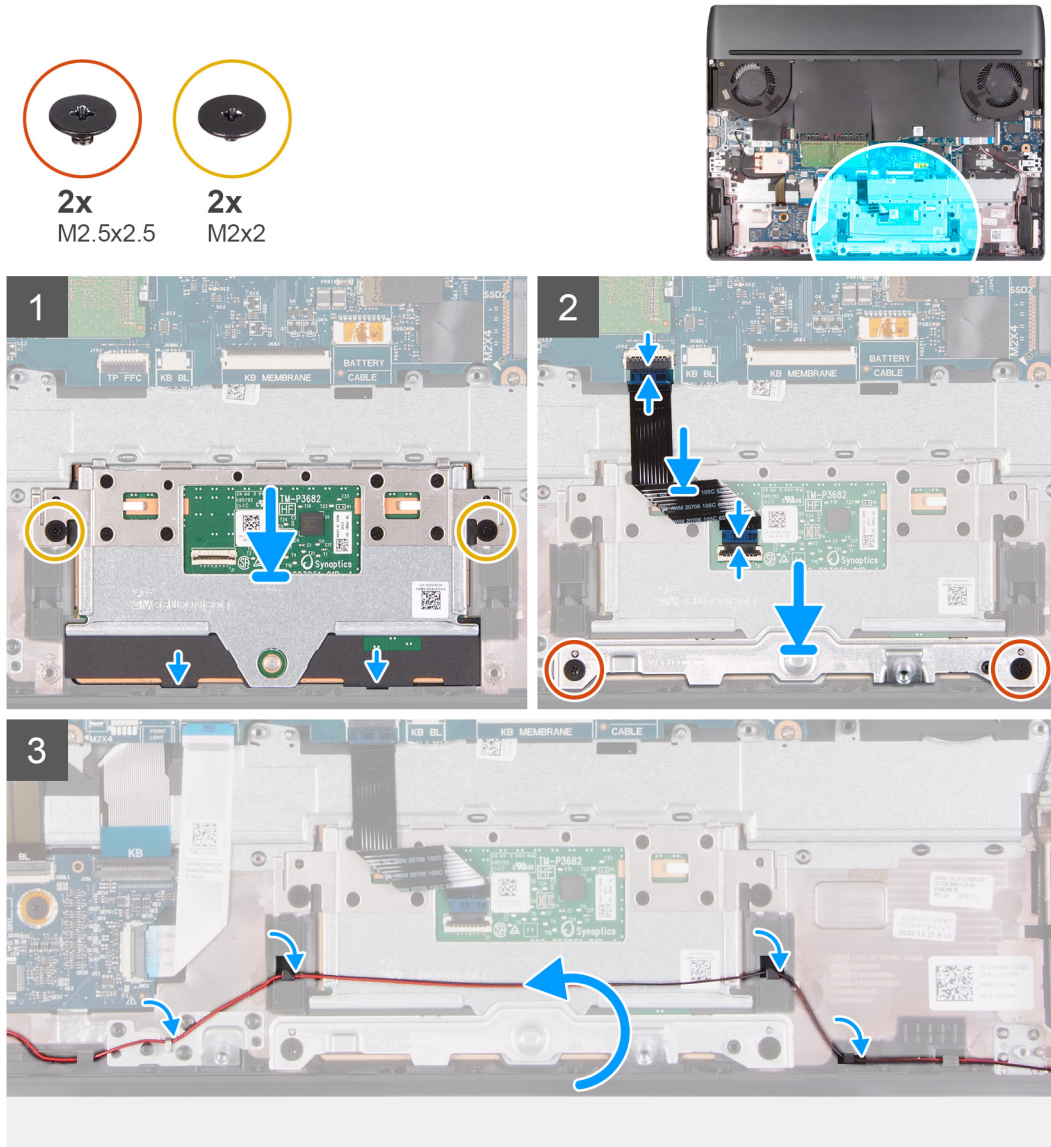

Steps

1. Align and place the touchpad into the slot on the palm-rest and keyboard assembly.
2. Replace the two (M2x2) screws that secure the touchpad to the palm-rest and keyboard assembly.
3. Connect the touchpad cable to the system board and close the latch to secure the cable.
4. Connect the touchpad cable to the touchpad and close the latch to secure the cable.
5. Align and place the touchpad bracket into the slot on the palm-rest and keyboard assembly.
6. Replace the two (M2.5x2.5) screws that secure the touchpad bracket to the palm-rest and keyboard assembly.
7. Route the speaker cable through the routing guides on the palm-rest and keyboard assembly.

Next steps

1. Install the [battery](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

Power-adapter port


Removing the power-adapter port

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [rear I/O-cover](#).

About this task

The following image indicates the location of the power-adapter port and provides a visual representation of the removal procedure.

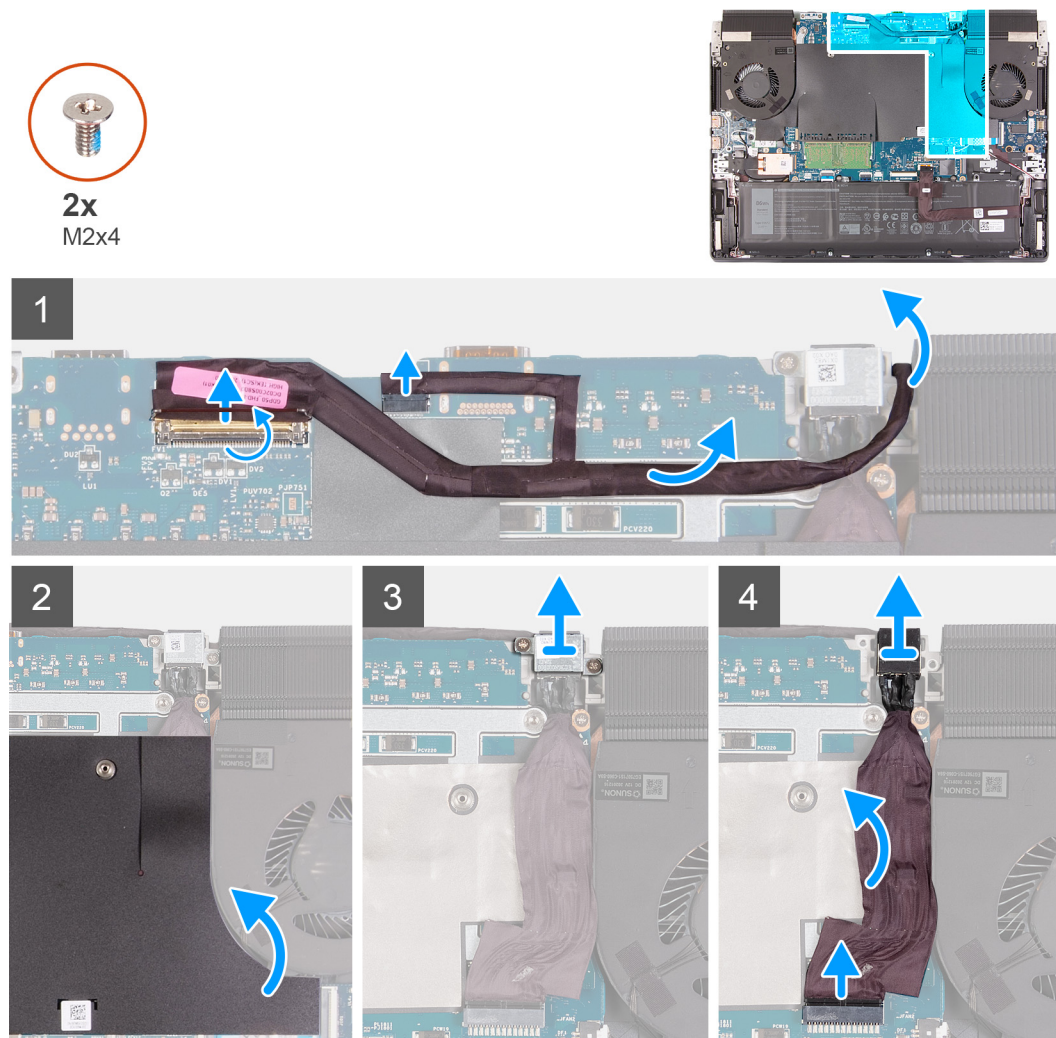

Steps

1. Open the latch and disconnect the display cable from the system board.
2. Disconnect the Alienhead LED cable from the system board.

3. Peel the display cable from the system board and remove the display cable from the slot on the system board.
4. Lift the section of the system board Mylar next to the left cooling fan.
5. Remove the two screws (M2x4) on the power-adapter port-bracket that secures the power-adapter port to the system board.
6. Lift the power-adapter port-bracket off the system board.
7. Disconnect the power-adapter port-cable from the system board.
8. Peel and lift the power-adapter port, along with its cable, off the system board.


Installing the power-adapter port

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the power-adapter port and provides a visual representation of the installation procedure.

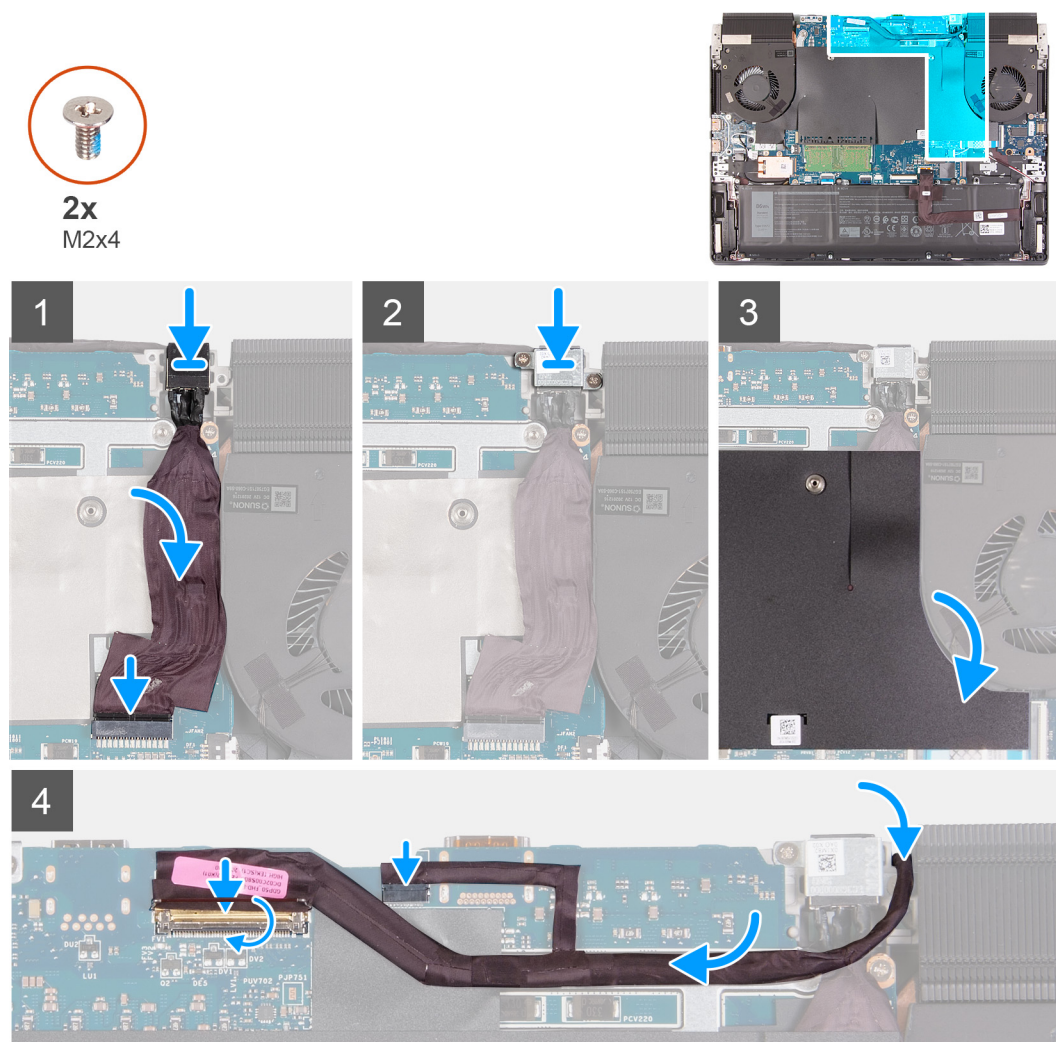

Steps

1. Connect the power-adapter port cable to the system board.
2. Adhere the power-adapter port cable on the system board.
3. Place the power-adapter port into the slot on the system board.
4. Align the screw holes on the power-adapter port bracket to the screw holes on the system board.

5. Replace the two screws (M2x4) that secure the power-adapter port bracket to the system board.
6. Replace the system board Mylar back to the edge of the left cooling fan.
7. Route the display cable through the opening between the power-adapter port and the heat-sink assembly.



8. Connect the display cable on the system board and close the latch to secure the cable.
9. Connect the Alienhead LED cable to the system board.
10. Adhere the display cable to the system board.

Next steps

1. Install the [rear I/O-cover](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

Display assembly



Removing the display assembly

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [rear I/O-cover](#).

About this task

The following images indicate the location of the display assembly and provide a visual representation of the removal procedure.

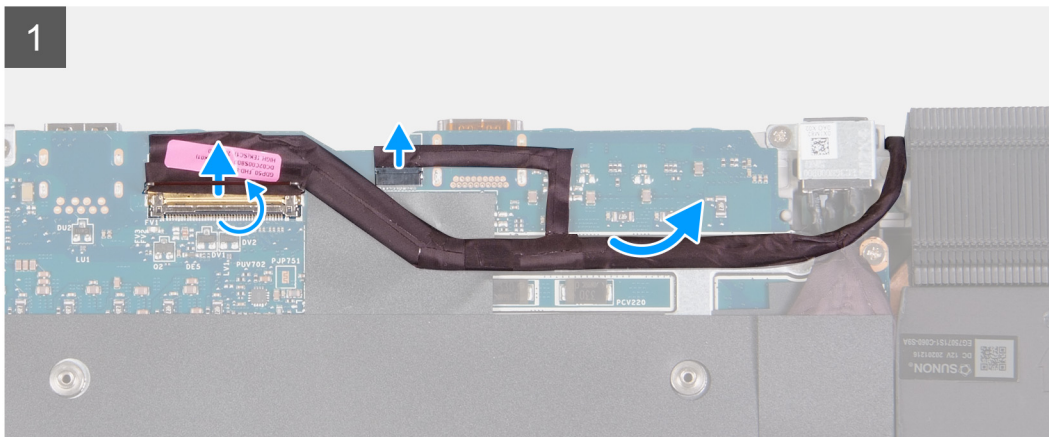



6x
M2.5x5



Steps

1. Open the latch and disconnect the display cable from the system board.
2. Disconnect the Alienhead LED cable from the system board.
3. Disconnect the RGB-IR camera cable from the USB board.
i **NOTE:** This step applies to devices that are shipped with a hybrid RGB-IR camera module.
4. Lift the system board Mylar and peel the tapes that secure the RGB-IR camera cable to the system board.
i **NOTE:** This step applies to devices that are shipped with a hybrid RGB-IR camera module.
5. Lift the RGB-IR camera cable off the system board.
i **NOTE:** This step applies to devices that are shipped with a hybrid RGB-IR camera module.
6. Turn the computer over and place the computer on a clean and flat surface.
7. Remove the display cable from the routing guides on the palm-rest and keyboard assembly.
8. Remove the RGB-IR camera cable from the routing guides on the palm-rest and keyboard assembly.
i **NOTE:** This step applies to devices that are shipped with a hybrid RGB-IR camera module.
9. Remove the six screws (M2.5x5) that secure the display hinges to the palm-rest and keyboard assembly.

10. Lift the display assembly off the palm-rest and keyboard assembly.
11. After performing all the above steps, you are left with the display assembly.



Installing the display assembly

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.



About this task

The following image indicates the location of the display assembly and provides a visual representation of the installation procedure.



6x
M2.5x5



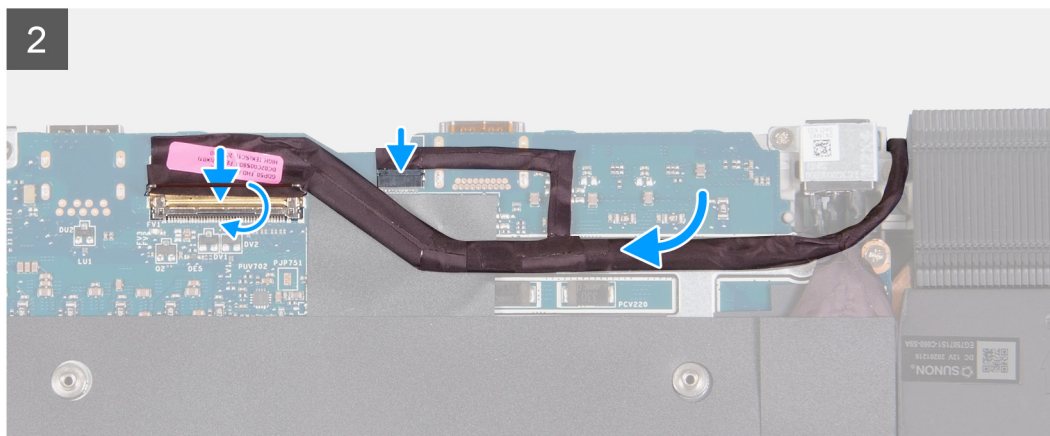

Steps

1. Align the screw holes on the display hinges with screw holes on the palm-rest and keyboard assembly and place the display assembly on the palm-rest and keyboard assembly.
2. Route the display cable through the routing guides on the palm-rest and keyboard assembly.
3. Route the RGB-IR camera cable through the routing guides on the palm-rest and keyboard assembly.

i NOTE: This step applies to devices that are shipped with a hybrid RGB-IR camera module.

4. Replace six screws (M2.5x5) that secure the display hinges to the palm-rest and keyboard assembly.
5. Turn the computer over.
6. Connect the display cable to the connector on the system board and close the latch to secure the cable.
7. Connect the Alienhead LED cable to the system board.
8. Adhere the display cable to the system board.
9. Lift the system board Mylar.
10. Adhere the RGB-IR camera cable to the system board along the edge of right fan of the heatsink assembly.

i NOTE: This step applies to devices that are shipped with a hybrid RGB-IR camera module.

11. Connect the RGB-IR camera cable to the USB board.

i NOTE: This step applies to devices that are shipped with a hybrid RGB-IR camera module.

12. Place the system board Mylar back onto the system board.

Next steps

1. Install the [rear I/O-cover](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

Keyboard-controller board


Removing the keyboard-controller board

Prerequisites

1. Follow the procedure in [Before working inside your computer.](#)
2. Remove the [base cover.](#)
3. Remove the [battery.](#)

About this task

The following image indicates the location of the keyboard-controller board and provides a visual representation of the removal procedure.

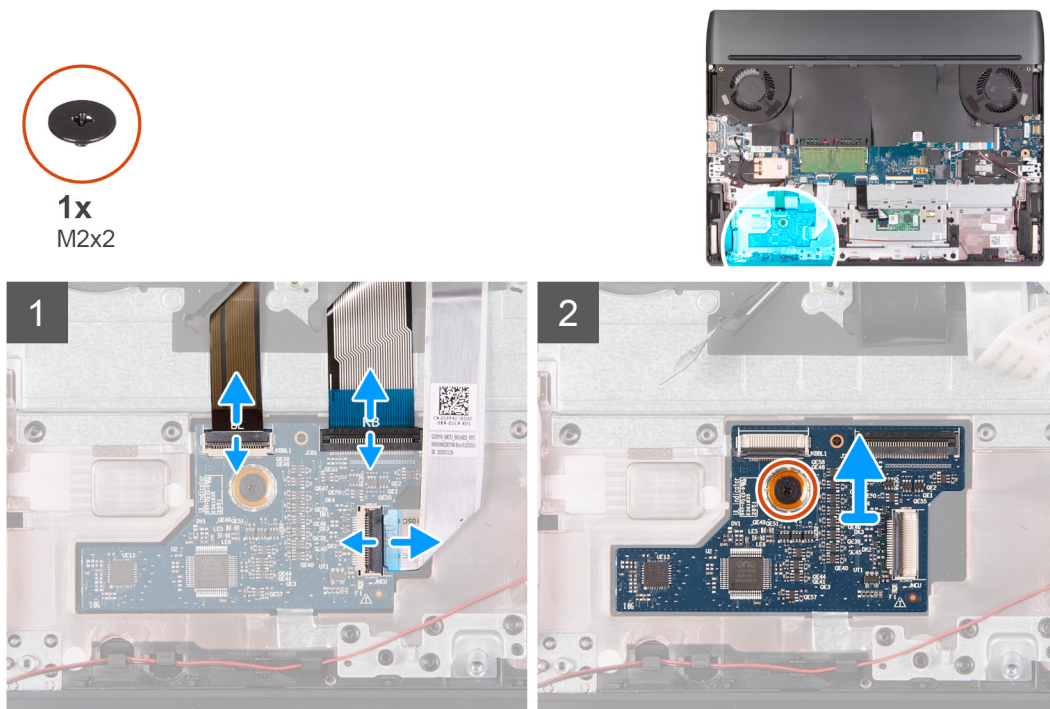

Steps

1. Open the latch and disconnect the keyboard-backlight cable from the keyboard-controller board.
2. Open the latch and disconnect the keyboard cable from the keyboard-controller board.
3. Open the latch and disconnect the keyboard-controller board cable from the keyboard-controller board.
4. Remove the screw (M2x2) that secures the keyboard-controller board to the palm-rest and keyboard assembly.
5. Remove the keyboard-controller board off the palm-rest and keyboard assembly.

Installing the keyboard-controller board

Prerequisites




If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the keyboard-controller board and provides a visual representation of the installation procedure.



1x
M2x2

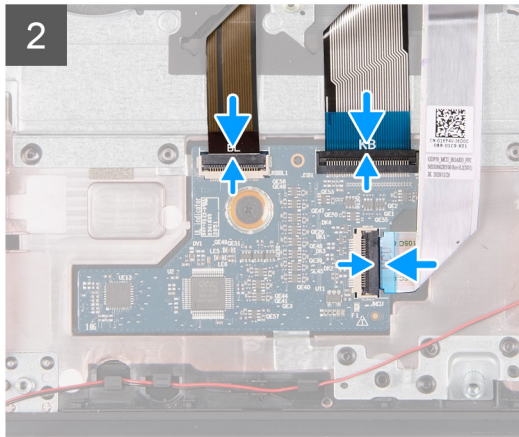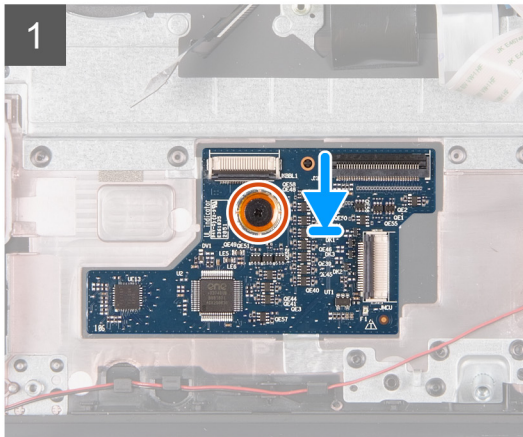

Steps

1. Using the alignment posts, adhere the keyboard-controller board into the slot on the palm-rest and keyboard assembly.
2. Align the screw hole on the keyboard-controller board with the screw hole on the palm-rest and keyboard assembly.
3. Replace the screw (M2x2) that secures the keyboard-controller board to the palm-rest and keyboard assembly.
4. Connect the keyboard-controller board cable to the keyboard-controller board and close the latch to secure the cable.
5. Connect the keyboard cable to the keyboard-controller board and close the latch to secure the cable.
6. Connect the keyboard-backlight cable to the keyboard-controller board and close the latch to secure the cable.

Next steps

1. Install the [battery](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

System board

Removing the system board


Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
 - NOTE:** Replacing the system board removes any changes that you have made to the BIOS using the BIOS setup program. Make the appropriate changes again after you replace the system board.
 - NOTE:** Before disconnecting the cables from the system board, note the location of the connectors so that you can reconnect the cables correctly after you replace the system board.
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
5. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
6. Remove the [memory module](#).
7. Remove the [wireless card](#).

8. Remove the [rear I/O-cover](#).
9. Remove the system board Mylar.

About this task

The following image indicates the connectors on your system board.

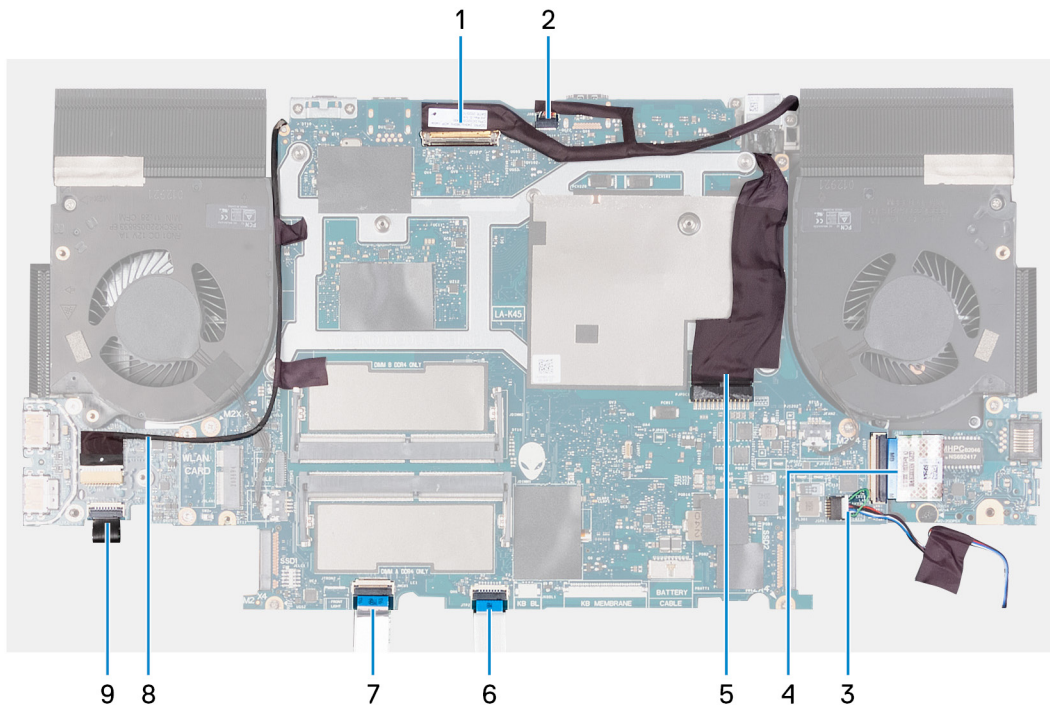

NOTE: This is an image of the system board that supports Intel processors. The cables are also found on the system board that supports AMD processors.

1. Display cable
2. Alienhead LED cable
3. Speaker cable
4. I/O-board cable
5. Power-adaptor port cable
6. Touchpad cable
7. Keyboard-controller board cable
8. RGB-IR camera cable




NOTE: This applies to devices that are shipped with a hybrid RGB-IR camera module.


9. Power-button board cable

The following image indicates the location of the system board and provides a visual representation of the removal procedure.



9x
M2x4

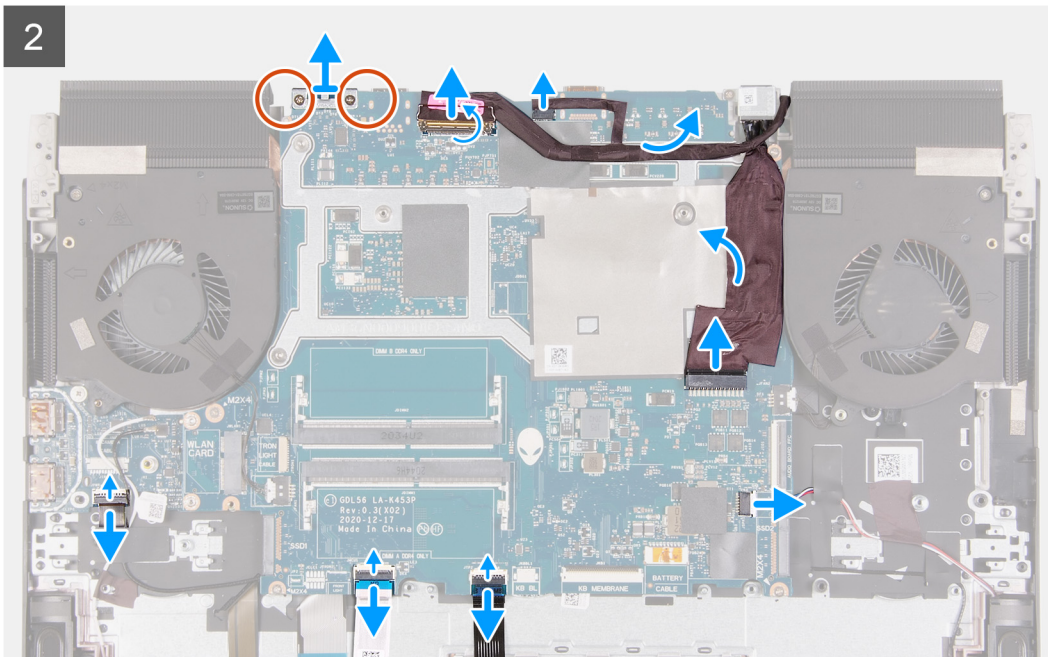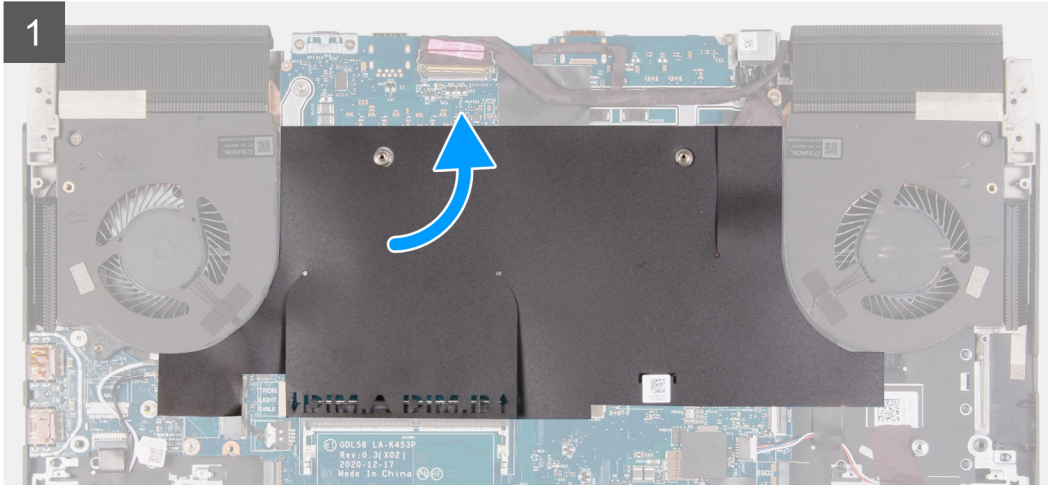

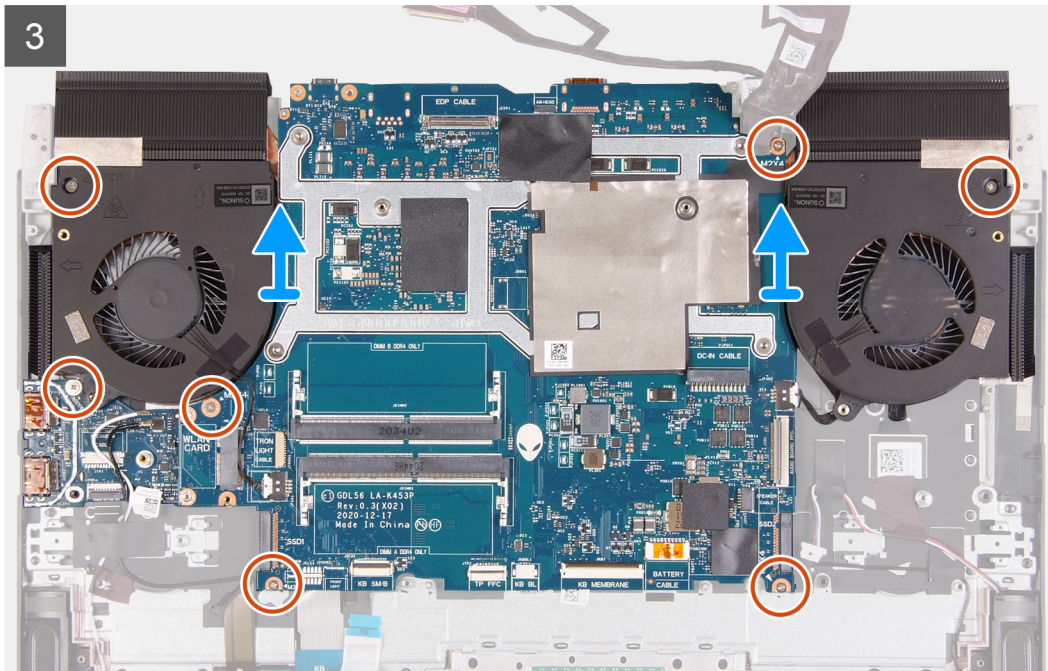

Steps

1. Remove the two screws (M2x4) that secure the USB Type-C port bracket to the system board.
2. Remove the USB Type-C port bracket from the system board.
3. Open the latch, and disconnect the display cable from the system board.
4. Disconnect the Alienhead LED cable from the system board.
5. Peel the display cable from the system board.
6. Disconnect the power-adaptor port cable from the system board.
7. Peel the power-adaptor port cable from the system board.
8. Disconnect the I/O-board cable from the system board.
9. Disconnect the speaker cable from the system board.
10. Open the latch, and disconnect the touchpad cable from the system board.
11. Open the latch, and disconnect the keyboard-controller board-cable from the system board.
12. Open the latch, and disconnect the power-button board cable from the USB board.
13. Open the latch, and disconnect the RGB-IR camera cable from the USB board.

i **NOTE:** This step is applicable for devices that are shipped with a hybrid RGB-IR camera module.

14. Peel the RGB-IR camera cable from the system board.


i **NOTE:** This step is applicable for devices that are shipped with a hybrid RGB-IR camera module.

15. Remove the seven (M2x4) screws that secure the system board to the palm-rest and keyboard assembly.


i **NOTE:** The USB board and heat sink are attached to the system board.

△ **CAUTION:** Before removing the system board, give sufficient time for the heat sink to cool down to avoid injury.

16. Lift the system-board assembly off the palm-rest and keyboard assembly.

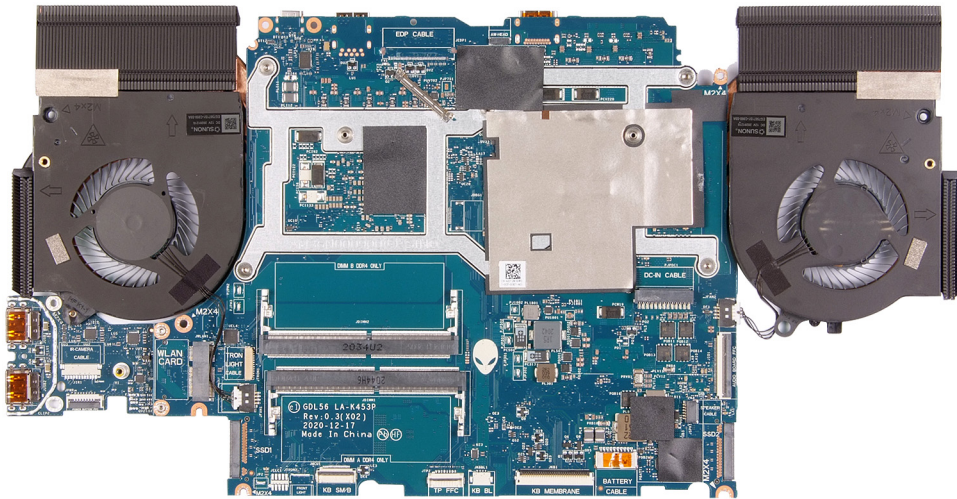

17. Place the system-board assembly on a clean and flat surface.
18. Turn the system-board assembly over.
19. Remove the [USB board](#).
20. Remove the [heat-sink assembly](#).
21. After performing all the above steps, you are left with the system board.

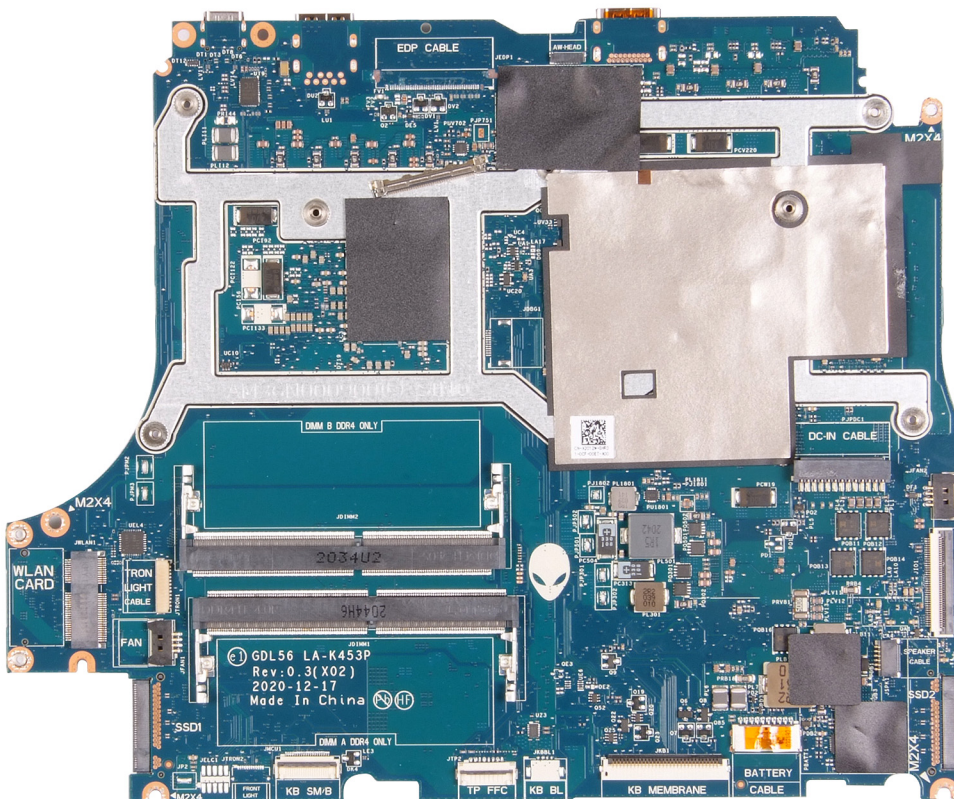

Installing the system board

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.


- ① **NOTE:** Replacing the system board removes any changes that you have made to the BIOS using the BIOS setup program. Make the appropriate changes again after you replace the system board.



About this task

The following image indicates the connectors on your system board.

1. Display cable
2. Alienhead LED cable
3. Speaker cable
4. I/O-board cable
5. Power-adaptor port cable
6. Touchpad cable
7. Keyboard cable
8. RGB-IR camera cable
9. Power button cable

The following image indicates the location of the system board and provides a visual representation of the installation procedure.

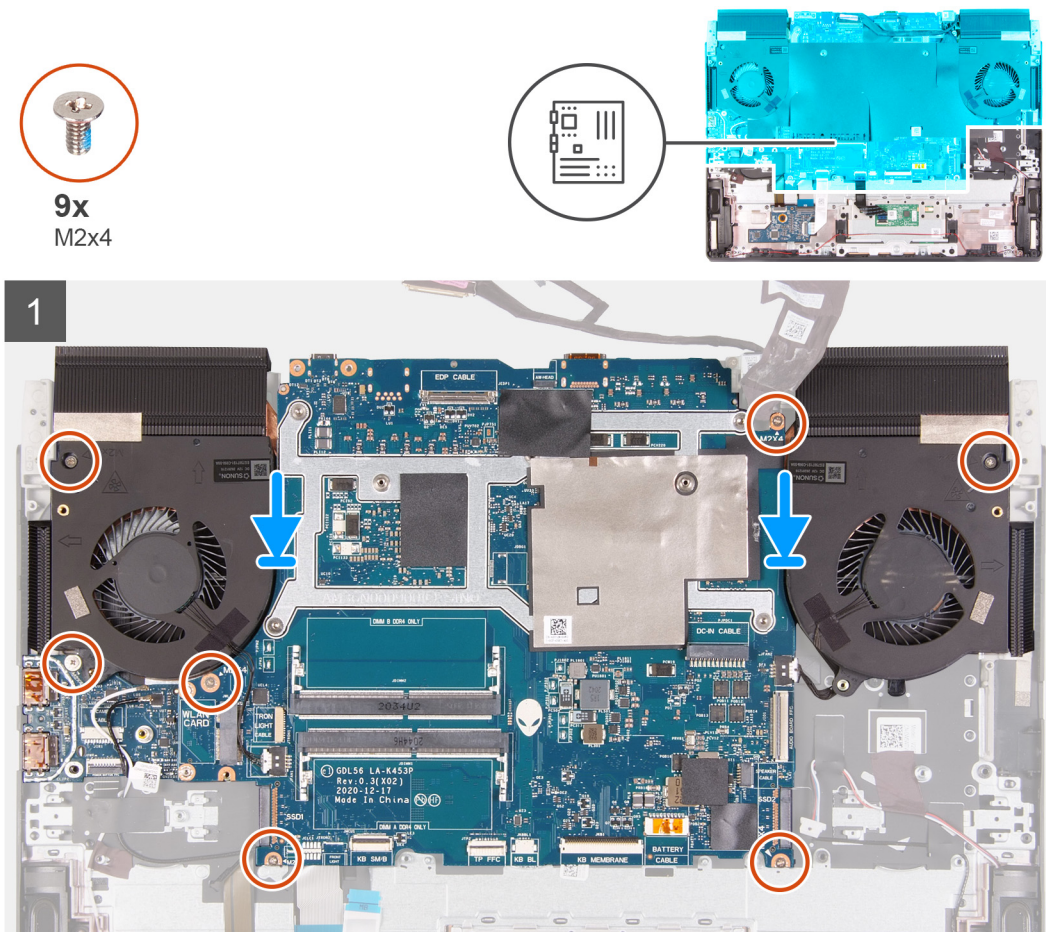

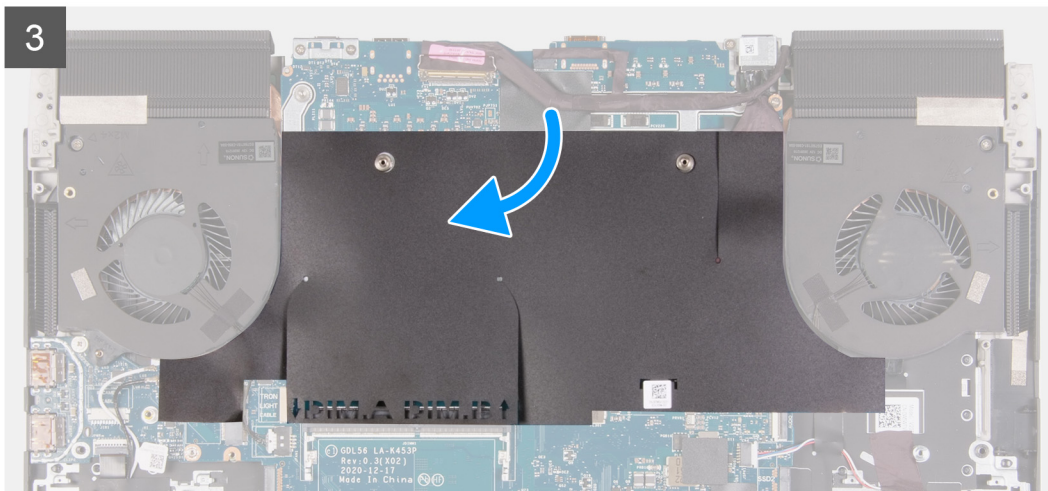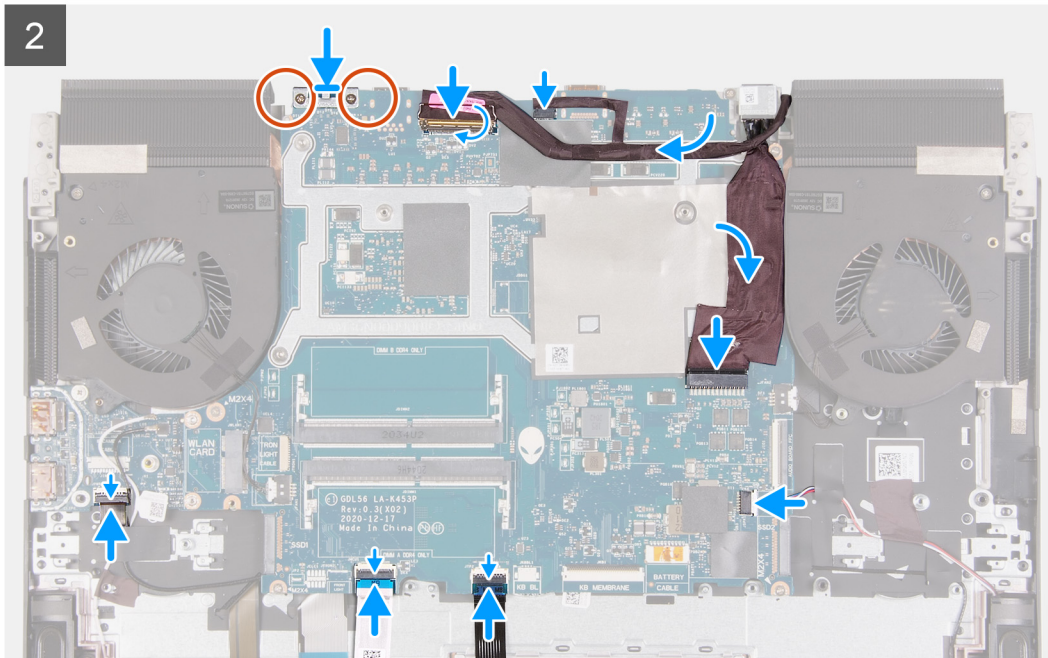

Steps

1.  **NOTE:** Place the system board on a clean and flat surface.
Replace the [USB board](#).
2. Replace the [heat-sink assembly](#).
3. Turn the system-board assembly over.
4. Align the screw holes on the system-board assembly with the screw holes on the palm-rest and keyboard assembly.
5. Route the power-button board cable under the USB board.
6. Replace the seven screws (M2x4) that secure the system-board assembly to the palm-rest and keyboard assembly.
7. Align the screw holes on the USB Type-C port bracket with the screw holes on the system board.
 **NOTE:** The USB Type-C port bracket must be removed from the previous system board and placed at the new system board.
This step is applicable if a new system board is replacing the previous system board.
8. Replace the two screws (M2x4) that secure the USB Type-C bracket to the system board.
9. Connect the display cable to the system board and close the latch to secure the cable.
 **NOTE:** Move in clock-wise direction to connect the cables to the system board.
10. Connect the Alienhead LED cable to the system board.

11. Adhere the display cable to the system board.
12. Adhere the power-adapter port cable to the system board, and connect the power-adapter port cable to the system board.
13. Connect the I/O-board cable to the system board.
14. Connect the speaker cable to the system board.
15. Connect the touchpad cable to the system board and close the latch to secure the cable.
16. Connect the keyboard-controller board-cable to the system board and close the latch to secure the cable.
17. Connect the power-button board cable to the USB board and close the latch to secure the cable.
18. Adhere the RGB-IR camera cable to the system board along the edge of right cooling fan of the heatsink assembly.

 **NOTE:** This step is applicable for devices that are shipped with a hybrid RGB-IR camera module.

19. Connect the RGB-IR camera cable to the connector and close the latch to secure the cable to the USB board.

 **NOTE:** This step is applicable for devices that are shipped with a hybrid RGB-IR camera module.

20. Replace the system board Mylar on the system board.

Next steps

1. Install the [rear I/O-cover](#).
2. Install the [wireless card](#).
3. Install the [memory module](#).
4. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
5. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
6. Install the [battery](#).
7. Install the [base cover](#).
8. Follow the procedure in [After working inside your computer](#).

Heat-sink assembly

Removing the heat-sink assembly

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).

 **CAUTION:** For maximum cooling of the processor, do not touch the heat transfer areas on the heat sink. The oils in your skin can reduce the heat transfer capability of the thermal grease.

 **NOTE:** The heat sink may become hot during normal operation. Allow sufficient time for the heat sink to cool before you touch it.

2. Remove the [base cover](#).
3. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
4. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
5. Remove the [I/O board](#).
6. Remove the [memory module](#).
7. Remove the [wireless card](#).
8. Remove the [battery](#).
9. Remove the [rear I/O-cover](#).
10. Follow the procedure from step 1 to step 16 in [Removing the system board](#).


 **NOTE:** System board can be removed with the heat-sink assembly and USB board attached.

About this task

The following image indicates the location of the heat-sink assembly and provides a visual representation of the removal procedure.



6x
M2x4

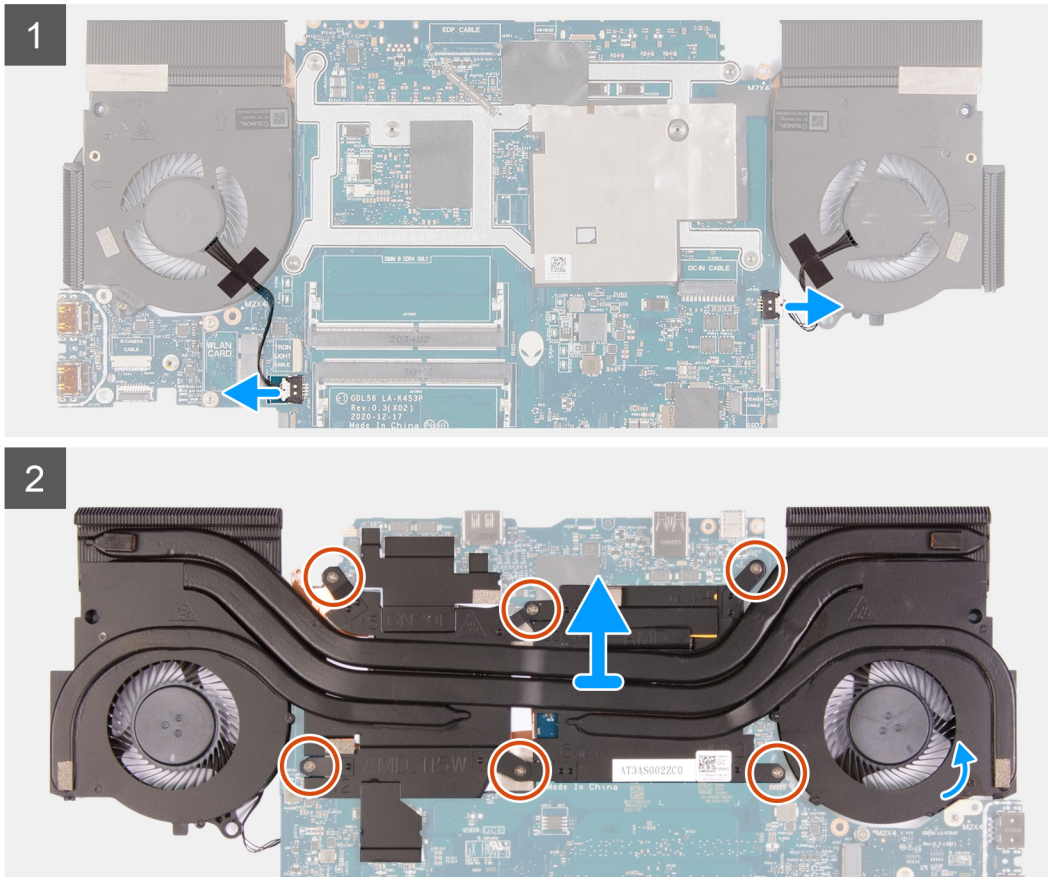

Steps

1. Disconnect the left and right fan cables from the system board.
2. Turn the system-board assembly over.
3. Remove the six screws (M2x4) that secure the heat-sink assembly to the system board.
4. Lift the heat-sink assembly off the system board.

Installing the heat-sink assembly

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task


The following image indicates the location of the heat-sink assembly and provides a visual representation of the installation procedure.

⚠ CAUTION: Incorrect alignment of the heat sink can damage the system board and processor.

CAUTION: If either the processor or the heat sink is replaced, use the thermal grease that is provided in the kit to ensure that thermal conductivity is achieved.



6x
M2x4

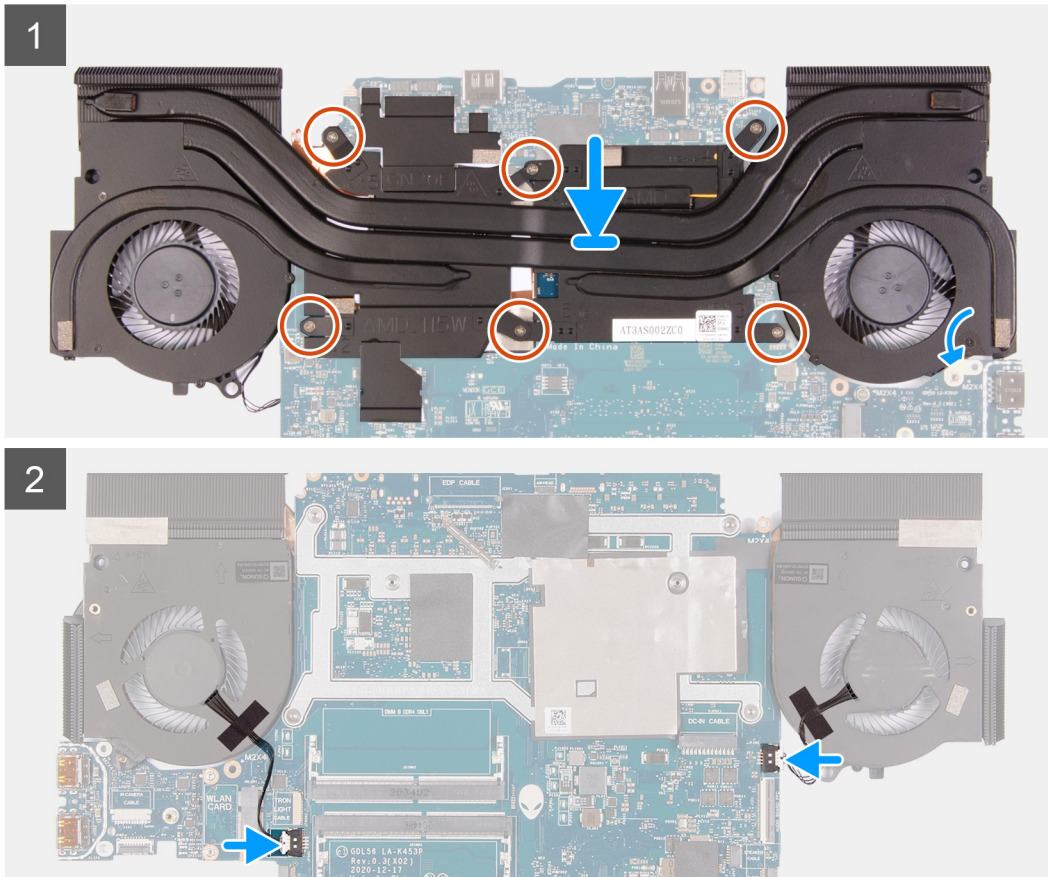

Steps

1. Place the heat-sink assembly on the system board.
2. Align the screw holes on the heat-sink assembly with the screw holes on the system board.
3. Replace the six screws (M2x4) that secure the heat-sink assembly to the system board.
4. Turn the system board over, and connect the left and right fan cables.

Next steps

1. Follow the procedure from step 4 to step 20 in [Installing the system board](#).
2. Install the [rear I/O-cover](#).
3. Install the [battery](#).
4. Install the [wireless card](#).
5. Install the [memory module](#).
6. Install the [I/O board](#).
7. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
8. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
9. Install the [base cover](#).

10. Follow the procedure in [After working inside your computer.](#)

USB board

Removing the USB board


Prerequisites

1. Follow the procedure in [Before working inside your computer.](#)
2. Remove the [base cover.](#)
3. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
4. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
5. Remove the [I/O board.](#)
6. Remove the [memory module.](#)
7. Remove the [wireless card.](#)
8. Remove the [battery.](#)
9. Remove the [rear I/O-cover.](#)
10. Follow the procedure from step 1 to step 16 in [Removing the system board.](#)

NOTE: System board can be removed with the heat sink, I/O board, and USB board attached.

About this task

The following image indicates the location of the USB board and provides a visual representation of the removal procedure.

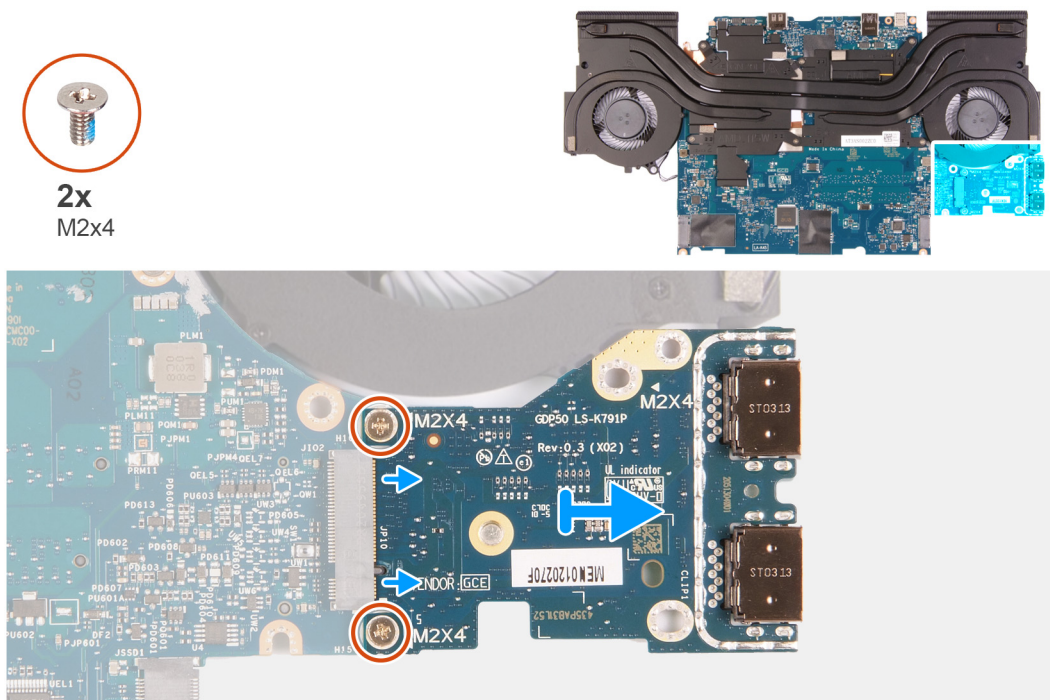

Steps

1. Turn the system-board assembly over.
2. Remove the two screws (M2x4) that secure the USB board to the system board.
3. Remove the USB board from the system board.


Installing the USB board

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the USB board and provides a visual representation of the installation procedure.

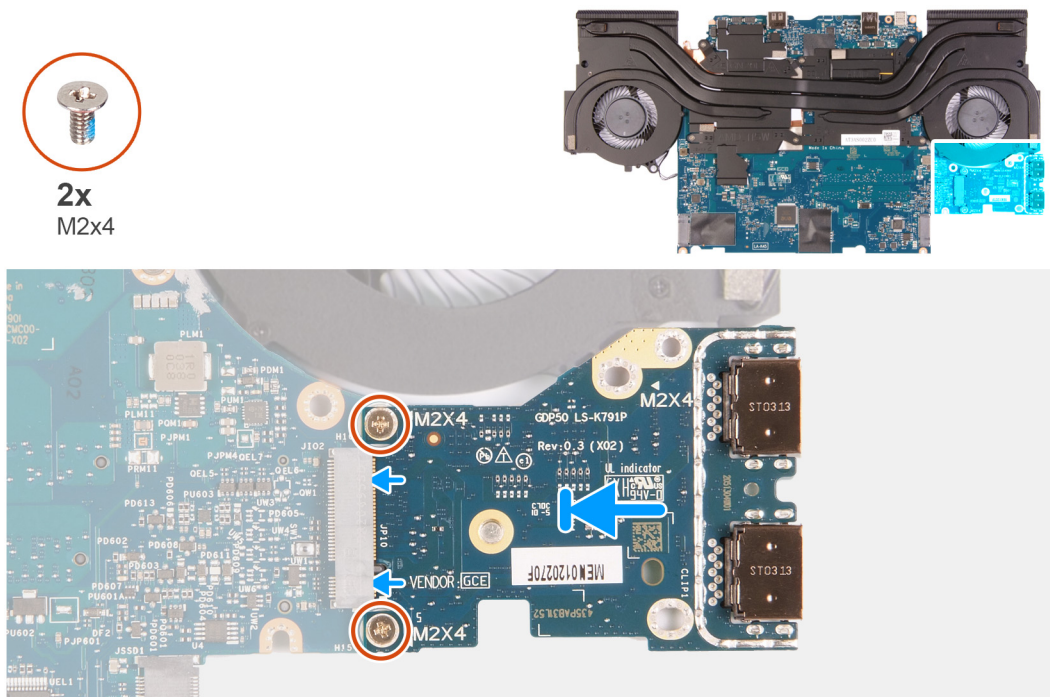

Steps

1. Align the screw holes on the USB board with the screw holes on the system board.
2. Replace the two screws (M2x4) that secure the USB board to the system board.

Next steps

1. Follow the procedure from step 4 to step 20 in [Installing the system board](#).
2. Install the [rear I/O cover](#).
3. Install the [battery](#).
4. Install the [wireless card](#).
5. Install the [memory module](#).
6. Install the [I/O board](#).
7. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
8. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
9. Install the [base cover](#).
10. Follow the procedure in [After working inside your computer](#).

Power button

Removing the power button


Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
4. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
5. Remove the [I/O board](#).
6. Remove the [memory module](#).
7. Remove the [wireless card](#).
8. Remove the [display assembly](#).
9. Remove the [battery](#).
10. Remove the [rear I/O-cover](#).
11. Follow the procedure from step 1 to step 16 in [Removing the system board](#).

i **NOTE:** System board can be removed with the heat-sink assembly and USB board attached.

About this task

The following images indicate the location of the power button and provide a visual representation of the removal procedure.

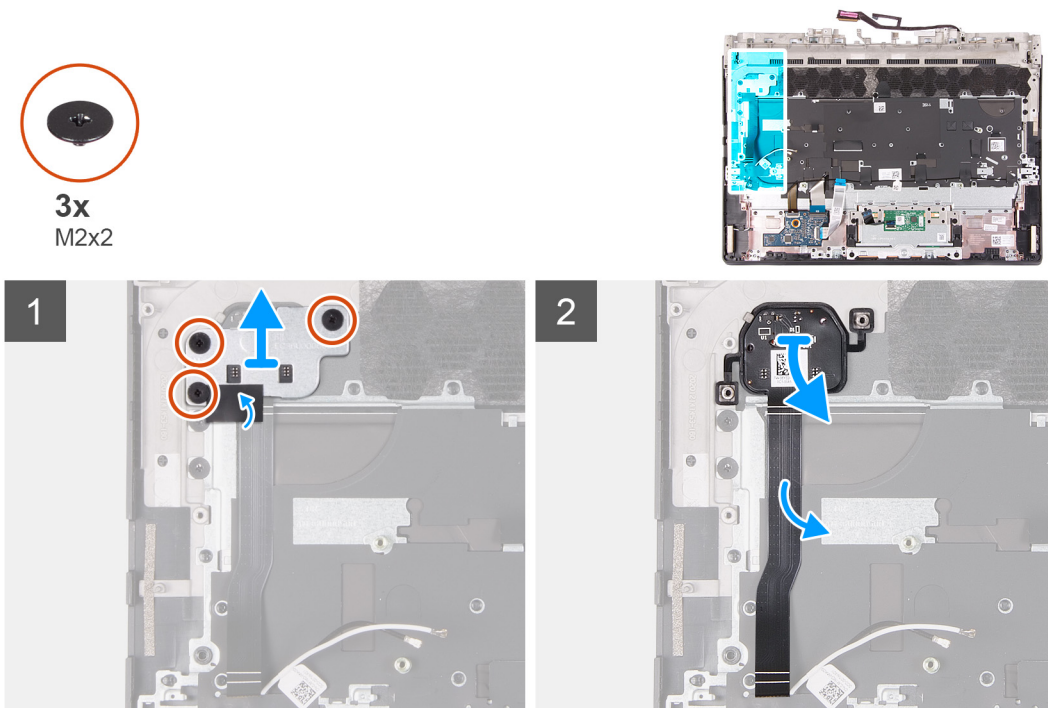

Steps

1. Remove the three screws (M2x2) that secure the power-button bracket to the palm-rest and keyboard assembly.
2. Lift the power-button bracket off the palm-rest and keyboard assembly.
3. Peel and lift the power button off the palm-rest and keyboard assembly.


Installing the power button

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The following image indicates the location of the power button and provides a visual representation of the installation procedure.

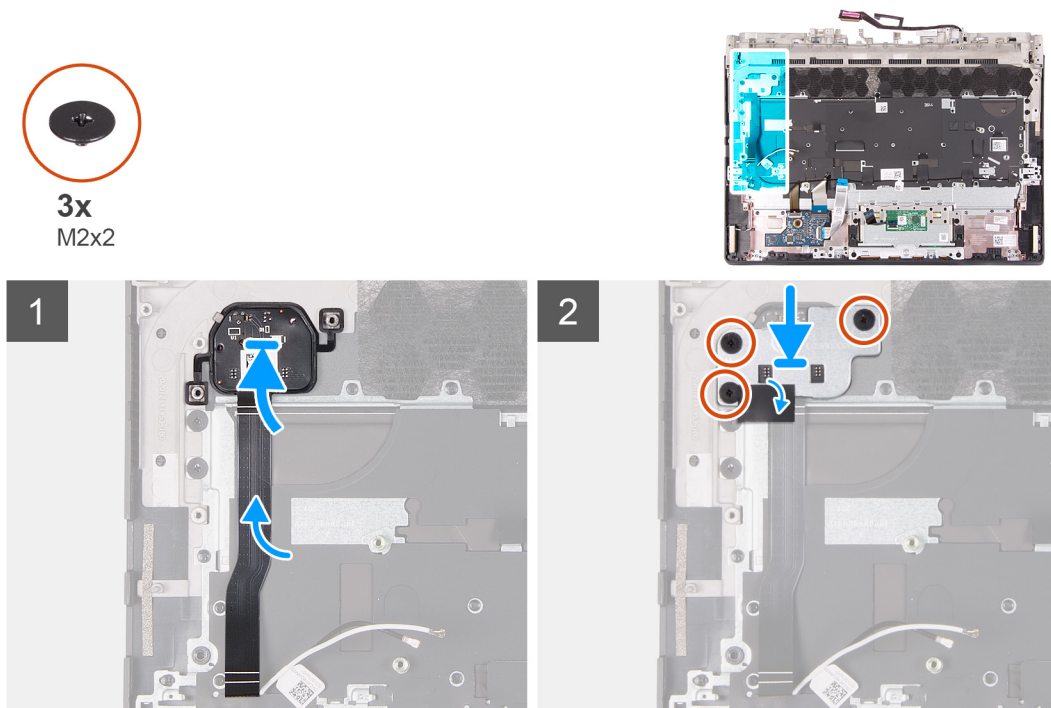

Steps

1. Place the power button on the slot on the palm-rest and keyboard assembly.
2. Align the screw holes on the power-button bracket with the screw holes on the palm-rest and keyboard assembly.
3. Replace the three screws (M2x2) that secure the power-button bracket to the palm-rest and keyboard assembly.

Next steps

1. Follow the procedure from step 4 to step 20 in [Installing the system board](#).
2. Install the [rear I/O-cover](#).
3. Install the [battery](#).
4. Install the [display assembly](#).
5. Install the [wireless card](#).
6. Install the [memory module](#).
7. Install the [I/O board](#).
8. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
9. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
10. Install the [base cover](#).
11. Follow the procedure in [After working inside your computer](#).

Palm-rest and keyboard assembly

Removing the palm-rest and keyboard assembly

Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
4. Remove the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
5. Remove the [I/O board](#).
6. Remove the [memory module](#).
7. Remove the [wireless card](#).
8. Remove the [display assembly](#).
9. Remove the [battery](#).
10. Remove the [rear I/O-cover](#).
11. Follow the procedure from step 1 to step 16 in [Removing the system board](#).


ⓘ **NOTE:** System board can be removed with the heat sink and USB board attached.

12. Remove the [power button](#).

About this task

After performing the steps in the pre-requisites, we are left with the palm-rest and keyboard assembly.

ⓘ **NOTE:** When replacing the palm-rest and keyboard assembly, the solid-state drive mounting brackets have to be removed from the existing palm-rest and keyboard assembly and transferred to the replacement palm-rest and keyboard assembly.

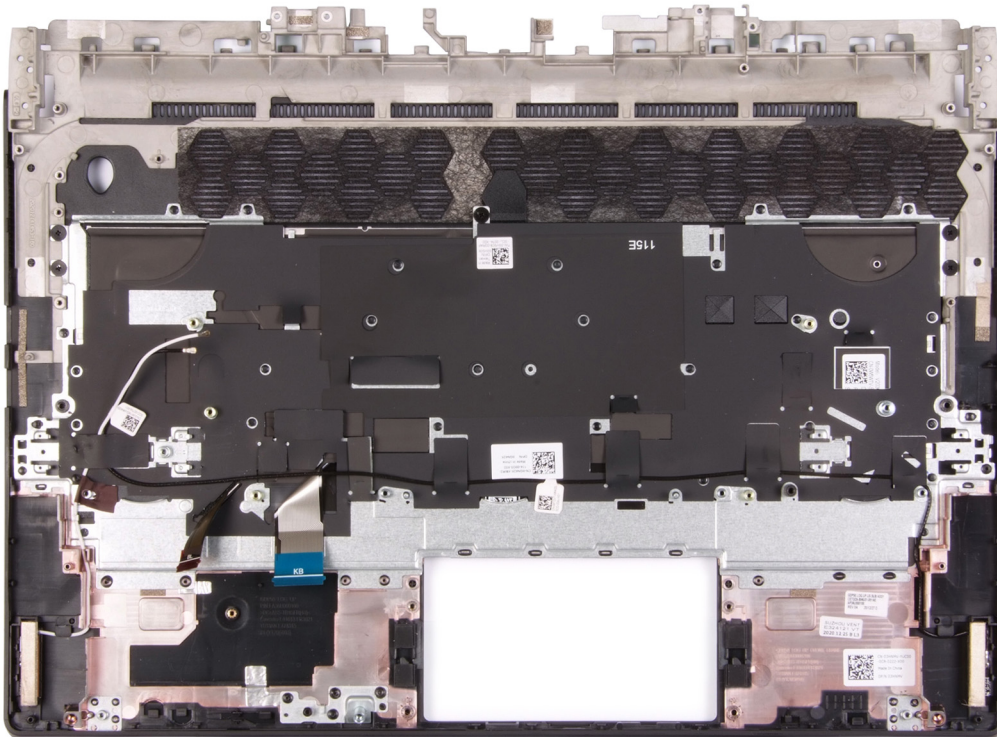

Installing the palm-rest and keyboard assembly


Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

Place the palm-rest and keyboard assembly on a flat surface.

- NOTE:** When replacing the palm-rest and keyboard assembly, the solid-state drive mounting brackets have to be transferred from the old palm-rest and keyboard assembly to the replacement palm-rest and keyboard assembly.

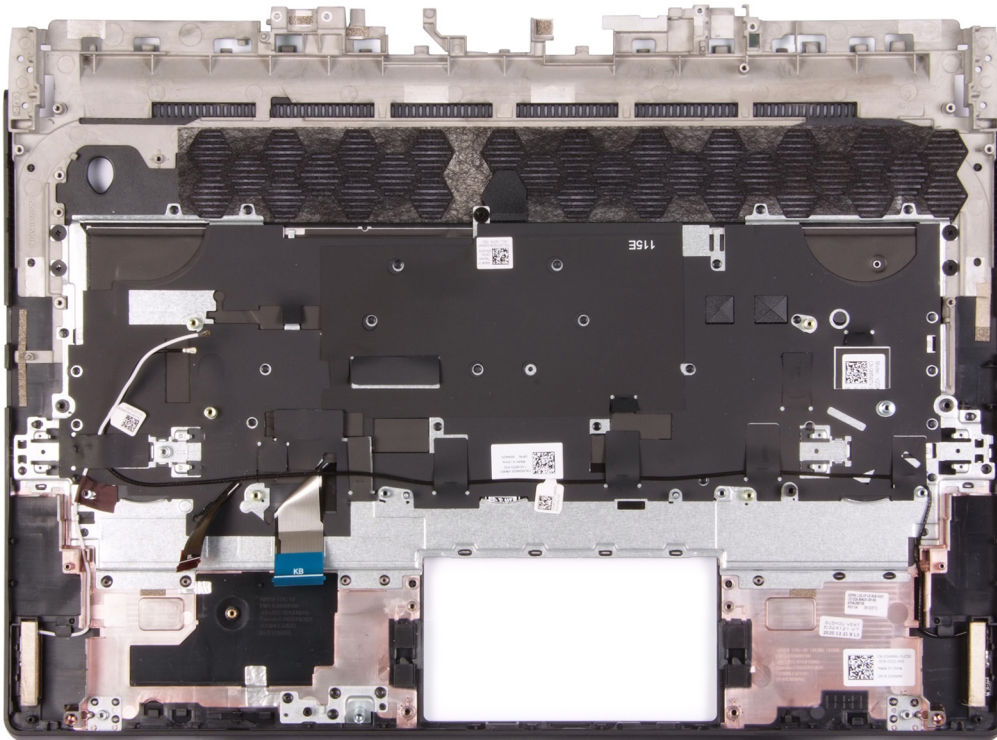

Next steps

1. Install the [power button](#).
2. Follow the procedure from step 4 to step 20 in [Installing the system board](#).
3. Install the [rear I/O-cover](#).
4. Install the [battery](#).
5. Install the [display assembly](#).
6. Install the [wireless card](#).
7. Install the [memory module](#).
8. Install the [I/O board](#).
9. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot one](#), whichever applicable.
10. Install the [2230 solid-state drive](#) or [2280 solid-state drive in SSD slot two](#), whichever applicable.
11. Install the [base cover](#).
12. Follow the procedure in [After working inside your computer](#).

Drivers and downloads

When troubleshooting, downloading or installing drivers it is recommended that you read the Dell Knowledge Based article, Drivers and Downloads FAQ [SLN128938](#).

System setup

 **CAUTION:** Unless you are an expert computer user, do not change the settings in the BIOS Setup program. Certain changes can make your computer work incorrectly.

 **NOTE:** Before you change BIOS Setup program, it is recommended that you write down the BIOS Setup program screen information for future reference.

Use the BIOS Setup program for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the size of the hard drive.
- Change the system configuration information.
- Set or change a user-selectable option, such as the user password, type of hard drive installed, and enabling or disabling base devices.

BIOS overview

The BIOS manages data flow between the computer's operating system and attached devices such as hard disk, video adapter, keyboard, mouse, and printer.

Entering BIOS setup program

Steps

1. Turn on (or restart) your computer.
2. During POST, when the DELL logo is displayed, watch for the F2 prompt to appear, and then press F2 immediately.

 **NOTE:** The F2 prompt indicates that the keyboard is initialized. This prompt can appear very quickly, so you must watch for it, and then press F2. If you press F2 before the F2 prompt, this keystroke is lost. If you wait too long and the operating system logo appears, continue to wait until you see the desktop. Then, turn off your computer and try again.

Navigation keys

 **NOTE:** For most of the System Setup options, changes that you make are recorded but do not take effect until you restart the system.

Keys	Navigation
Up arrow	Moves to the previous field.
Down arrow	Moves to the next field.
Enter	Selects a value in the selected field (if applicable) or follow the link in the field.
Spacebar	Expands or collapses a drop-down list, if applicable.
Tab	Moves to the next focus area.
Esc	Moves to the previous page until you view the main screen. Pressing Esc in the main screen displays a message that prompts you to save any unsaved changes and restarts the system.

Boot Sequence

Boot Sequence allows you to bypass the System Setup–defined boot device order and boot directly to a specific device (for example: optical drive or hard drive). During the Power-on Self Test (POST), when the Dell logo appears, you can:

- Access System Setup by pressing F2 key
- Bring up the one-time boot menu by pressing F12 key

The one-time boot menu displays the devices that you can boot from including the diagnostic option. The boot menu options are:

- Removable Drive (if available)
- STXXXX Drive (if available)
 - ⓘ **NOTE:** XXX denotes the SATA drive number.
- Optical Drive (if available)
- SATA Hard Drive (if available)
- Diagnostics

The boot sequence screen also displays the option to access the System Setup screen.

System setup options

ⓘ **NOTE:** Depending on your computer and its installed devices, the items that are listed in this section may or may not appear.

Table 3. System setup options—Main menu

Main		
	System Time	Displays the current time in hh:mm:ss format.
	System Date	Displays the current date in mm/dd/yyyy format.
	BIOS Version	Displays the BIOS version.
	Product Name	Displays the model number of your computer.
	Service Tag	Displays the service tag of your computer.
	Asset Tag	Displays the asset tag of your computer.
	CPU Type	Displays the processor type.
	CPU Speed	Displays the processor speed.
	CPU ID	Displays the processor identification code.
	CPU Cache	
	L1 Cache	Displays the processor L1 cache size.
	L2 Cache	Displays the processor L2 cache size.
	L3 Cache	Displays the processor L3 cache size.
	M.2 PCIe SSD-1	Display the M.2 PCIe SSD device information of the computer.
	M.2 PCIe SSD-2	Display the M.2 PCIe SSD device information of the computer.
	AC Adapter Type	Displays the type of AC adapter.
	System Memory	Displays the size of memory installed.
	Memory Speed	Displays the speed of memory.
	Keyboard Type	Displays the type of keyboard installed on the computer.

Table 4. System setup options—Advance menu (continued)

Advance		
	Integrated NIC	Enables or disables the Integrated NIC. Default: Enabled
	USB Emulation	Enables or disables the USB emulation feature. This feature defines how the BIOS, in the absence of a USB-aware operating system, handles USB devices. USB emulation is always enabled during POST.

Table 4. System setup options—Advance menu (continued)

Advance	
	i NOTE: You cannot boot any type of USB device (floppy, hard drive, or memory key) when this option is off. Default: Enabled
USB PowerShare	Enables or disables USB PowerShare. Default: Enabled
USB Wake Support	Enables or disables the USB Wake Support. Default: Enabled
SATA Operation	Allows you to configure the operating mode of the integrated SATA hard drive controller. Default: AHCI
Adapter Warnings	Allows you to choose if the computer should display warning messages when you use AC adapters that are not supported by your computer. Default: Enabled
Function Key Behavior	Allows you to set function key or multimedia key as the default function key behavior. Default: Multimedia key
Keyboard Backlight with AC	Selects the timeout value for the keyboard backlight when an AC adapter is plugged into the computer. Default: 1 minute
Keyboard Backlight with Battery	Selects the timeout value for the keyboard backlight when the computer is running on battery power. Default: 1 minute
Battery Health	Displays the battery health.
Battery Charge Configuration	Set the battery charge settings with a preselected custom charge start and stop. Default: Adaptive
Advance Battery Charge Configuration	Set the battery charge settings with a preselected custom charge start and stop. Default: Adaptive
Power on LID open	Selects the power-on option when the display is open. Default: Disabled
Maintenance	
Data Wipe on next boot	Enables or disables data wipe on the next boot. Default: Disabled
BIOS Recovery from Hard Drive	Enables the user to recover from certain corrupted BIOS conditions from a recovery file on the user primary hard drive or an external USB key.
BIOS Auto-Recovery	Enables BIOS to automatically recover BIOS without user actions. Default: Disabled

Table 4. System setup options—Advance menu

Advance		
SupportAssist System Resolution		
Auto OS Recovery Threshold		Controls the automatic boot flow for SupportAssist System Resolution Console and for the Dell operating system Recovery tool. Default: 2
SupportAssist OS Recovery		Enables or disables the boot flow for the SupportAssist OS Recovery tool in the even of certain system errors. Default: Disabled

Table 5. System setup options—Security menu (continued)

Security		
Admin Password		Displays if the administrator password is clear or set.
System Password		Displays if the system password is clear or set. Default: Not Set
Admin Password		Allows you to set the administrator password. The administrator password controls access to the system setup utility.
System Password		Allows you to set the system password. The system password controls access to the computer at boot.
Password Change		Allows you to permit or deny system password or HDD password changes. Default: Permitted
Absolute®		Enables or disables the BIOS module interface of the optional Computrace Service from Absolute Software. Default: Deactivate
Absolute® Status		Enables or disables SED Block SID Authentication. Default: Disabled
Windows SMM Security Mitigations Table (WSMT)		Enables or disables the Windows SMM Security Mitigations Table. It allows the system firmware to confirm to the OS that certain security best practices have been implemented in the System Management Mode (SMM) software. Default: Disabled
Firmware TPM		Enable or disable the firmware TPM. Default: Enabled
PPI Bypass for Clear Command		Allows you to control the TPM Physical Presence Interface (PPI). When enabled, this setting will allow the OS to skip BIOS PPI user prompts when issuing the Clear command. Changes to this setting take effect immediately. Default: Disabled
UEFI Firmware Capsule Updates		Enables or disables BIOS updates through UEFI capsule update packages. Default: Enabled
Secure Boot		Enables or disables configuration of platform features on Dell Client Systems with WSMT-enabled BIOS.

Table 5. System setup options—Security menu

Security
Default: Enabled

Table 6. System setup options—Boot menu

Boot
Boot List Option Displays the boot options. Default: UEFI File Browser Add Boot Option Allows you to add the boot options. Windows Boot Manager Display boot options in Windows UEFI Boot Enables or disables UEFI boot. Default: Disabled

Table 7. System setup options—Exit menu

Exit
Exit Saving Changes Allows you to exit system setup and save your changes. Save Change Without Exit Allows you to save your changes without exiting the BIOS setup. Exit Discarding Changes Allows you to exit the BIOS setup without saving the changes. Load Optimal Defaults Allows you to restore default values for all system setup options. Discard Changes Allows you to load previous values for all system setup options.

System and setup password

Table 8. System and setup password

Password type	Description
System password	Password that you must enter to log on to your system.
Setup password	Password that you must enter to access and make changes to the BIOS settings of your computer.

You can create a system password and a setup password to secure your computer.

 **CAUTION:** The password features provide a basic level of security for the data on your computer.

 **CAUTION:** Anyone can access the data stored on your computer if it is not locked and left unattended.

 **NOTE:** System and setup password feature is disabled.

Assigning a system setup password

Prerequisites

You can assign a new **System or Admin Password** only when the status is in **Not Set**.

About this task

To enter the system setup, press F2 immediately after a power-on or reboot.

Steps

1. In the **System BIOS** or **System Setup** screen, select **Security** and press **Enter**.
The **Security** screen is displayed.
2. Select **System/Admin Password** and create a password in the **Enter the new password** field.
Use the following guidelines to assign the system password:
 - A password can have up to 32 characters.
 - The password can contain the numbers 0 through 9.
 - Only lower case letters are valid, upper case letters are not allowed.
 - Only the following special characters are allowed: space, ("), (+), (,), (-), (.), (/), (;), ([), (\), (]), (').
3. Type the system password that you entered earlier in the **Confirm new password** field and click **OK**.
4. Press **Esc** and a message prompts you to save the changes.
5. Press **Y** to save the changes.
The computer reboots.

Deleting or changing an existing system setup password

Prerequisites

Ensure that the **Password Status** is Unlocked (in the System Setup) before attempting to delete or change the existing System and Setup password. You cannot delete or change an existing System or Setup password, if the **Password Status** is Locked.

About this task

To enter the System Setup, press **F2** immediately after a power-on or reboot.

Steps

1. In the **System BIOS** or **System Setup** screen, select **System Security** and press **Enter**.
The **System Security** screen is displayed.
2. In the **System Security** screen, verify that **Password Status** is **Unlocked**.
3. Select **System Password**, alter or delete the existing system password and press **Enter** or **Tab**.
4. Select **Setup Password**, alter or delete the existing setup password and press **Enter** or **Tab**.
 **NOTE:** If you change the System and/or Setup password, re enter the new password when prompted. If you delete the System and Setup password, confirm the deletion when prompted.
5. Press **Esc** and a message prompts you to save the changes.
6. Press **Y** to save the changes and exit from System Setup.
The computer restarts.

Clearing CMOS settings

About this task

 **CAUTION:** Clearing CMOS settings will reset the BIOS settings on your computer.

Steps

1. Remove the [base cover](#).
2. Disconnect the battery cable from the system board.
3. Press the power button for 20 seconds.
4. Wait for one minute.
5. Connect the battery cable to the system board.

6. Install the [base cover](#).

Clearing BIOS (System Setup) and System passwords

About this task

To clear the system or BIOS passwords, contact Dell technical support as described at www.dell.com/contactdell.

 **NOTE:** For information on how to reset Windows or application passwords, refer to the documentation accompanying Windows or your application.

Troubleshooting

System-diagnostic lights

Power and battery-status light

The power and battery status light indicates the power and battery status of the computer. These are the power states:

Solid white:Power adapter is connected and the battery has more than 5% charge.

Amber:Computer is running on battery and the battery has less than 5% charge.

Off:

- Power adapter is connected, and the battery is fully charged.
- Computer is running on battery, and the battery has more than 5% charge.
- Computer is in sleep state, hibernation, or turned off.

The power and battery-status light may also blink red or blue according to pre-defined "beep codes" indicating various failures.

For example, the power and battery-status light blinks red two times followed by a pause, and then blinks blue three times followed by a pause. This 2,3 pattern continues until the computer is turned off, indicating no memory or RAM is detected.

The following table shows different power and battery-status light patterns and associated problems.

NOTE: The following diagnostic light codes and recommended solutions are intended for Dell service technicians to troubleshoot problems. You should only perform troubleshooting and repairs as authorized or directed by the Dell technical support team. Damage due to servicing that is not authorized by Dell is not covered by your warranty.

Table 9. Diagnostic-light LED codes

Diagnostic light codes	Problem description
2,1	Processor failure
2,2	System board: BIOS or ROM (Read-Only Memory) failure
2,3	No memory or RAM (Random-Access Memory) detected
2,4	Memory or RAM (Random-Access Memory) failure
2,6	System-board or chipset error
2,7	Display failure - SBIOS message
3,1	RTC power failure
3,3	Recovery image not found
3,4	Recovery image found but invalid
3,5	Power-rail failure
3,6	System BIOS Flash incomplete

Flashing BIOS (USB key)

Steps

1. Follow the procedure from step 1 to step 7 in "[Flashing the BIOS](#)" to download the latest BIOS setup program file.
2. Create a bootable USB drive. For more information see the knowledge base article [SLN143196](#) at www.dell.com/support.
3. Copy the BIOS setup program file to the bootable USB drive.
4. Connect the bootable USB drive to the computer that needs the BIOS update.

5. Restart the computer and press **F12** when the Dell logo is displayed on the screen.
6. Boot to the USB drive from the **One Time Boot Menu**.
7. Type the BIOS setup program filename and press **Enter**.
8. The **BIOS Update Utility** appears. Follow the instructions on the screen to complete the BIOS update.

Flashing the BIOS

About this task

You may need to flash (update) the BIOS when an update is available or when you replace the system board.

Follow these steps to flash the BIOS:

Steps

1. Turn on your computer.
2. Go to www.dell.com/support.
3. Click **Product support**, enter the Service Tag of your computer, and then click **Submit**.
 **NOTE:** If you do not have the Service Tag, use the auto-detect feature or manually browse for your computer model.
4. Click **Drivers & downloads > Find it myself**.
5. Select the operating system installed on your computer.
6. Scroll down the page and expand **BIOS**.
7. Click **Download** to download the latest version of the BIOS for your computer.
8. After the download is complete, navigate to the folder where you saved the BIOS update file.
9. Double-click the BIOS update file icon and follow the instructions on the screen.

Backup media and recovery options

It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows. Dell proposes multiple options for recovering Windows operating system on your Dell PC. For more information, see [Dell Windows Backup Media and Recovery Options](#).

WiFi power cycle

About this task

If your computer is unable to access the internet due to WiFi connectivity issues a WiFi power cycle procedure may be performed. The following procedure provides the instructions on how to conduct a WiFi power cycle:

 **NOTE:** Some ISPs (Internet Service Providers) provide a modem/router combo device.

Steps

1. Turn off your computer.
2. Turn off the modem.
3. Turn off the wireless router.
4. Wait for 30 seconds.
5. Turn on the wireless router.
6. Turn on the modem.
7. Turn on your computer.

Drain residual flea power (perform hard reset)

About this task

Flea power is the residual static electricity that remains in the computer even after it has been powered off and the battery is removed.

For your safety, and to protect the sensitive electronic components in your computer, you are requested to drain residual flea power before removing or replacing any components in your computer.

Draining residual flea power, also known as a performing a "hard reset", is also a common troubleshooting step if your computer does not power on or boot into the operating system.

To drain residual flea power (perform a hard reset)

Steps

1. Turn off your computer.
2. Disconnect the power adapter from your computer.
3. Remove the base cover.
4. Remove the battery.
5. Press and hold the power button for 20 seconds to drain the flea power.
6. Install the battery.
7. Install the base cover.
8. Connect the power adapter to your computer.
9. Turn on your computer.

 **NOTE:** For more information about performing a hard reset, see the knowledge base article [SLN85632](#) at www.dell.com/support.

Getting help and contacting Alienware

Self-help resources

You can get information and help on Alienware products and services using these online self-help resources:

Table 10. Alienware products and online self-help resources

Self-help resources	Resource location
Information about Alienware products and services	www.alienware.com
My Dell	
Tips	
Contact Support	In Windows search, type Contact Support , and press Enter .
Online help for operating system	www.dell.com/support/windows
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
VR Support	www.dell.com/VRsupport
Videos providing step-by-step instructions to service your computer	www.youtube.com/alienwareservices

Contacting Alienware

To contact Alienware for sales, technical support, or customer service issues, see www.alienware.com.

① **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

① **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.